

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P24G02M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:	UNIT TYPE:	MONITORED & SWITCHED PER OUTLET
	ORIENTATION:	VERTICAL, 0U FULL
	OUTLET QTY&TYPE:	(18) C13, (6) C19
	INPUT VOLTAGE:	200-240VAC
	INPUT CURRENT:	30A (24A DERATED)
	BREAKER QTY&TYPE:	(3) 20AMP, DOUBLE-POLE
	INPUT PHASE:	THREE-PHASE DELTA
	RATED POWER:	8.6kVA
	INPUT PLUG:	NEMA L15-30P
	INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
	REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1)QUICK-START GUIDE

NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL

5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION


IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24G02M-XX Y Z


XX: FINISHED GOOD COLOR BL =BLACK RD =RED WH =WHITE YL =YELLOW BU =BLUE GN =GREEN	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
---	---	--

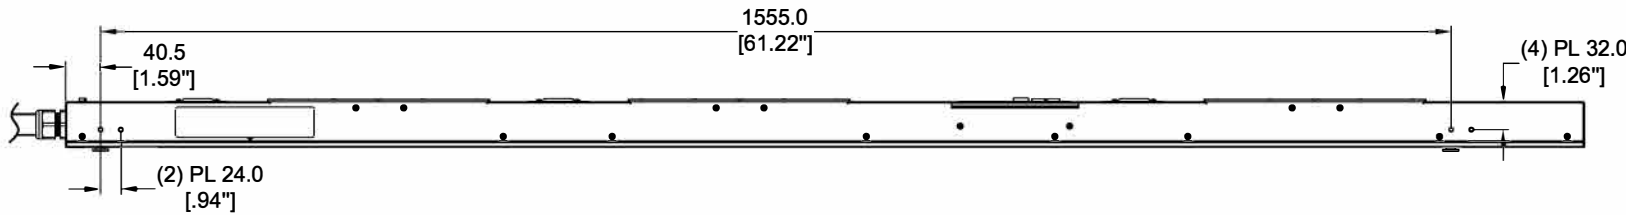


LEFT VIEW

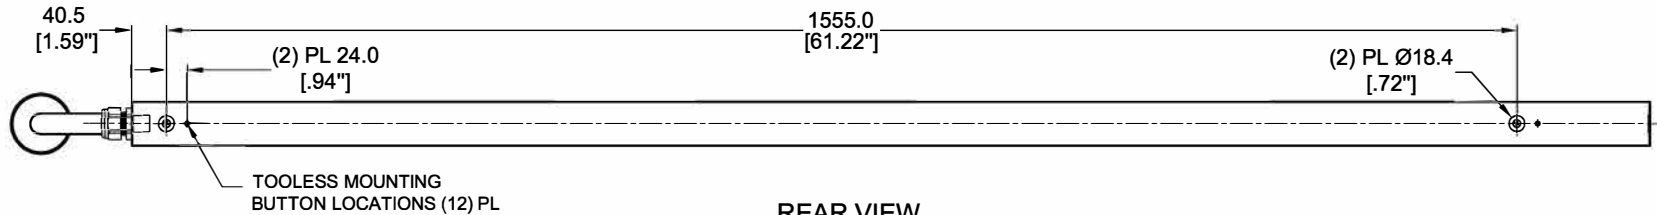

REAR VIEW

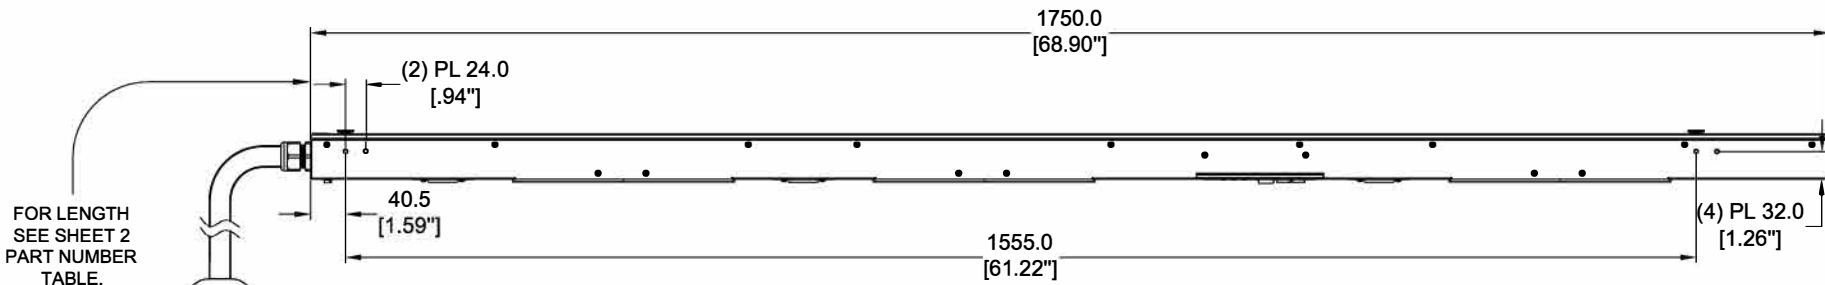

RIGHT VIEW

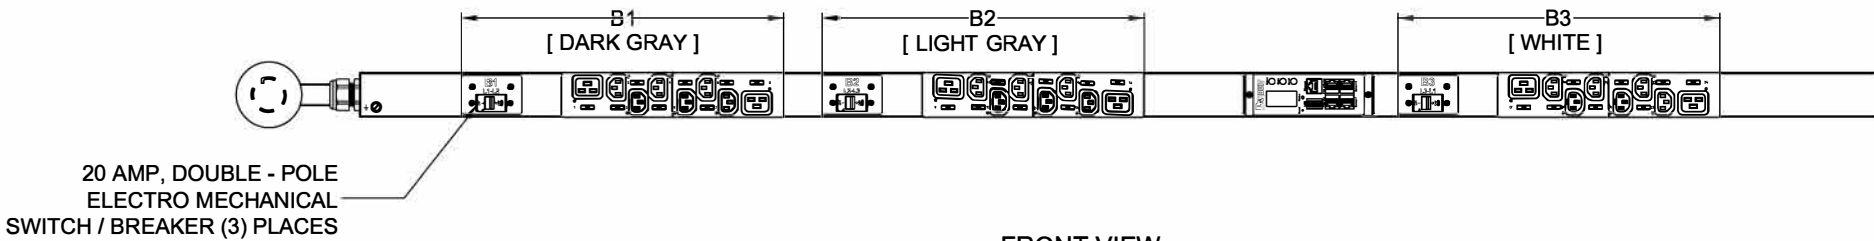

FRONT VIEW



BOTTOM VIEW

PLUG/RECEPTACLE BLOCK



PLUG
NEMA L15-30P, 3P 4W
30A, 250V, 3-PHASE MAX RATED INPUT
24A DERATED




RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT


REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION "DE-CODER"	P24G02M
01A	10/09/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24G02M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE		
INTELLIGENT SERIES PDU P24G02M-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		PANDUIT
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		MATERIAL/COLOR: N/A
 THIRD ANGLE PROJECTION		DRAWING NUMBER: P24G02M_DC
DRAWN BY GEORGE	DATE 10/09/2017	CHK SEAN
SCALE NONE		SHT 1 OF 2
		SCALE B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24G02M	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-EL1A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-BL1B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-RD1A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-RD1B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-RD1C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-WH1A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-WH1B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-WH1C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-YL1A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-YL1B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-YL1C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-BU1A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-BU1B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-BU1C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-GN1A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-GN1B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-GN1C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-EL2A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-BL2B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-BL2C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-RD2A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-RD2B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-RD2C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-WH2A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-WH2B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-WH2C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-YL2A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-YL2B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-YL2C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-BU2A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-BU2B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-BU2C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg
P24G02M-GN2A	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+3.5'/-1.75"]	8.4kg
P24G02M-GN2B	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7'/-3.5"]	8.9kg
P24G02M-GN2C	VERTICAL,(18) C13,(6) C19,MONITORED&SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10'/-5"]	9.4kg

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION "DE-CODER"	P24G02M
01A	10/09/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24G02M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P24G02M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		MATERIAL/COLOR: N/A	
 THIRD ANGLE PROJECTION		DRAWING NUMBER: P24G02M_DC	
DRAWN BY GEORGE	DATE 10/09/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2			SCALE B