



B

A

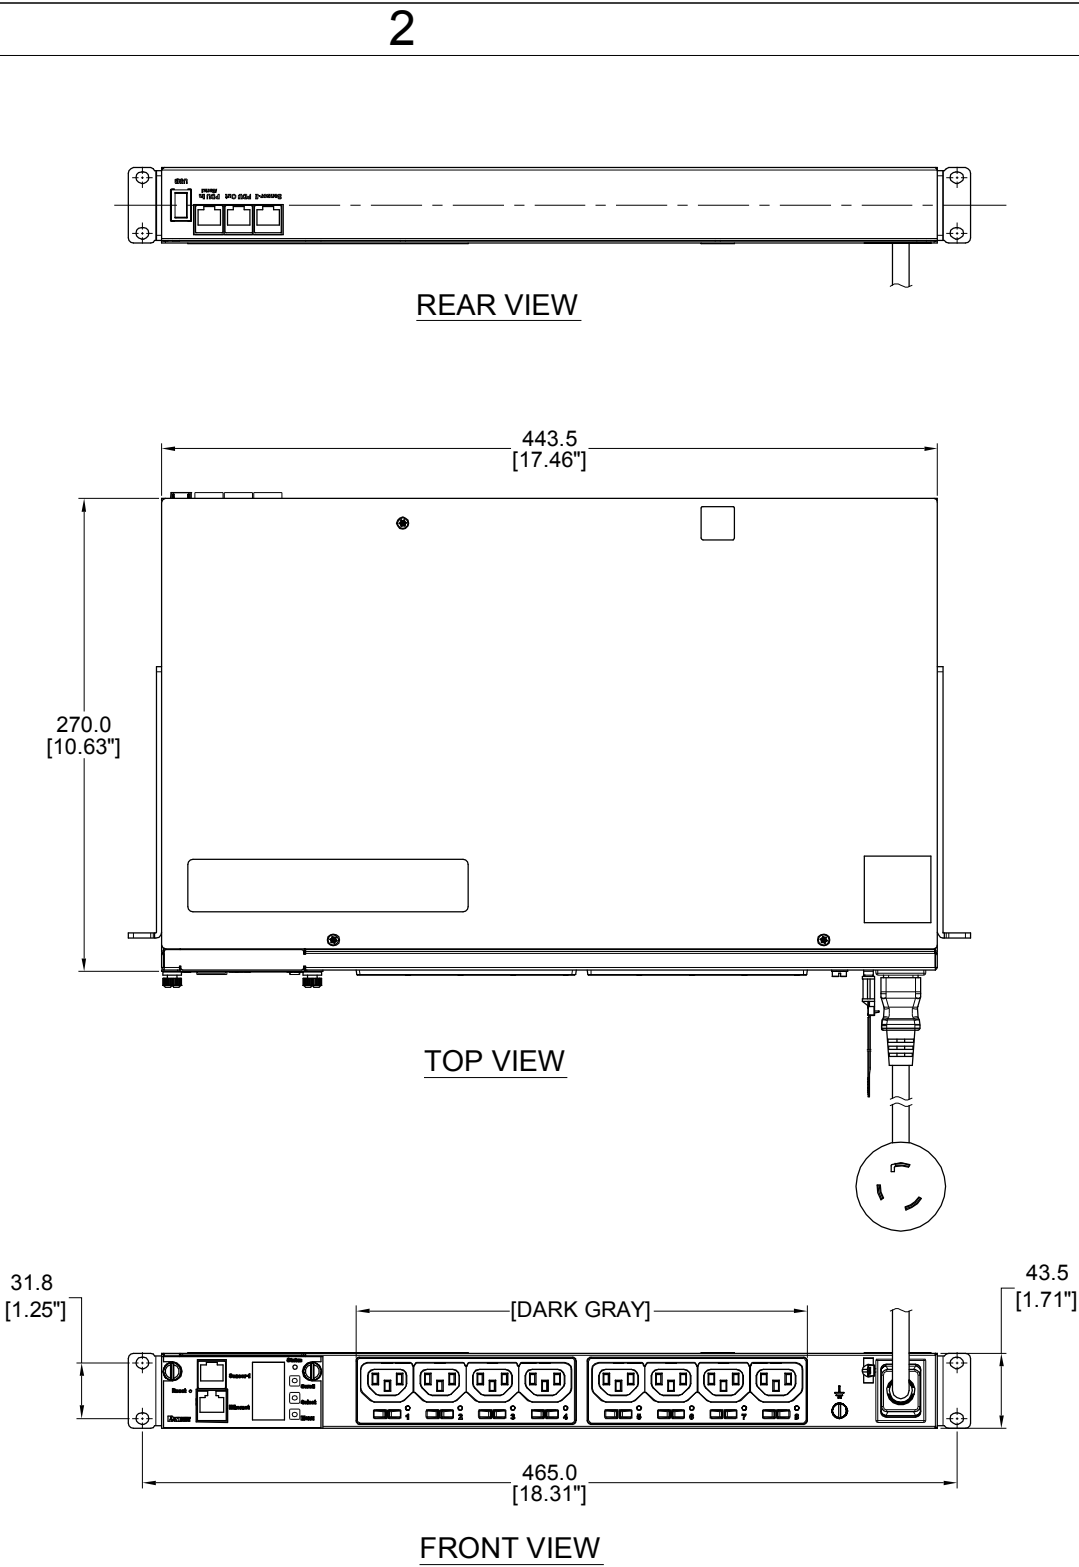

PLUG
20 AMP, 250V
TWIST LOCK
NEMA L6-20P

EIGHT (8)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

2




1

PANDUIT P/N	WEIGHT
P08E18M	5.9kg

NOTES:

- IDENTIFICATION:
 - UNIT TYPE: MONITORED SWITCHED
 - ORIENTATION: HORIZONTAL, 1U
 - OUTLET QTY&TYPE: (8) C13
 - BREAKER QTY&TYPE: N/A
 - INPUT VOLTAGE: 100-240VAC
 - INPUT CURRENT: 20A (16A DERATED)
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: 3.3kVA
 - INPUT PLUG: NEMA L6-20P
 - INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
 - POCKET GUIDE
 - QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
 - QTY: (4) M6 CAGED NUT
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 3.3kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

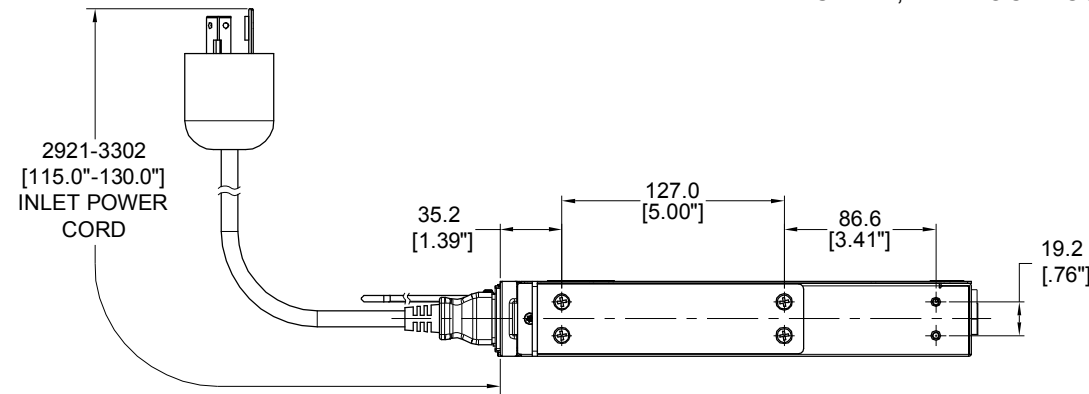

SIDE VIEW

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	07/19/2017	WSJ	MIM	EDM	INITIAL RELEASE	P08E18M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P08E18M CUSTOMER DRAWING			
ITEM REVISION NAME		PANDUIT	
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P08E18M_DC	
DRAWN BY WSJ	DATE 07/19/2017	CHK SEAN	SCALE NONE
SHT 1 OF 1		SCALE B	

1