
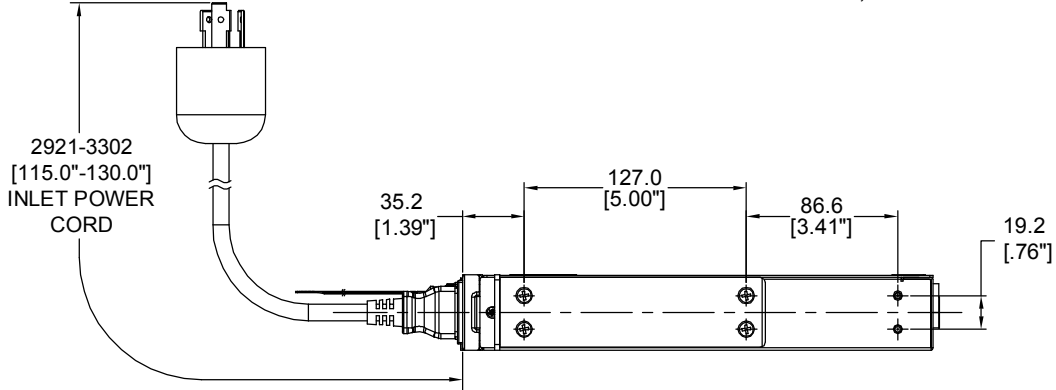



B

A

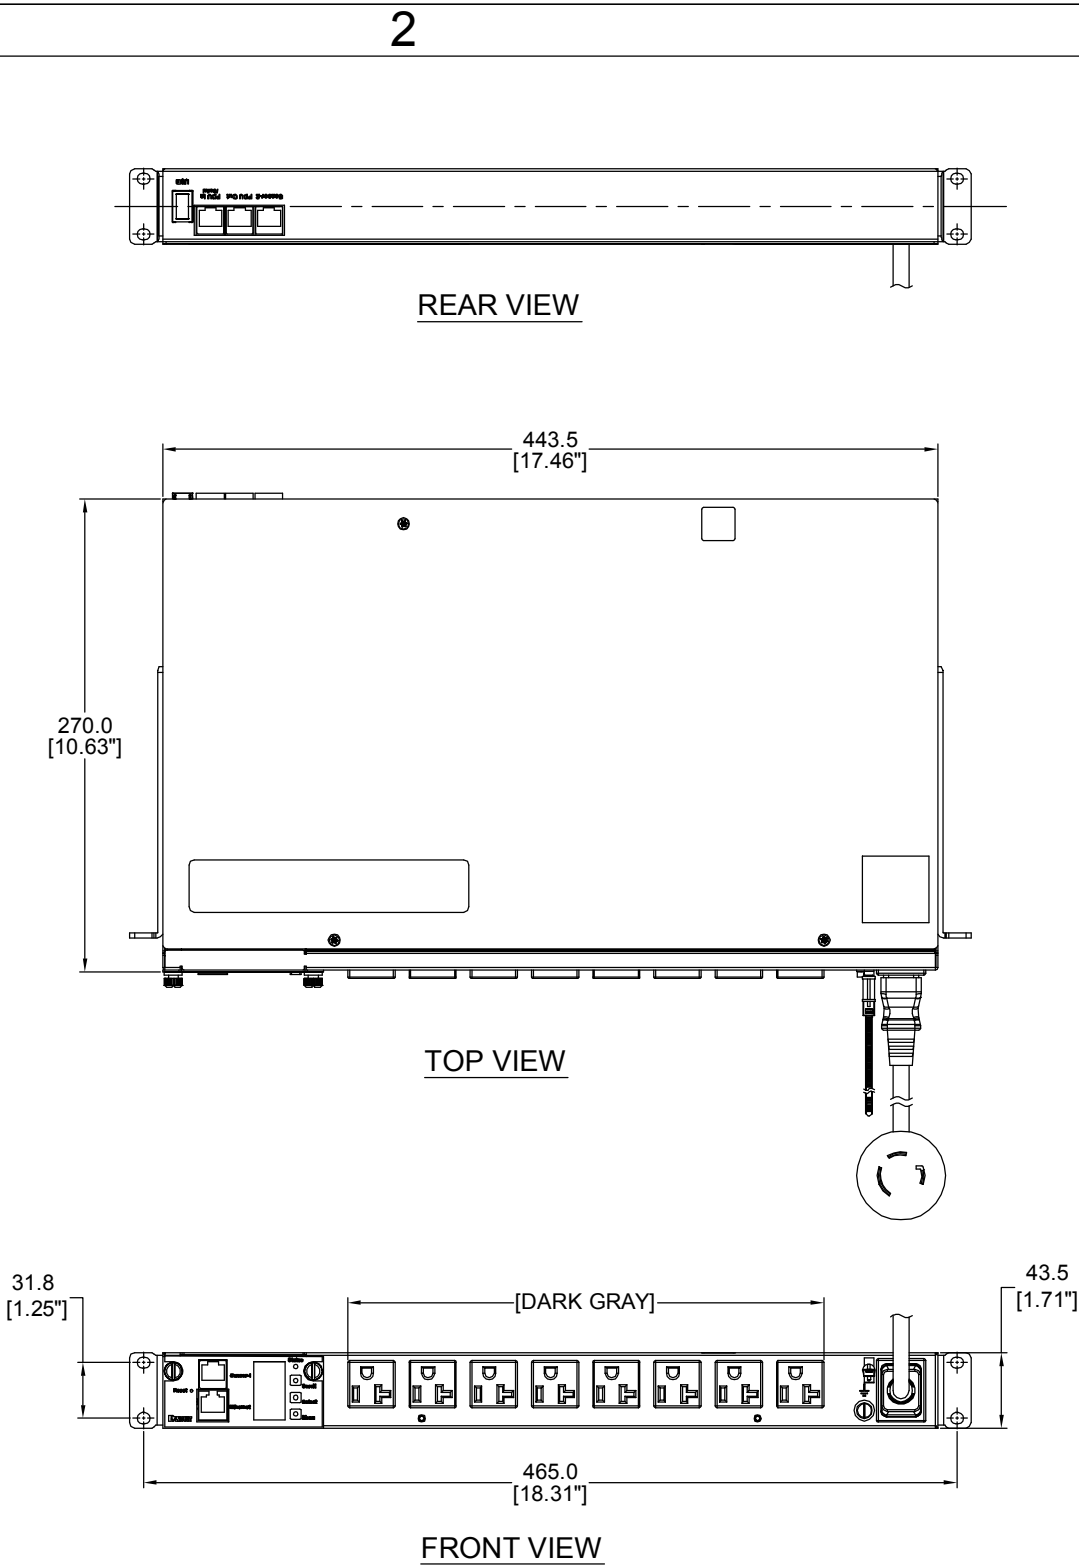


PANDUIT P/N	WEIGHT
P08D11M	5.8kg

- NOTES:
1. IDENTIFICATION:
UNIT TYPE: MONITORED INPUT
ORIENTATION: HORIZONTAL, 1U
OUTLET QTY&TYPE: (8) 5-20R
BREAKER QTY&TYPE: N/A
INPUT VOLTAGE: 100-120VAC
INPUT CURRENT: 20A (16A DERETED)
INPUT PHASE: SINGLE-PHASE
RATED POWER: 1.9kVA
INPUT PLUG: NEMA L5-20P
INPUT CORD LENGTH: 3m [10']
 2. ACCESSORIES:
POCKET GUIDE
QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
QTY: (4) M6 CAGED NUT
 3. RoHS COMPLIANT
 4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
 5. MAXIMUM ALLOWABLE INPUT POWER = 1.9kW
 6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES



PLUG
20 AMP, 125V
STRAIGHT BLADE
NEMA L5-20P



EIGHT (8)
RECEPTACLES
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20R

01A	07/19/2017	WSJ	MIM	EDM	INITIAL RELEASE	P08D11M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P08D11M CUSTOMER DRAWING			
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION 		DRAWING NUMBER: P08D11M_DC	
DRAWN BY WSJ	DATE 07/19/2017	CHK SEAN	SCALE NONE
SHT 1 OF 1		SCALE B	