

2

1

PANDUIT P/N	WEIGHT
P08D10M	5.8kg

NOTES:

1. IDENTIFICATION:
- UNIT TYPE:

ORIENTATION:

OUTLET QTY&TYPE:

BREAKER QTY&TYPE:

INPUT VOLTAGE:

INPUT CURRENT:

INPUT PHASE:

RATED POWER:

INPUT PLUG:

INPUT CORD LENGTH:
- MONITORED INPUT

HORIZONTAL, 1U

(8) 5-20R

N/A

100-120VAC

20A (16A DERETED)

SINGLE-PHASE

1.9kVA


NEMA 5-20P

3m [10']
2. ACCESSORIES:
- POCKET GUIDE



QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS

QTY: (4) M6 CAGED NUT
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 1.9kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES


REAR VIEW

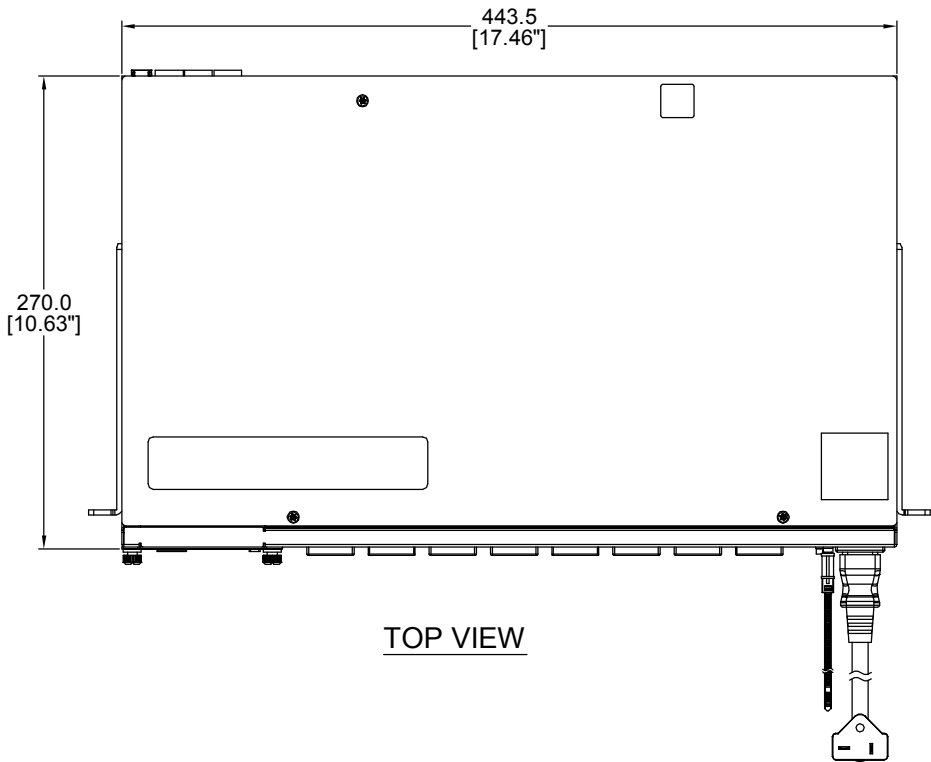


TOP VIEW

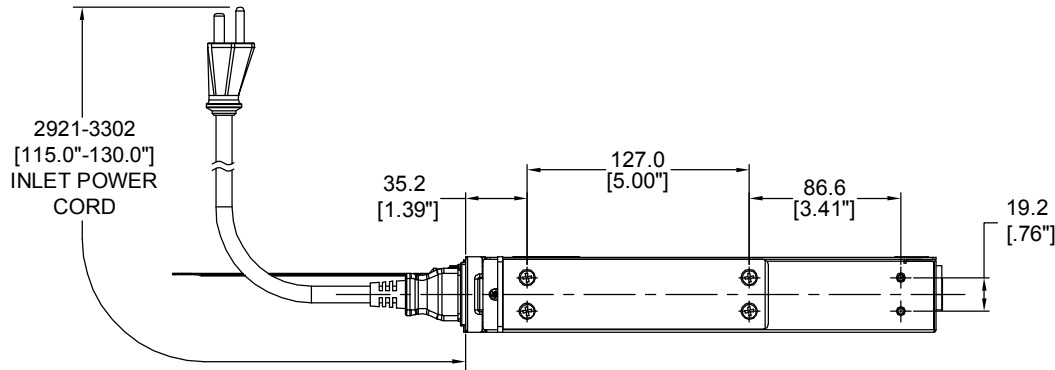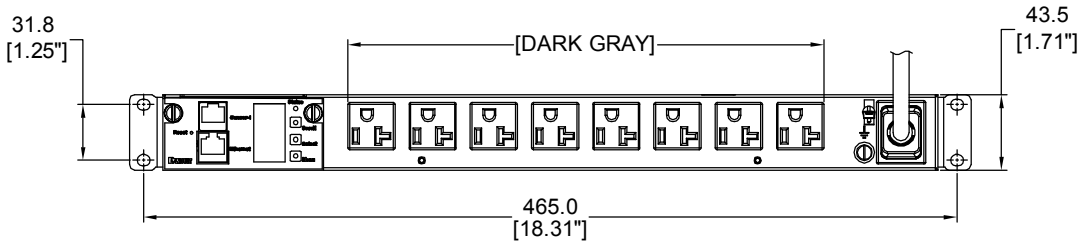

SIDE VIEW




PLUG
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20P



EIGHT (8)
RECEPTACLES
20 AMP, 125V
STRAIGHT BLADE
NEMA 5-20R

01A	07/19/2017	WSJ	MIM	EDM	INITIAL RELEASE	P08D10M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE		INTELLIGENT SERIES PDU P08D10M CUSTOMER DRAWING	
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION		N/A	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER:	
		P08D10M_DC	
DRAWN BY	DATE	CHK	SCALE
WSJ	07/19/2017	SEAN	NONE
		SHT 1 OF 1	
		SCALE B	