

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N

WEIGHT

P48F19M-XXYZ

SEE SHEET 2

SPECIFICATION:

1. STANDARD:
- | | |
|----------------------|-----------------------------------|
| UNIT TYPE: | MONITORED OUTLET |
| ORIENTATION: | VERTICAL, 0U FULL, 2-SIDED |
| OUTLET QTY & TYPE: | (36)C13, (12) C19 |
| INPUT VOLTAGE: | 200-240VAC |
| INPUT CURRENT: | 60A (48A DERATED) |
| BREAKER QTY & TYPE: | (6)20AMP, DOUBLE-POLE |
| INPUT PHASE: | THREE-PHASE DELTA |
| RATED POWER: | 17.3kVA |
| INPUT PLUG: | IEC 60309 3P+E 9H 60A |
| INPUT POWER CORD: | SEE SHEET 2 FOR PART NUMBER TABLE |
| REGULATORY STANDARD: | RoHS COMPLIANT |
2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE

SHEET 2 CONFIGURABLE PART NUMBERS: **P48F19M-XX Y Z**

XX: FINISHED GOOD COLOR
BL=BLACK
RD=RED
WH=WHITE
YL=YELLOW
BU=BLUE
GN=GREEN


Y: INPUT FEED TYPE
1=TOP-END FED
2=BOTTOM-END FED

Z: INPUT CORD LENGTH
A=1 METER
B=2 METER
C=3 METER

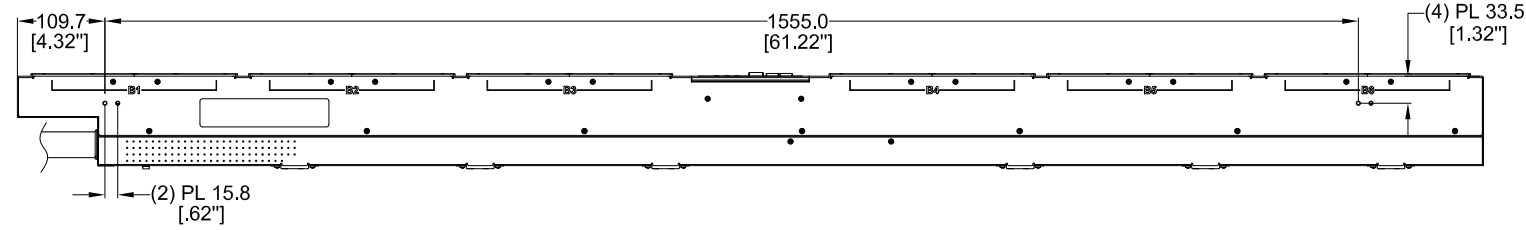


LEFT VIEW


20 AMP, DOUBLE - POLE
ELECTRO MECHANICAL
SWITCH / BREAKER (6) PLACES

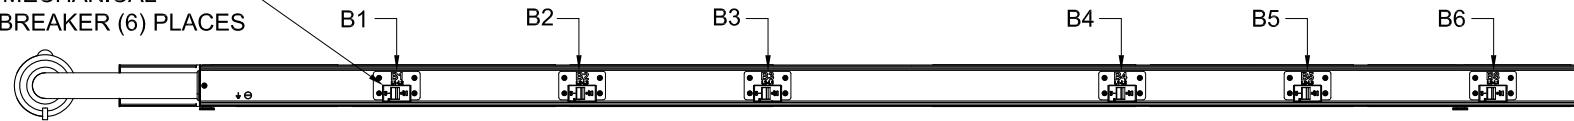


REAR VIEW

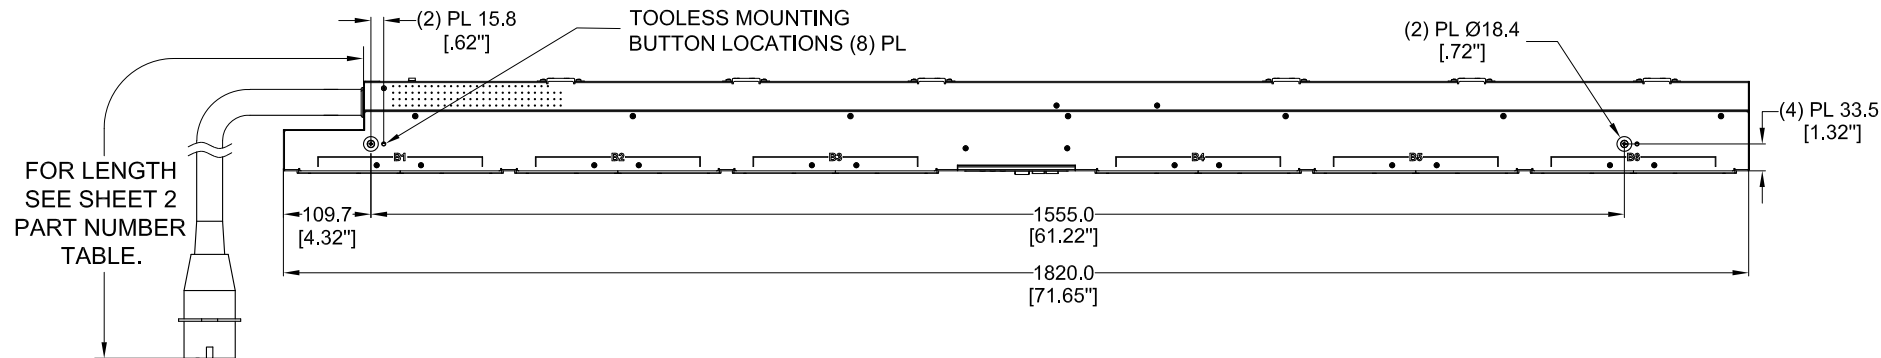

RIGHT VIEW

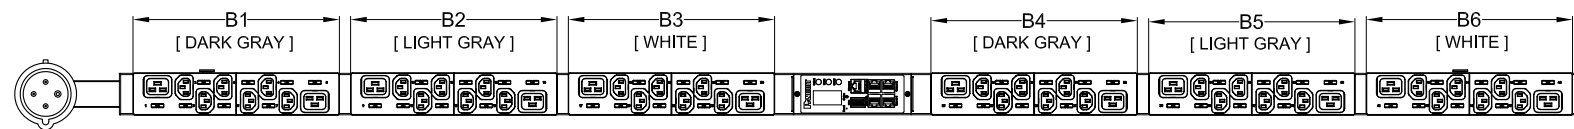

FRONT VIEW



BOTTOM VIEW

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 3P 4W, 9H
IP44 (SPLASHPROOF)
60A, 250V, 3 - PHASE MAX RATED INPUT
48A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P48F19M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P48F19M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE: INTELLIGENT SERIES PDU P48F19M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER: P48F19M_DC	
DRAWN BY GEORGE	DATE 10/11/2017	CHK SEAN	SCALE NONE
SHT 1 OF 2		SCALE B	



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P48F19M	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-BL1A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-BL1B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-RD1A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-RD1B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-RD1C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-WH1A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-WH1B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-WH1C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-YL1A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-YL1B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-YL1C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-BU1A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-BU1B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-BU1C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-GN1A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-GN1B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-GN1C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-BL2A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-BL2B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-BL2C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-RD2A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-RD2B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-RD2C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-WH2A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-WH2B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-WH2C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-YL2A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-YL2B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-YL2C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-BU2A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-BU2B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-BU2C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg
P48F19M-GN2A	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	13.9kg
P48F19M-GN2B	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	15.2kg
P48F19M-GN2C	VERTICAL,(36) C13,(12) C19,MONITORED OUTLET,200-240V/60A/THREE-PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	16.5kg

B



A

02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P48F19M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P48F19M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT
TITLE: INTELLIGENT SERIES PDU P48F19M-XYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0 THIRD ANGLE PROJECTION		MATERIAL/COLOR: N/A
DRAWN BY: DATE: GEORGE 10/11/2017		CHK: SCALE: SEAN NONE
SHT 2 OF 2		SCALE: B

B



A

