


PANDUIT P/N	WEIGHT
P36E35M-XXYZ	SEE SHEET 2

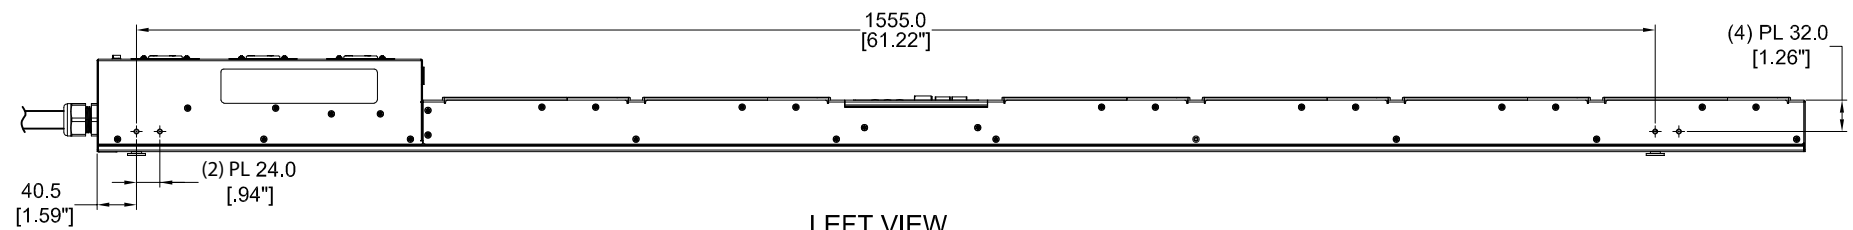

SPECIFICATION:






- | | |
|-----------------------|------------------------|
| 1. STANDARD: | MONITORED SWITCHED |
| UNIT TYPE: | VERTICAL, 0U FULL |
| ORIENTATION: | (30)C13, (6)C19 |
| OUTLET QTY & TYPE: | 100-120/200-240VAC |
| INPUT VOLTAGE: | 30A (24A DERATED) |
| INPUT CURRENT: | (3) 20AMP, DOUBLE-POLE |
| BREAKER QTY & TYPE: | THREE-PHASE, WYE |
| INPUT PHASE: | 8.6 KVA |
| RATED POWER: | NEMA L21-30P |
| INPUT PLUG: | SEE SHEET 2 FOR PART |
| INPUT POWER CORD: | NUMBER TABLE |
| REGULATORY STANDARD: | RoHS COMPLIANT |
| 2. ADDITIONAL: | |
| NONE | |
| 3. ACCESSORIES: | |
| (1) QUICK-START GUIDE | |

NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P36E35M-XX Y Z

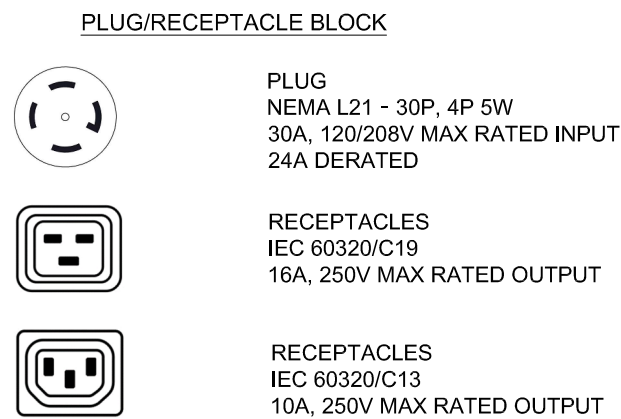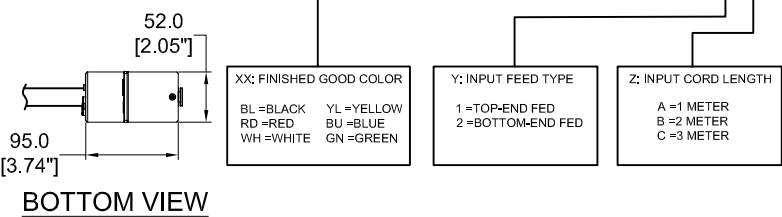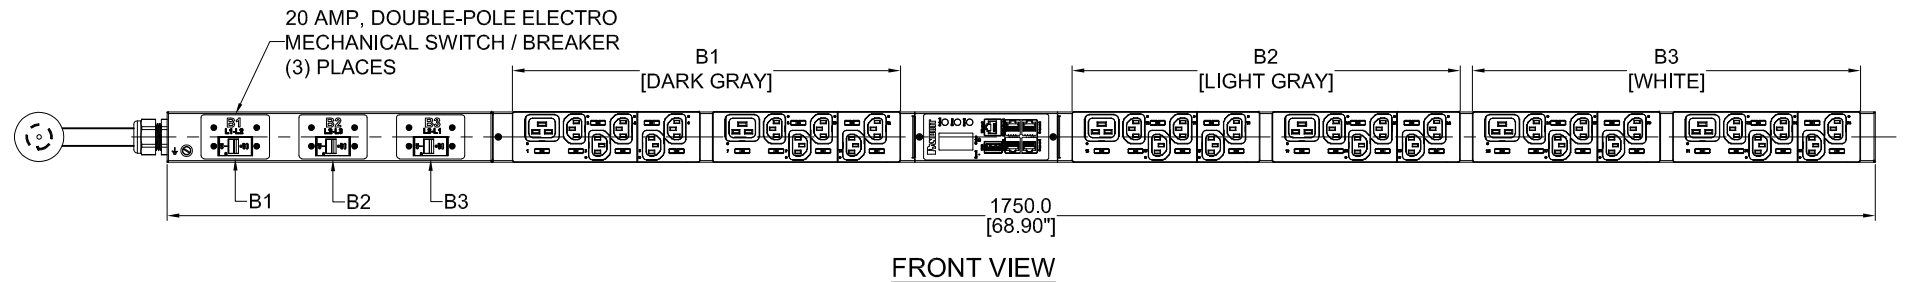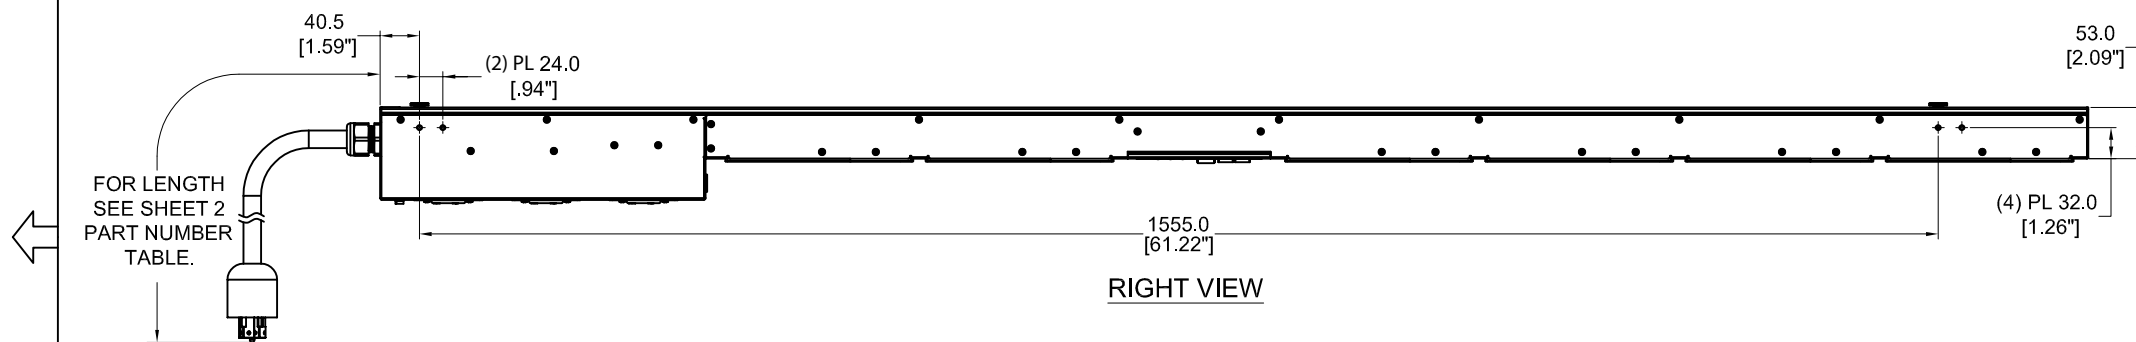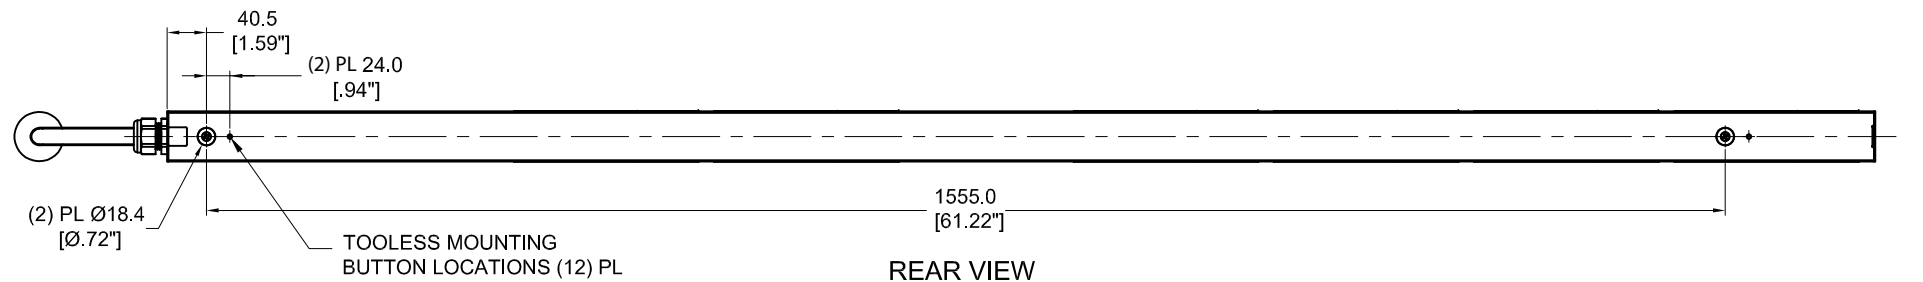

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36E35M
01A	10/09/2017	WSJ	MIM	EDM	INITIAL RELEASE	P36E35M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN _____ DATE _____ PRINT _____	
TITLE INTELLIGENT SERIES PDU P36E35M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
 THIRD ANGLE PROJECTION Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P36E35M_DC	
DRAWN BY DATE		SCALE	
WSJ 10/09/2017		SHT 1 OF 2	
CHK SEAN		SCALE NONE B	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36E35M	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-BL1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-BL1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-RD1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-RD1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-RD1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-WH1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-WH1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-WH1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-YL1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-YL1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-YL1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-BU1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-BU1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-BU1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-GN1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-GN1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-GN1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-BL2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-BL2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-BL2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-RD2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-RD2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-RD2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-WH2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-WH2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-WH2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-YL2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-YL2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-YL2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-BU2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-BU2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-BU2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg
P36E35M-GN2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	7.1kg
P36E35M-GN2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	7.7kg
P36E35M-GN2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,100-120/200-240V/30A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36E35M
01A	10/09/2017	WSJ	MIM	EDM	INITIAL RELEASE	P36E35M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE INTELLIGENT SERIES PDU P36E35M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
 THIRD ANGLE PROJECTION		DRAWING NUMBER: P36E35M_DC	
DRAWN BY WSJ	DATE 10/09/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2		SCALE B	