

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36G22M-XXYZ	SEE SHEET 2

SPECIFICATION:	
1. STANDARD:	
UNIT TYPE:	MONITORED & SWITCHED PER OUTLET
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(30) C13, (6) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY&TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE DELTA
RATED POWER:	8.6kVA
INPUT PLUG:	NEMA L15-30P
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT






2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1) QUICK-START GUIDE

- NOTES:
- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
 - INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
 - VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
 - FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
 - DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36G22M-XX Y Z

XX: FINISHED GOOD COLOR		Y: INPUT FEED TYPE	Z: INPUT CORD LENGTH
BL =BLACK	YL =YELLOW	1 =TOP-END FED	A =1 METER
RD =RED	BU =BLUE	2 =BOTTOM-END FED	B =2 METER
WH =WHITE	GN =GREEN		C =3 METER

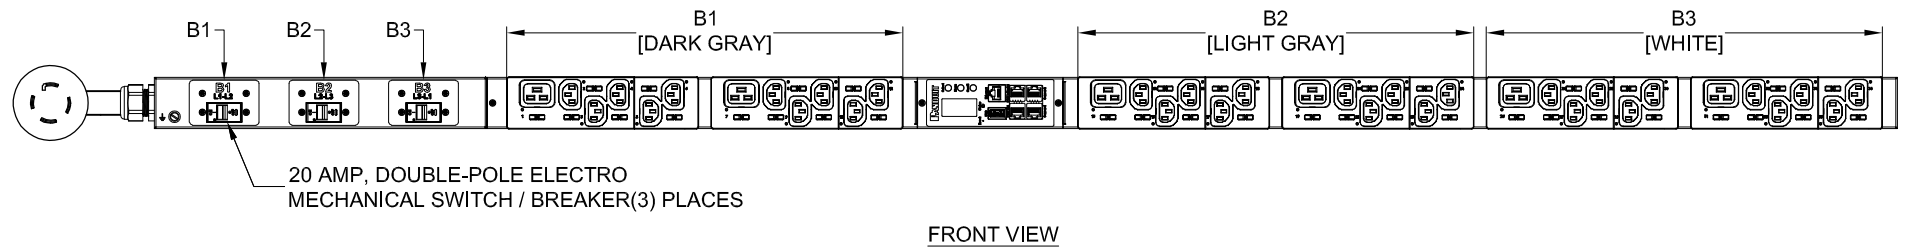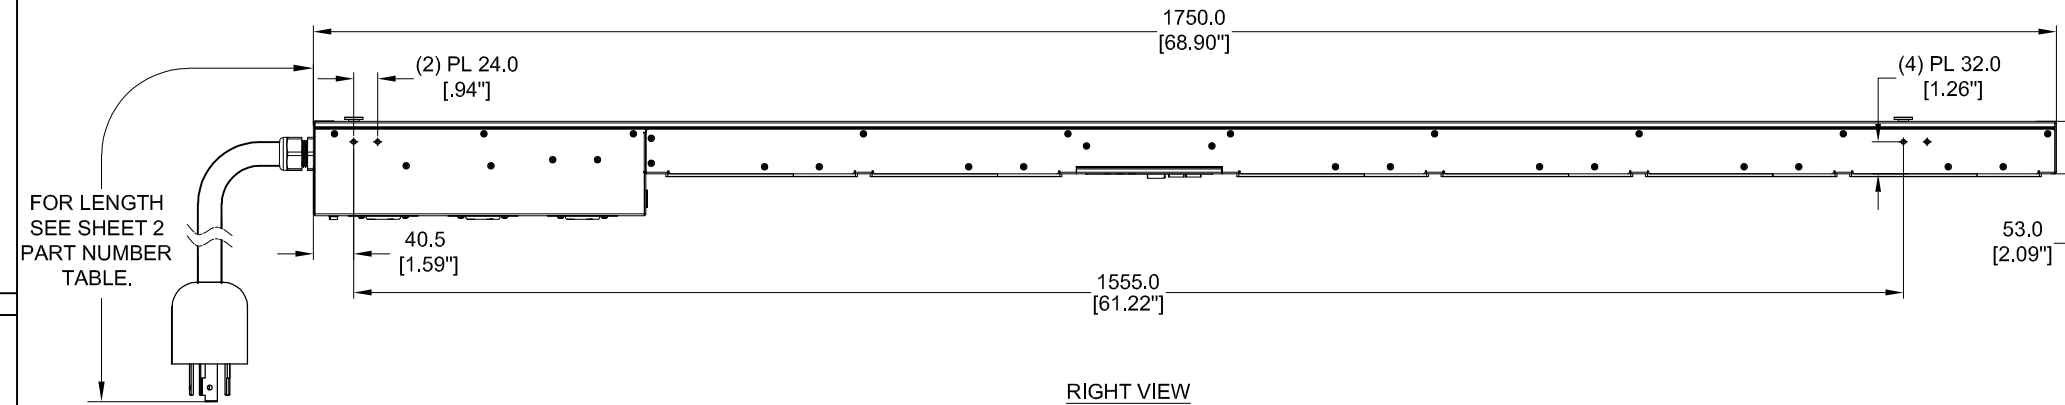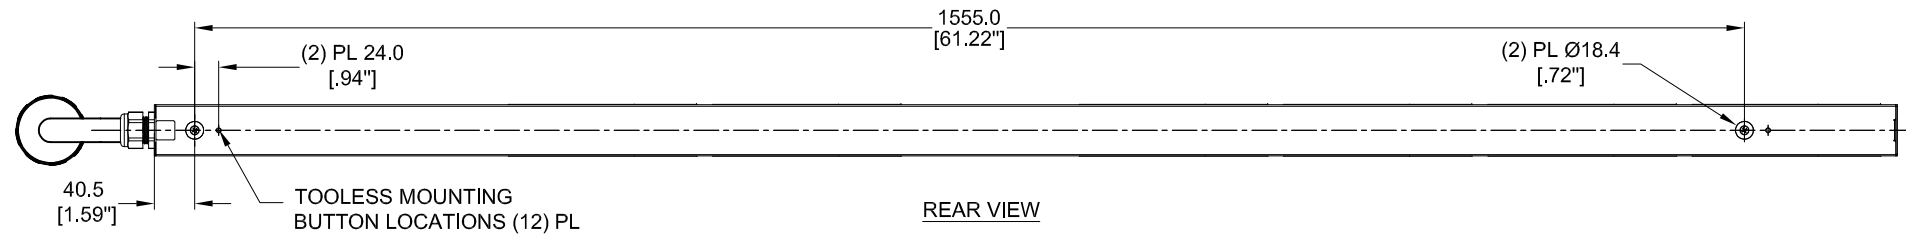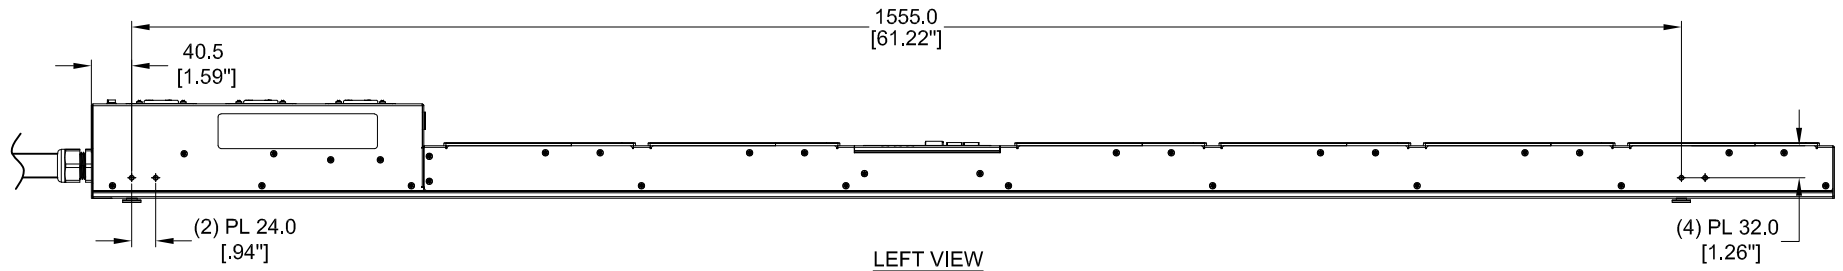

PLUG/RECEPTACLE BLOCK

PLUG
NEMA L15-30P, 3P 4W
30A, 250V, 3-PHASE MAX RATED INPUT
24A DERATED

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36G22M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36G22M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL, PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE		INTELLIGENT SERIES PDU P36G22M-XXYZ CUSTOMER DRAWING
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P36G22M_DC
DRAWN BY GEORGE	DATE 10/11/2017	CHK SEAN
SCALE NONE	SHT 1 OF 2	
		SCALE B

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36G22M	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCH-ED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-BL1A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCH-ED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-BL1B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCH-ED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-RD1A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-RD1B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-RD1C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-WH1A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCH-ED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-WH1B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCH-ED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-WH1C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCH-ED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-YL1A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCH-ED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-YL1B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCH-ED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-YL1C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCH-ED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-BU1A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-BU1B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-BU1C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-GN1A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-GN1B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-GN1C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-BL2A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-BL2B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-BL2C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-RD2A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-RD2B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-RD2C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-WH2A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-WH2B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-WH2C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-YL2A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-YL2B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-YL2C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-BU2A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-BU2B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-BU2C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg
P36G22M-GN2A	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+7"/-3.5"]	8.6kg
P36G22M-GN2B	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	9.0kg
P36G22M-GN2C	VERTICAL,(30) C13,(6) C19,MONITORED & SWITCHED PER OUTLET, 200-240V/30A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	9.4kg

B

B

A

A

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36G22M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36G22M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL, PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36G22M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER: P36G22M_DC	
DRAWN BY GEORGE	DATE 10/11/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2		SCALE B	

2



1