

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36G20M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:

UNIT TYPE:	MONITORED & SWITCHED PER OUTLET
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(30) C13, (6) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	50A (28A DERATED)
BREAKER QTY&TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE DELTA
RATED POWER:	10.0KVA
INPUT PLUG:	CS8365C
INPUT POWER CORD:	SEE SHEET 2 FOR NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:
NONE

3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]

2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES


3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART

4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL


5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36G20M-XX Y Z

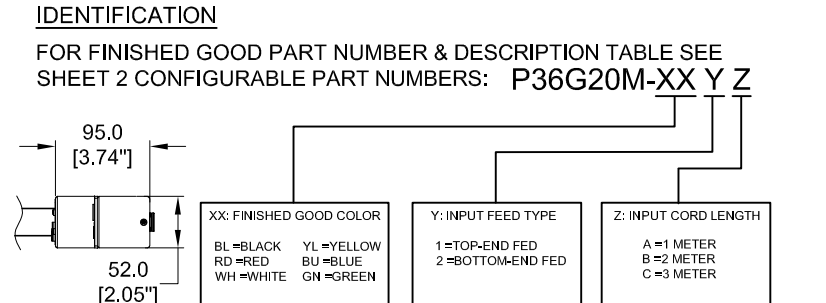


BOTTOM VIEW

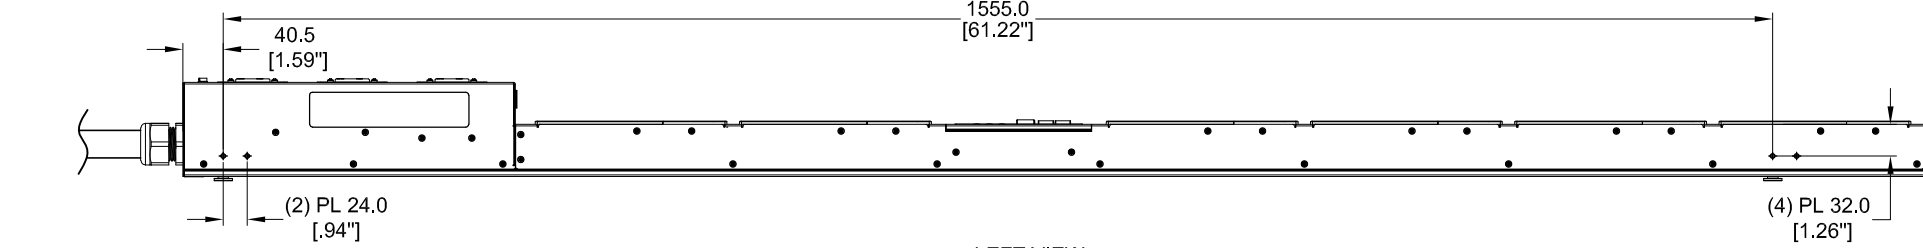


LEFT VIEW

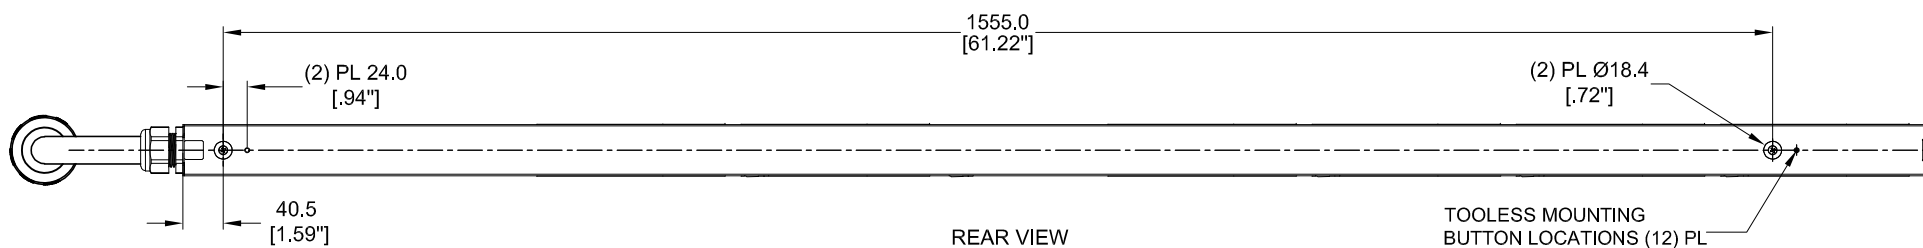

REAR VIEW

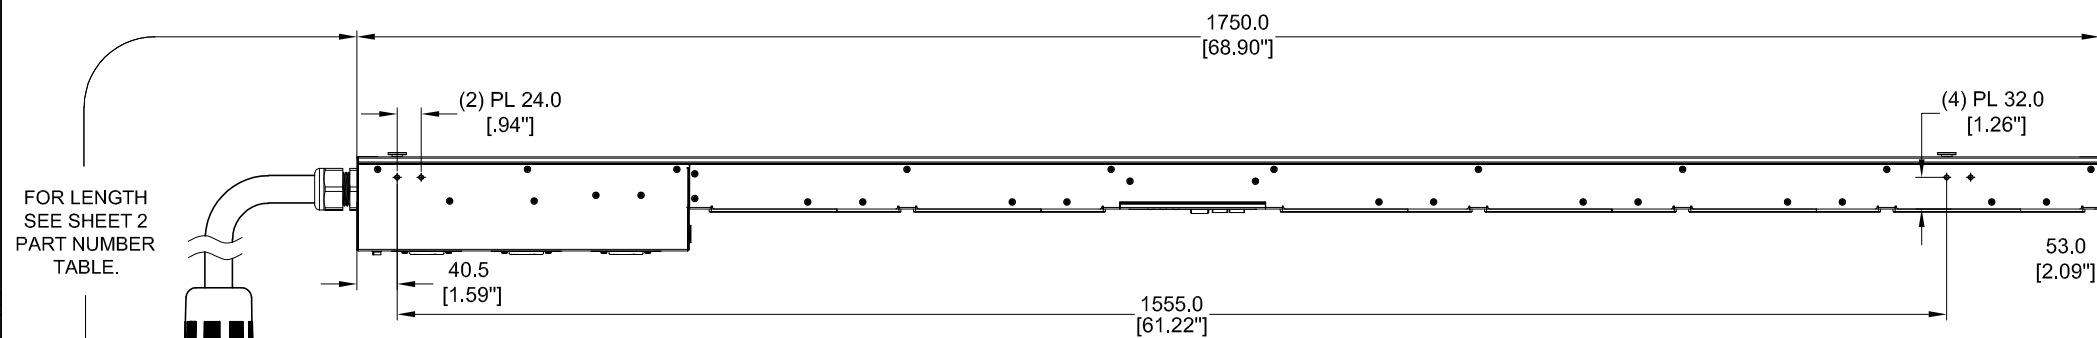

RIGHT VIEW

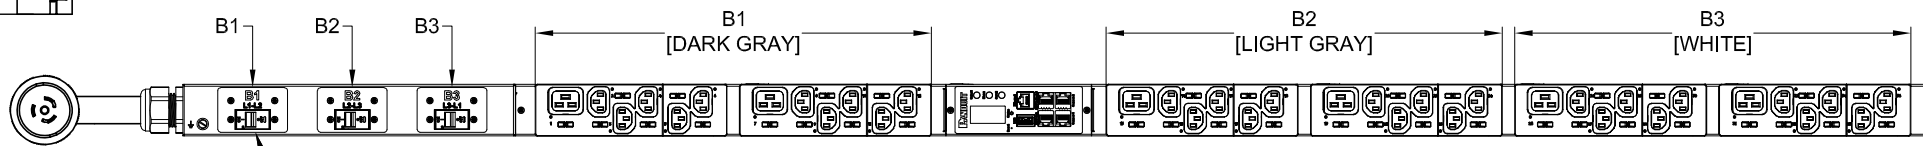

FRONT VIEW

PLUG/RECEPTACLE BLOCK



PLUG
CS8365C, 3P 4W
50A, 250V, 3-PHASE DELTA
MAX RATED INPUT
40A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36G20M
01A	09/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36G20M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36G20M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER: P36G20M_DC	
DRAWN BY GEORGE	DATE 09/11/2017	CHK SEAN	SCALE NONE
SHT 1 OF 2		SCALE B	



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36G20M	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-BL1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-BL1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-RD1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-RD1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-RD1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-WH1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-WH1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-WH1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-YL1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-YL1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-YL1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-BU1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-BU1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-BU1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-GN1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 P-HASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-GN1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 P-HASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-GN1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 P-HASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-BL2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-BL2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-BL2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-RD2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-RD2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-RD2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-WH2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-WH2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-WH2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-YL2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-YL2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-YL2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-BU2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-BU2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-BU2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg
P36G20M-GN2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[*7"/-3.5"]	8.4kg
P36G20M-GN2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[*7"/-3.5"]	9.3kg
P36G20M-GN2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED PER OUTLET, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[*10"/-5"]	10.2kg

02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36G20M
01A	09/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36G20M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE INTELLIGENT SERIES PDU P36G20M-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER: P36G20M_DC	
DRAWN BY GEORGE	DATE 09/11/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2		SCALE B	

