
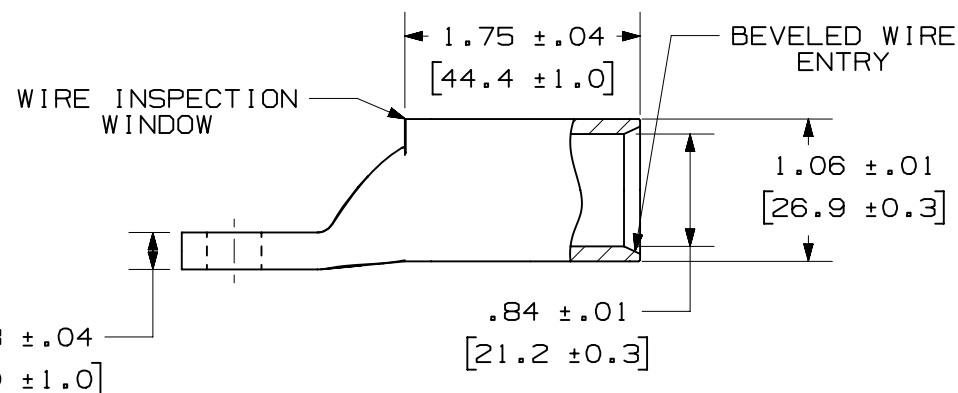



2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MATERIAL	HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
PLATING	ELECTRO-TIN
WIRE SIZE	350 STR/FLEX
WIRE TYPE	STRANDED COPPER: CLASS G, H, I, K, M LOCOMOTIVE
WIRE STRIP LENGTH	1-13/16 IN
STUD SIZE	3/8 IN.
UL LISTED WIRE CONNECTOR	YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
UL TEMPERATURE RATING	90° C
CSA CERTIFIED WIRE CONNECTOR	YES
PANDUIT COLOR CODE ON BARREL	BLUE
PANDUIT DIE INDEX NO. ON BARREL	P76
ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL	(19)

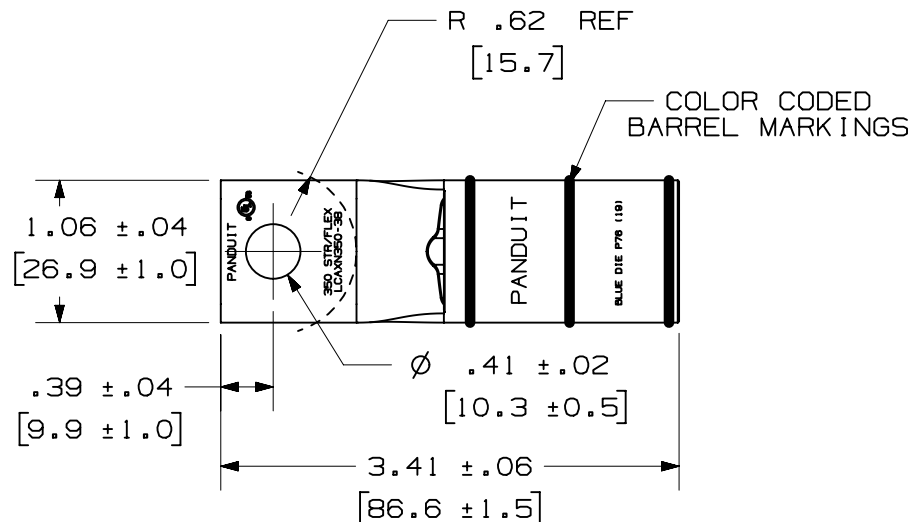

PART NUMBER		LCAXN350-38-6	
TITLE			
COPPER LUG - ONE HOLE, NARROW TONGUE, STANDARD FLEX BARREL			
CUSTOMER DRAWING			
ITEM REVISION NAME		00159NCA/01	
DATASET FILE NAME		00159NCA-DC/01A	
		THIRD ANGLE PROJECTION	
MATERIAL		SEE TABLE	
DRAWING NUMBER		00159NCA-DC	
DRAWN BY	DATE	CHK	SCALE
DRL	11-08	DRL	NONE
SHEET 1 OF 1			SIZE
			A

01A	4-9-24	JHNU	JHNU	MRWA	C. REVISED TONGUE THICKNESS: .28 WAS .26 B. REVISED DRAWING NUMBER: 00159NCA-DC WAS LCAXN350-38-6 A. CONVERTED TO NX	003577
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2

1

B

A

A-SIZE CUSTOMER