


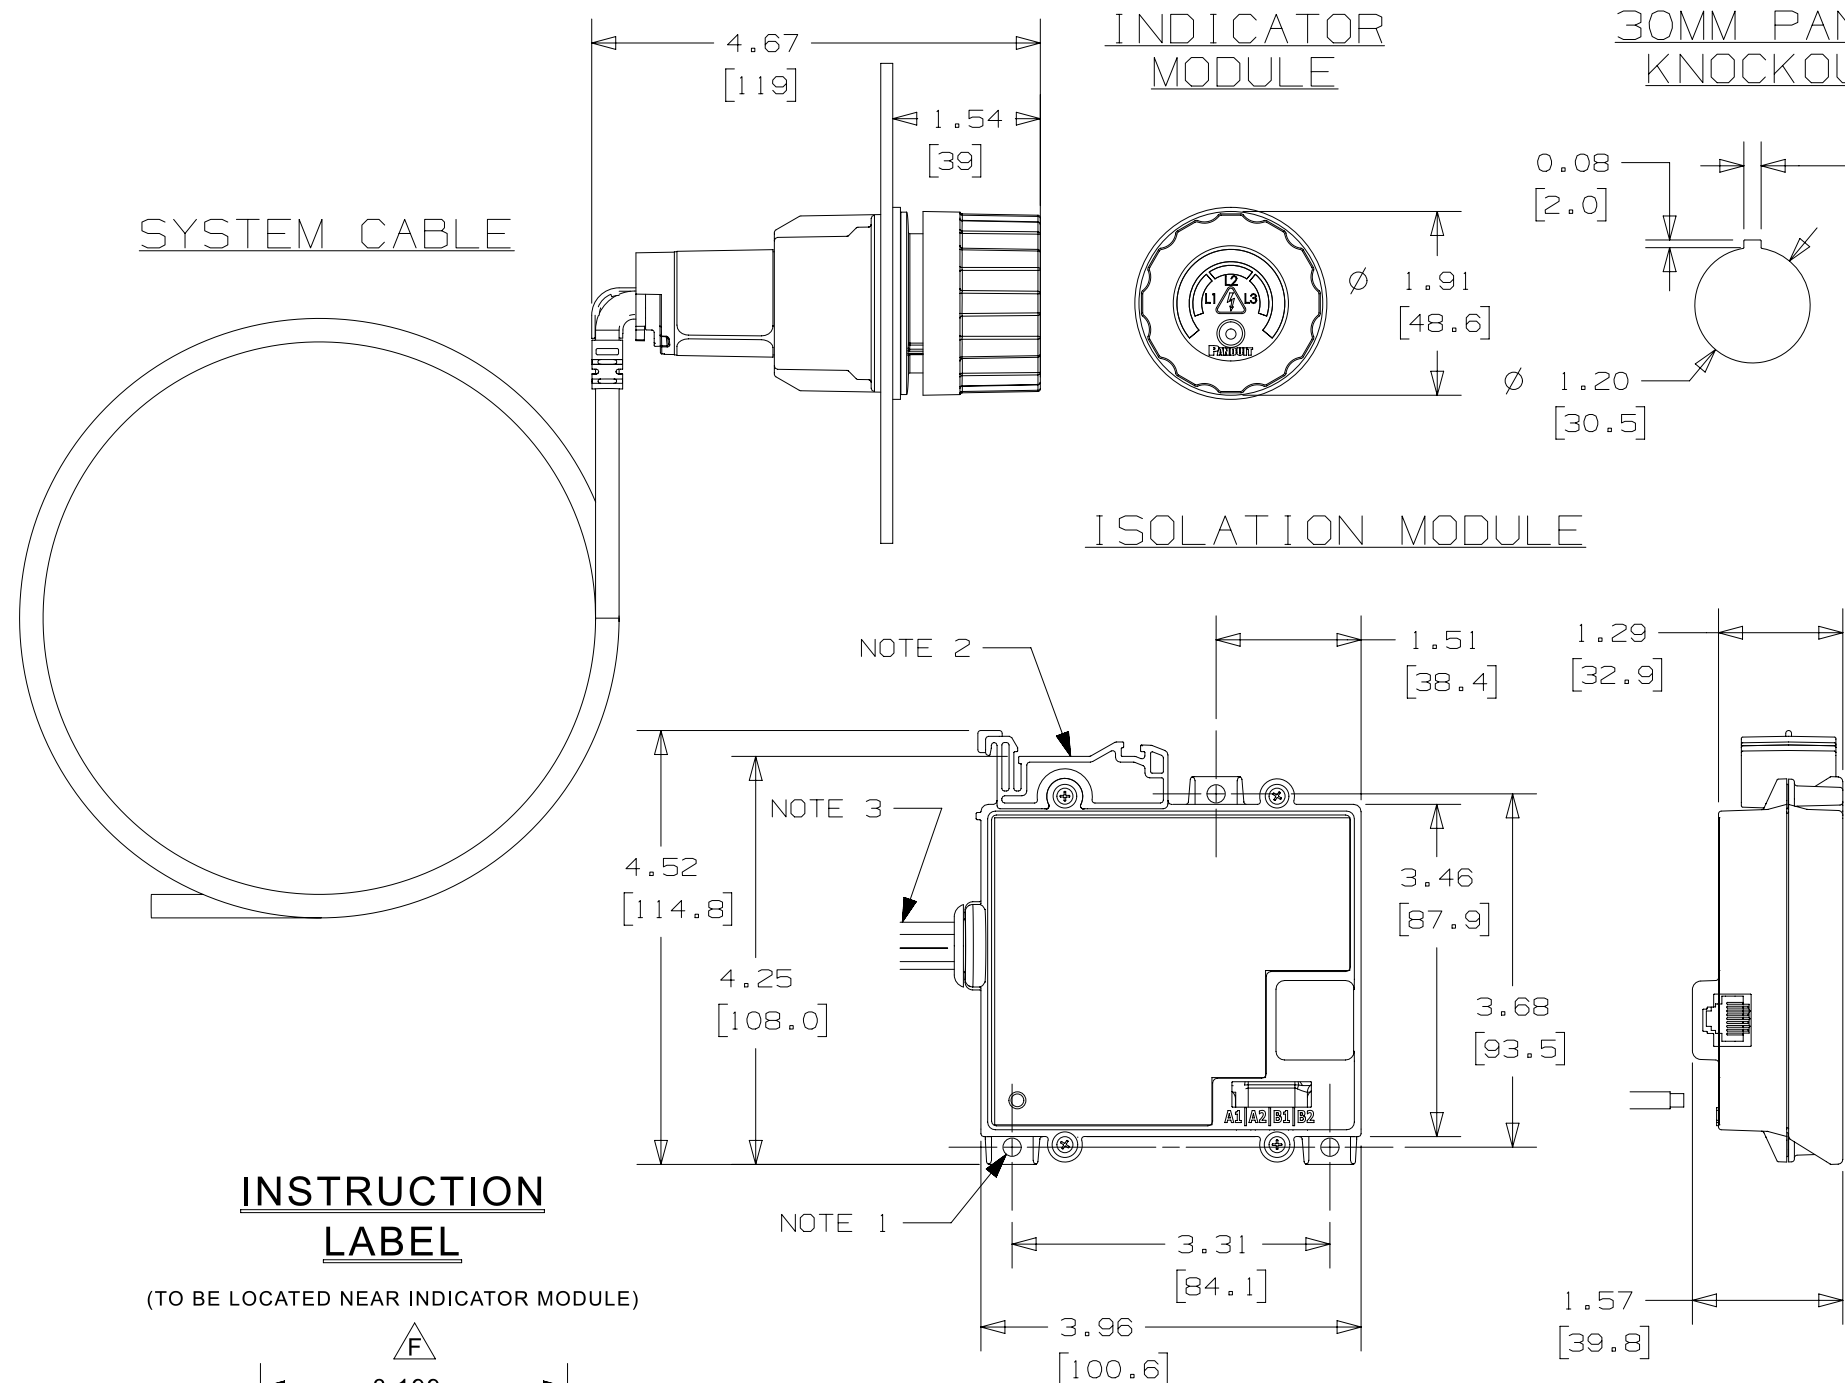

NOTES, UNLESS OTHERWISE SPECIFIED

1. Mount for #8 Pan Head Screw. 3 Places.
2. DIN Rail Mounting Feature
3. Lead Wires. QTY 8 - 14 AWG (2.08mm²)

READ PRODUCT INSTRUCTIONS BEFORE USING

PANDUIT PART NUMBER:
VS-AVT-C08-L10 (8FT SYSTEM CABLE, 10 FT LEADS)
VS-AVT-C02-L03 (2FT SYSTEM CABLE, 3 FT LEADS)
VS-AVT-C08-L10U (8 FT SYSTEM CABLE,10 FT LEADS,UNFILTERED INDICATOR)
VS-AVT-C02-L03U (2 FT SYSTEM CABLE, 3 FT LEADS,UNFILTERED INDICATOR)

GENERAL SPECIFICATIONS

Electrical System:	For use in 1, 2, or 3-phase AC systems
Voltage Detection Range:	Up to 600V AC (50/60Hz), 600VDC
Absence of Voltage Threshold:	3V
Overvoltage Category:	III (600V)
Degree of Protection:	NEMA 1, 12, 4, 4X, 13 / IP66, IP67, IP69*


Environmental	
Operating Temperature:	-25°C to +60°C (-13°F to +140°F)
Storage Temperature:	-45°C to +85°C (-49°F to +185°F)
Humidity:	5 to 95% non-condensing
Pollution Degree:	3

Battery
Voltage: Industrial 3.6V Lithium AA
Serviceability: User Replaceable.

Weight
Units with 2 ft system cables and 3 ft leads weigh 1202 gms / 2.65 lbs
Units with 8 ft system cables and 10 ft leads weigh 1792 gms / 3.95 lbs

*Degree of protection specified is related to Indicator Module only . .

8	11/12/2024	RVU	JOSO	MSAD	F. DIMENSION OF THE INSTRUCTION LABEL, CHANGED FROM 2.81 x 2.52 TO 3.199 x 2.645. E. DELETE PANDUIT PART NUMBER: VS-AVT-C02-L03F AND VS-AVT-C08-L10F. D. CHANGED TITLE FROM "VERISAFE" TO "VERISAFE 600V AVT".	GAECN0725
7	8/19/23	DFA	DBLA	MSAD	C. ADDED UNFILTERED INDICATOR P/Ns, REMOVED ASIA AND EUROPE REFS. B. ADDED IP69 RATING A. -25 WAS 0; -13 WAS 0 (OPERATING TEMPERATURE)	GAECN0689
6	8/13/18	DFA	KJH	MSAD	ADDED EMEA UNITS TO NOTES	GAECN0533
5	5/9/18	DFA	CLW	MSAD	ADDED RoAP P/Ns TO NOTES; MODIFIED WORDING; REMOVED C02-L10 UNIT	GAECN0527
4	10/27/17	DFA	MSAD	JW	CHANGED SYSTEM CABLE LENGTH TO 2 FT FOR VS-AVT-C02-L03	GAECN0516
3	10/19/17	DFA	MSAD	JW	ADDED VS-AVT-C02-L03 TO NOTES	GAECN0516
2	6/7/17	MROB	MSAD	JW	ADDED AUXILIARY INSTRUCTION LABEL	GAECN0417
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE		VERISAFE 600V AVT ABSENCE OF VOLTAGE TESTER CUSTOMER DRAWING	
ITEM REVISION NAME		14I216AS/18	PANDUIT
DATASET FILE NAME		14I216AS_DC/18B	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [.25] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 ° 		MATERIAL : N/A	
DRAWING NUMBER:		14I216AS_DC	
DRAWN BY	DATE	CHK	SCALE
MROB	4/3/17	MSAD	NTS
SHT 1 OF 1			SIZE B