
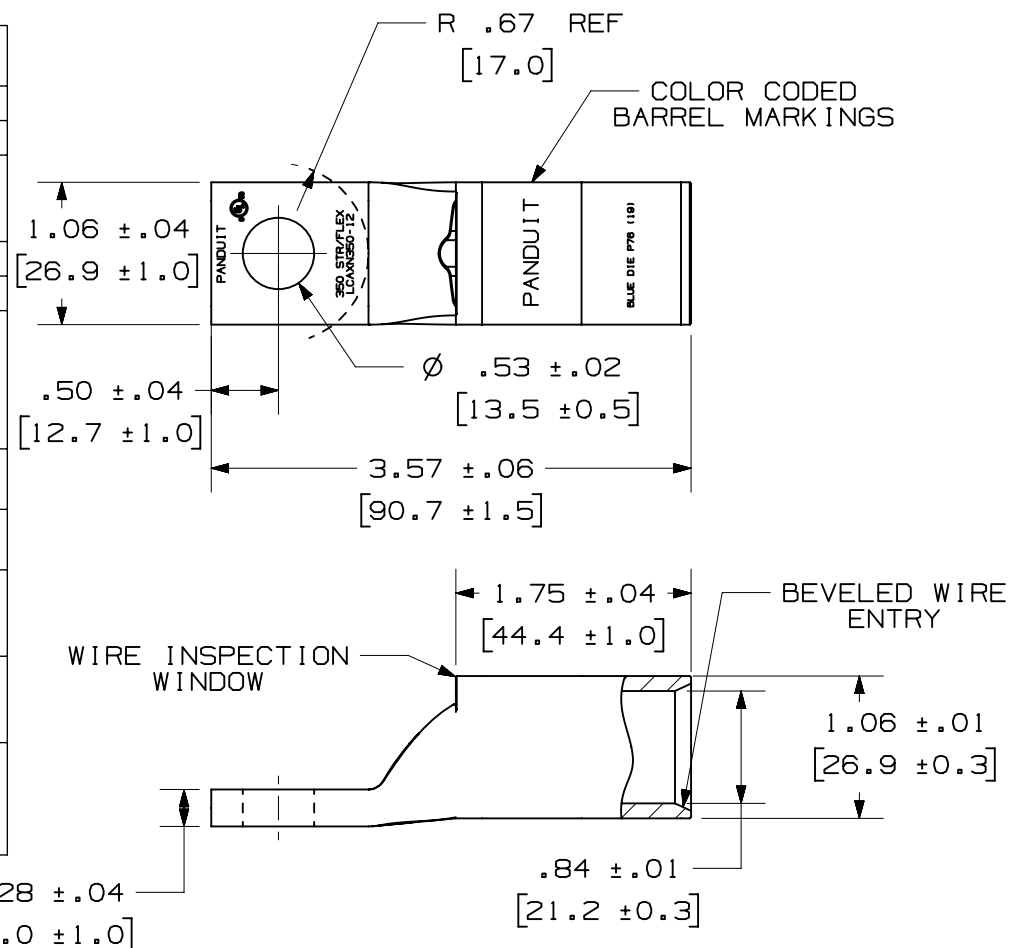


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MATERIAL	HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
PLATING	ELECTRO-TIN
WIRE SIZE	350 STR/FLEX
WIRE TYPE	STRANDED COPPER: CLASS G, H, I, K, M, LOCOMOTIVE
WIRE STRIP LENGTH	1-13/16 IN
STUD SIZE	1/2 IN.
UL LISTED WIRE CONNECTOR	YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
UL TEMPERATURE RATING	90° C
CSA CERTIFIED WIRE CONNECTOR	YES
PANDUIT COLOR CODE ON BARREL	BLUE
PANDUIT DIE INDEX NO. ON BARREL	P76
ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL	(19)



PART NUMBER		LCAXN350-12-6			
TITLE					
COPPER LUG - ONE HOLE, NARROW TONGUE, STANDARD BARREL					
CUSTOMER DRAWING					
ITEM REVISION NAME		00159NCB/00			
DATASET FILE NAME		00159NCB-DC/00A			
		THIRD ANGLE PROJECTION			
MATERIAL				DRAWING NUMBER	
SEE TABLE				00159NCB-DC	
DRAWN BY	DATE	CHK	SCALE	SIZE	
DRL	11-08	DRL	NONE	SHEET 1 OF 1	A

2

1

B

A

B

A

A-SIZE CUSTOMER