
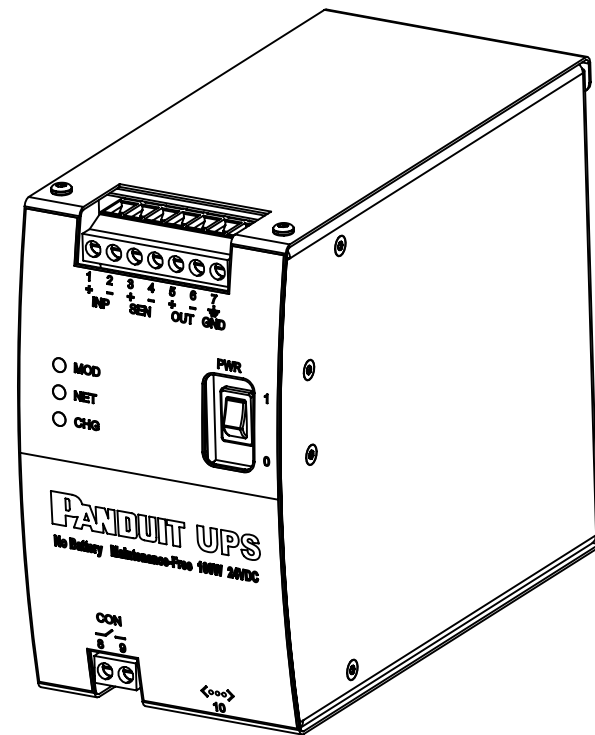


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

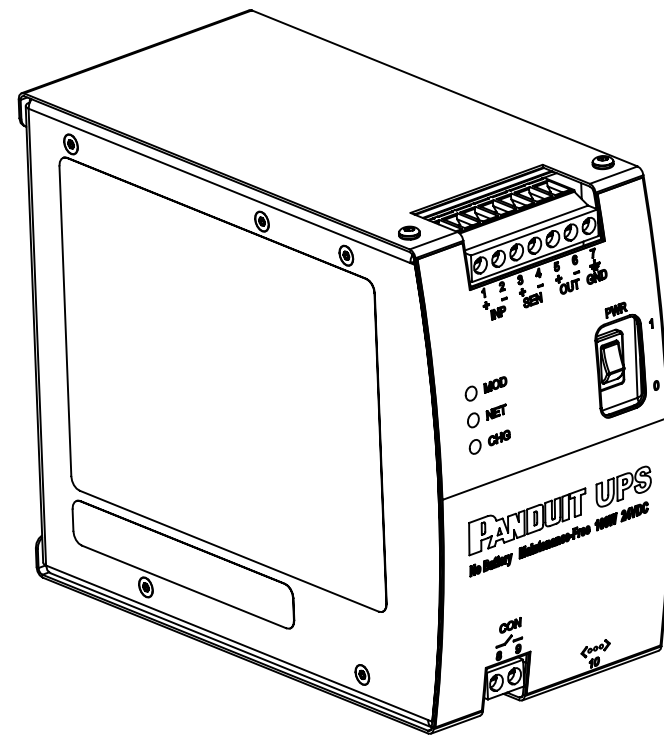

NOTES: UNLESS OTHERWISE SPECIFIED:

PANDUIT PART NO.: UPS00100DC
100W Uninterruptible Power Supply

ACCESSORIES

Load Sense Module Panduit part number UPS003LSM

UPS GENERAL SPECIFICATIONS

Input Power

Voltage: 24.0 to 28.0 VDC

Power: Fast Charge: 50 W Max.

Medium Change: 35 W Max.

Slow Charge: 24 W Max.

Current: 6.5 A Max.

Protection: Over-voltage shut down at 32 VDC.

Maximum over-voltage is: +50 VDC at 25° C ambient

Reverse voltage maximum is: -50 VDC at 25°C ambient

Output Power

Voltage: Input present: 500 mV drop at 100 W load

Input not present: 21.0 to 23.0 VDC

Current: 4.55 A @ 22 VDC

Short circuit rating: 6.1 A to 7.7 A

Environmental

Operating Temperature: -40°C to +60°C.

Storage (non-operational) Temperature: -40° C to +70° C.




Humidity: 0 to 95% RH, noncondensing

Operational Vibration: 2G at 10 to 500 Hz

Operational Shock: 20G (11ms 3 bumps / direction,
18 bumps in total)


Weight: 2177 gr. / 4.8 lbs.

Numbers shown in parentheses [] are inches.

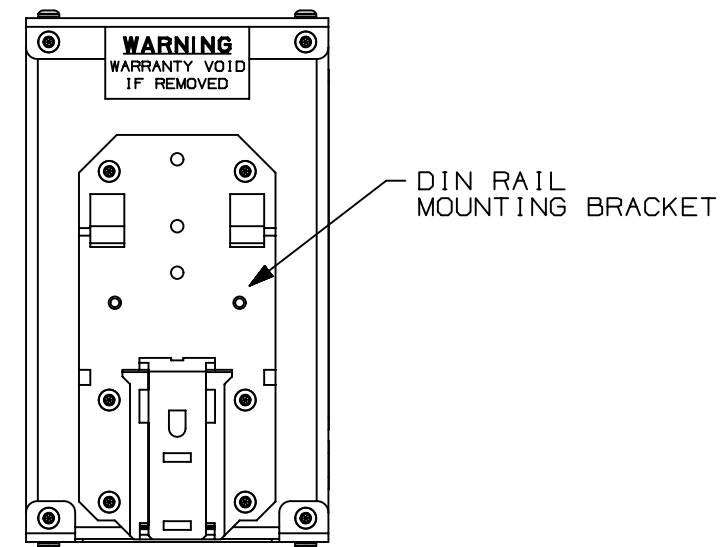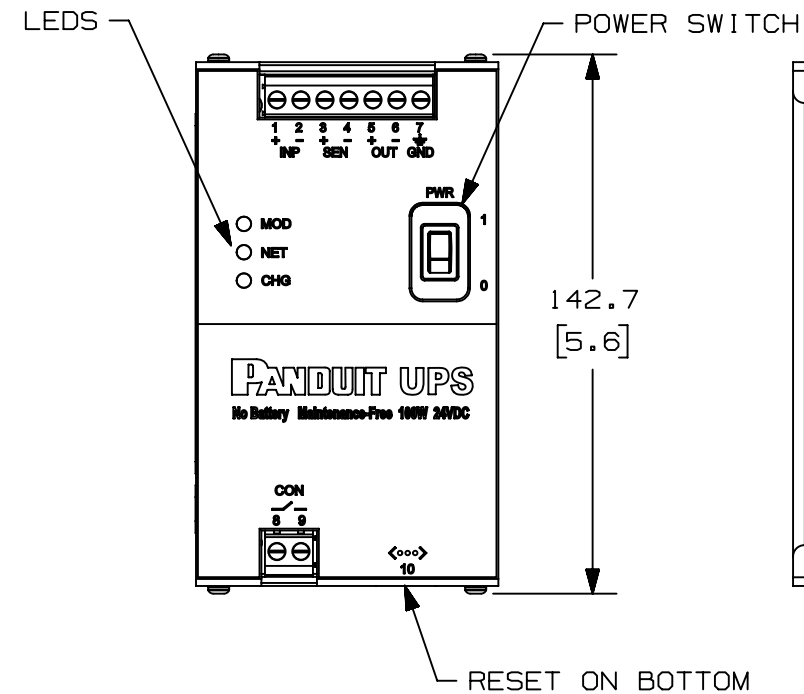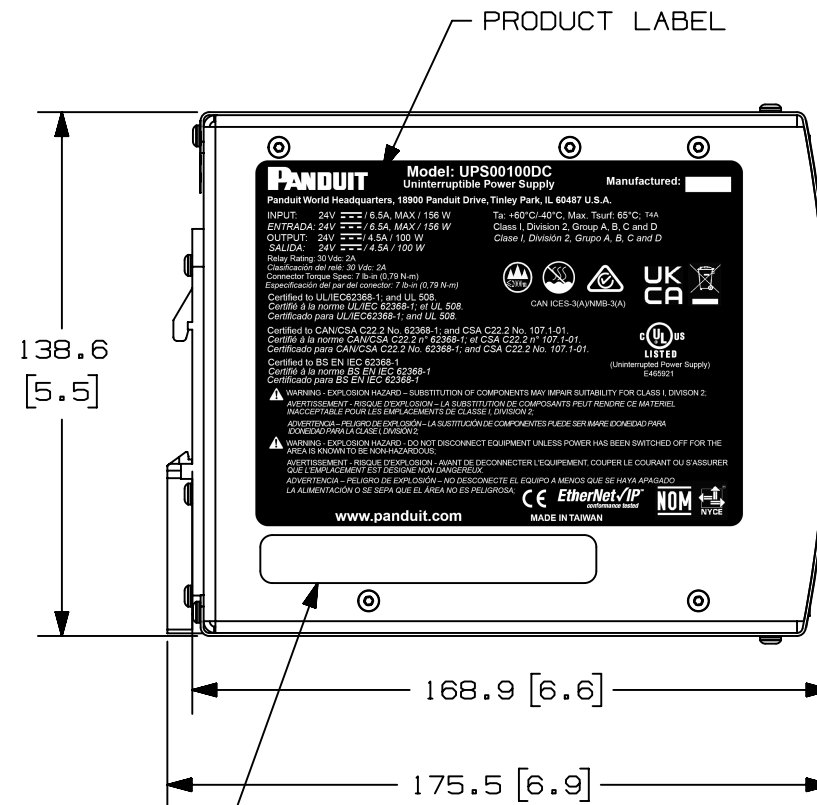

MAC ADDRESS LABEL

06A	5/12/22	JBO	DAJP	BETL	C. REVISED LABEL	00074LAA-D
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE				UPS00100DC 100W UNINTERRUPTIBLE POWER SUPPLY CUSTOMER DRAWING				
ITEM REVISION NAME								
00074LAA/06								
DATASET FILE NAME				MATERIAL: N/A				
00074LAA_DC/06A								
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN] .X ± - .XXX ± - .XX ± - ANGLES ± -  THIRD ANGLE PROJECTION				DRAWING NUMBER: 00074LAA_DC				
DRAWN BY		DATE		CHK	SCALE		SIZE	
JB0		6/21/17		DAJP	NONE		SHT 1 OF 1	
							B	