


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

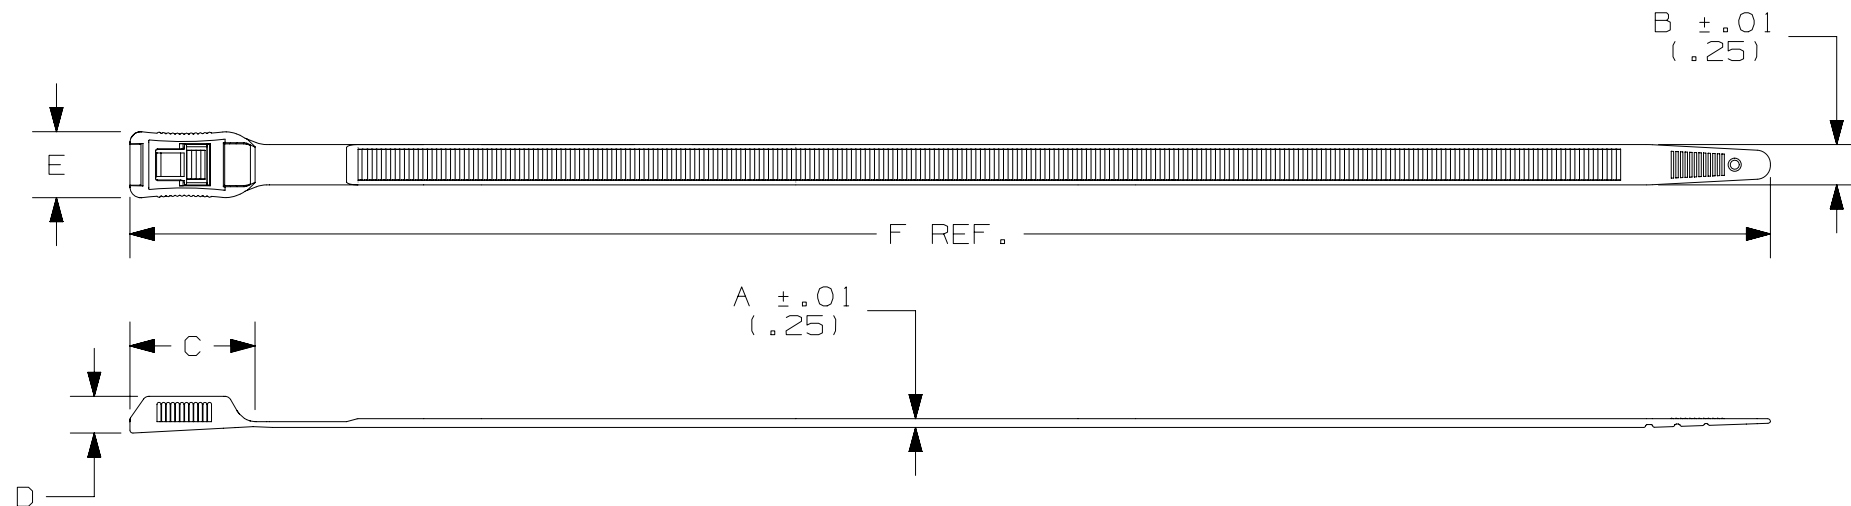

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE* lbs. (N)	CROSS SECTION	WEIGHT 100 pcs lbs (g)
	MIN. in (mm)	MAX. in (mm)									
HV965	.39 (10)	2.6 (65)	.076 (1.9)	.350 (8.9)	1.093 (27.7)	.318 (8.0)	.571 (14.5)	10.43 (265)	160 (710)	LIGHT HEAVY	1.02 (462)
HV9100	.39 (10)	3.9 (100)	.076 (1.9)	.350 (8.9)	1.093 (27.7)	.318 (8.0)	.571 (14.5)	14.43 (367)	160 (710)	LIGHT HEAVY	1.36 (617)
HV9150	.39 (10)	5.9 (150)	.076 (1.9)	.350 (8.9)	1.093 (27.7)	.318 (8.0)	.571 (14.5)	20.65 (525)	160 (710)	LIGHT HEAVY	1.84 (845)
HV9250	.39 (10)	9.8 (250)	.076 (1.9)	.350 (8.9)	1.093 (27.7)	.318 (8.0)	.571 (14.5)	33.12 (841)	160 (710)	LIGHT HEAVY	2.85 (1295)

* PER SAE AS23190

CONFORMS TO EN50146

-MINIMUM INSTALLATION TEMP: -25°C

-MAXIMUM APPLICATION TEMP: 85°C

-MINIMUM APPLICATION TEMP: -60°C

-MINIMUM LOOP TENSILE STRENGTH: 710N

-FLAME APPLICATION TIME: 10s

DIMENSIONS IN PARENTHESIS ARE IN METRIC

							TITLE				
							HYPER-V IN-LINE TIE				
							CUSTOMER DRAWING				
							ITEM REVISION NAME		10B015RF/00		
							DATASET FILE NAME		10B015RF_DC/00 SS-27504_REV05		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:		
							.x ± .1 .xx ± .02		.xxx ± .02 ANGLES ± 5 °		NYLON 6.6
									THIRD ANGLE PROJECTION		DRAWING NUMBER:
											SS-27504
							DRAWN BY		DATE		SIZE
							MDS		4/07/06		A
							CHK		SCALE		
							FAB		NONE		
									SHT 1 OF 1		
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN					