


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MATERIAL	HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
PLATING	ELECTRO-TIN
WIRE SIZE	750 STR/FLEX
WIRE TYPE	STRANDED COPPER: LOCOMOTIVE
WIRE STRIP LENGTH	3-1/16 IN
STUD SIZE	1/2 IN.
UL LISTED WIRE CONNECTOR	YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
UL TEMPERATURE RATING	90° C
CSA CERTIFIED WIRE CONNECTOR	N/A
PANDUIT COLOR CODE ON BARREL	YELLOW
PANDUIT DIE INDEX NO. ON BARREL	P115
ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL	(L115)

DIMENSIONS IN BRACKETS ARE MILLIMETERS

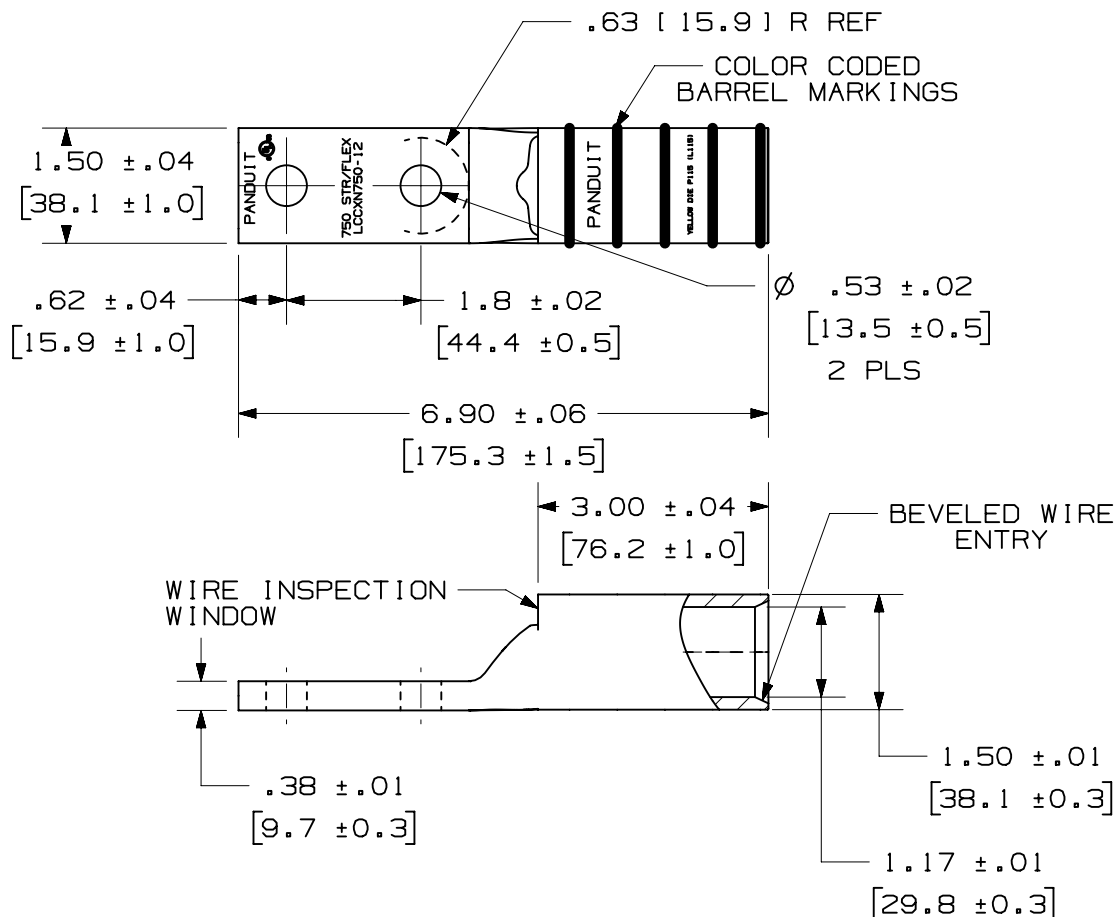

PART NUMBER		LCCXN750-12-3	
TITLE		NARROW TONGUE LUG - 750 kcmil	
CUSTOMER DRAWING			
ITEM REVISION NAME		09J003CD/01	
DATASET FILE NAME		09J003CD-DC/01A	
THIRD ANGLE PROJECTION		PANDUIT	
MATERIAL		SEE TABLE	
DRAWING NUMBER		09J003CD-DC	
DRAWN BY	DATE	CHK	SCALE
JHNU	8-15	RGB	NONE
SHEET 1 OF 1			A

01A	12-15-23	JHNU	JHNU	MRWA	C. REVISED DRAWING NUMBER: 09J003DC-DC WAS LCCXN750-12-CUST B. REVISED TONGUE THICKNESS: .38 WAS .32 A. CONVERTED TO NX	000163
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2

1