





2

1


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:


1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE USE WITH THIS PRODUCT.
2. PRODUCT IS REMOVED THE APPROPRIATE RJ45 FEMALE PORT USING THE SINGLE KEY MASTER KEY (PANDUIT P.N.: SKUMKEY).
3. SEE INSTALLATION INSTRUCTION FOR PROPER USE OF PRODUCT.
4. PARTS INCLUDES (DESCRIPTION: MATERIAL/COLOR):
 - 4A. RJ45 EXTERNAL BODY W/ LOCKING CLIP: POLYCARBONATE (PC), FLAME RATING: UL94 V-0/RED.
 - 4B. INTERNAL BODY W/ UNIQUE FEMALE KEYED PATTERN: POLYCARBONATE (PC), FLAME RATING: UL94 V-0/RED.
5. PRODUCT IS DESIGNED FOR INDOOR USE ONLY.
6. OPERATING TEMPERATURE AND HUMIDITY RANGE:
 - 6A. TEMPERATURE RANGE: -4°F (-20°C) TO +140°F (+60°C)
 - 6B. HUMIDITY RANGE: 10-70% NON-CONDENSING RELATIVE HUMIDITY.
7. STORAGE CONDITIONS:
 - 7A. TEMPERATURE RANGE: -4°F (-20°C) TO +176°F (+80°).
 - 7B. HUMIDITY RANGE: 10-80% NON-CONDENSING RELATIVE HUMIDITY.
8. WEIGHT: 0.01 LBS/ (1) PCS (6.87 grams/ (10) PCS).
9. DIMENSIONS IN [] ARE METRIC.
10. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIALS RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

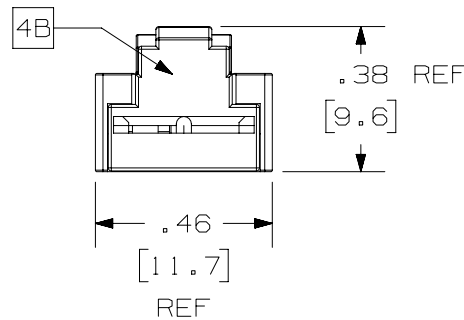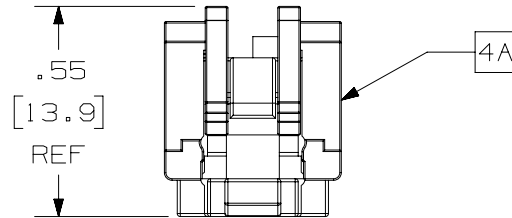

(PRODUCT SHOWN IN THE OPEN POSITION)



SCALE 2:1

PART NUMBER		SKRJ45RD-X	
TITLE		SINGLE KEY RJ45 BLOCKOUT DEVICE	
CUSTOMER DRAWING			
ITEM REVISION NAME	00402NAD/01		
DATASET FILE NAME	00402NAD_DC/01A		
 THIRD ANGLE PROJECTION			
MATERIAL		DRAWING NUMBER	
SEE NOTES		00402NAD-DC	
DRAWN BY	DATE	CHK	SCALE
MDJR	04-25-19	DCS	2:1
SHEET 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	01-29-26	MDJR	ROJC	JESA	UPDATED TO MATCH CONTROL DRAWING REVISION	029625/00
00B	1-19-26	BJN	JESA	MMR	DRAWING UPDATED	M09001BB
00A	04-25-19	MDJR	DCS	MMR	RELEASED TO PRODUCTION	00402NAD-DC

2

1