


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


20A, SINGLE-POLE
ELECTRO MECHANICAL
SWITCH / BREAKER (6)PL




REAR VIEW



TOP VIEW

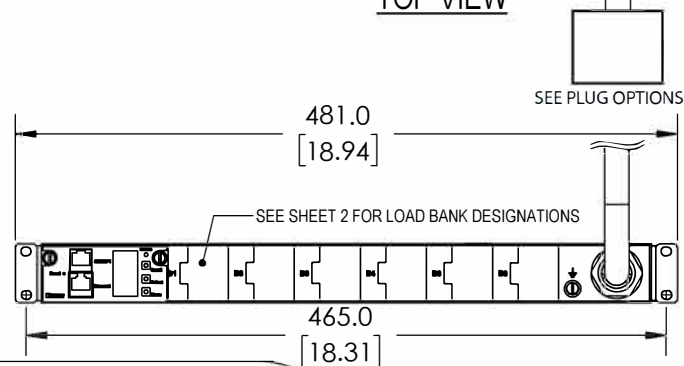

FRONT VIEW

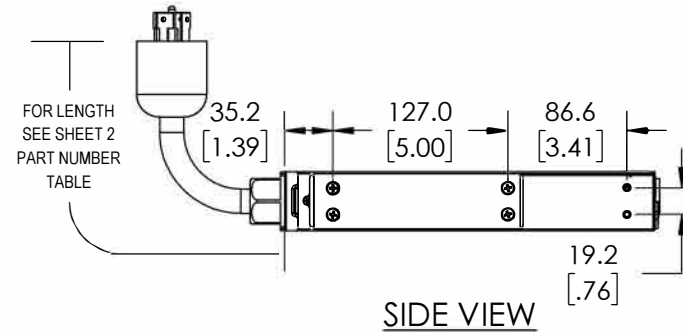

SIDE VIEW

SPECIFICATION:

1. STANDARD
UNIT TYPE: MONITORED INPUT
ORIENTATION: HORIZONTAL, 1U
OUTLET QTY & TYPE: SEE SHEET 2 FOR CONFIGURATIONS
INPUT VOLTAGE: 200-240/346-415VAC
INPUT CURRENT: 30A (24A DERATED)
BREAKER QTY & TYPE: (6) 20A, SINGLE-POLE
INPUT PHASE: THREE-PHASE WYE
RATED POWER: 17.3 kVA
INPUT PLUG: SEE SHEET 2 FOR CONFIGURATIONS
INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE

REGULATORY STANDARD: RoHS COMPLIANT

2. ADDITIONAL:
CIRCUIT BREAKERS RATED AT 10kAIC

3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "FRONT FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P06D##M - XYZ

XX: FINISHED GOOD COLOR
BL = BLACK
RD = RED
WH = WHITE
YL = YELLOW
BU = BLUE
GN = GREEN

Y: INPUT FEED TYPE
6 = FRONT FED

Z: INPUT CORD LENGTH
A = 1 METER
B = 2 METER
C = 3 METER

FOUR CHARACTER SUFFIX FOR ALTERNATE
PRODUCT CONFIGURATIONS

WE ASK THAT YOU CHECK FULLY THE
DIMENSIONS, NOTES, AND SIGNTHE CLIENT
SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT
SIGNED APPROVAL. PLEASE DO NOT DELAY
IN RETURNING PROOF AS IT WILL AFFECT
DELIVERY.

SIGN
DATE
PRINT

TITLE INTELLIGENT SERIES PDU P06D##M-XXYZ CUSTOMER DRAWING	
ITEM REVISION NAME	
DATESET FILE NAME	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±3.0	
MATERIAL	
DRAWING NUMBER P06D_DC	
BY WAC	
DATE 03/15/19	
CHK -	
SCALE NTS	
SHEET 1 OF 2	
SIZE B	

01A	3/21/2019	WAC	DACU	JAWI	RELEASED TO PRODUCTION	P06D
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN




IEC 60309, 4P 5W, 6H
IP67 (WATERTIGHT)
30A, 346-415V MAX
RATED INPUT
24A DERATED



IEC 60309, 4P 5W, 6H
IP44 (SPLASHPROOF)
30A, 346-415V MAX
RATED INPUT
24A DERATED



NEMA L22-30P, 4P 5W
30A, 277-480V MAX
RATED INPUT
24A DERATED



IEC 60320/C19
16A, 250V MAX
RATED OUTPUT

PLUG/ RECEPTACLE BLOCK

D101 00056 / 17

