




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	INPUT PLUG CONFIGURATION	RECEPTACLE CONFIGURATION	COLOR	INPUT CORD LENGTH	WEIGHT
P36D02M	VERTICAL, (24)C13, (12)C19, MONITORED INPUT, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	L22-30P 30A 4P, 5W	(24) C13, (12) C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'(+10"/-5")	13.7KG
P36D01M	VERTICAL, (24)C13, (12)C19, MONITORED INPUT, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP67 (WATERTIGHT)	(24) C13, (12) C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'(+10"/-5")	13.7KG
P36D03M	VERTICAL, (24)C13, (12)C19, MONITORED INPUT, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP44 (SPASHPROOF)	(24) C13, (12) C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'(+10"/-5")	13.7KG

(24)C13, (12)C19

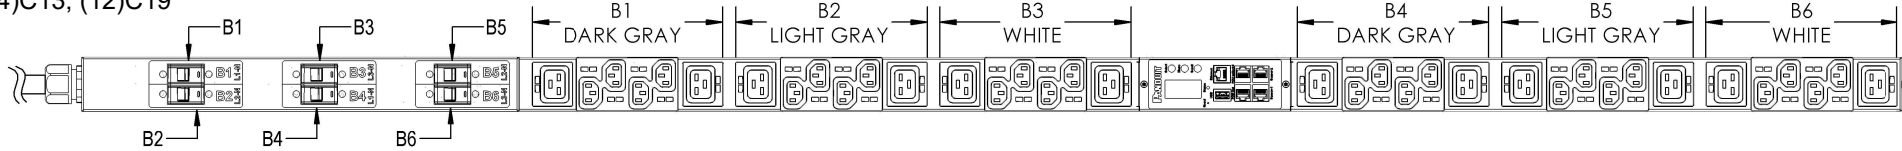

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN	
DATE		DATE	
PRINT		PRINT	
TITLE			
INTELLIGENT SERIES PDU			
P36D##M-XXYZ			
CUSTOMER DRAWING			
ITEM REVISION NAME		PANDUIT	
DATASET FILE NAME		MATERIAL:	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		DRAWING NUMBER: P36D_DC	
Tolerance (mm)		Tolerance (mm)	
0<L<50		0<L<50	
50<L<250		50<L<250	
250<L<500		250<L<500	
500<L<1000		500<L<1000	
1000<L<2000		1000<L<2000	
THIRD ANGLE PROJECTION		THIRD ANGLE PROJECTION	
BY WAC		DATE 03/15/2019	
CHK -		SCALE NTS	
SHEET 2 OF 2		SIZE B	

