

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36E##M - XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:

MONITORED SWITCHED
VERTICAL, 0U FULL, WIDE
SEE SHEET 2 FOR CONFIGURATIONS
200-240/346-415VAC
30A (24A DERATED)
(6) 20A, SINGLE POLE
THREE-PHASE WYE
17.3 kVA
SEE SHEET 2 FOR CONFIGURATIONS
SEE SHEET 2 FOR PART NUMBER
TABLE

REGULATORY STANDARD: RoHS COMPLIANT

2. ADDITIONAL:
- CIRCUIT BREAKERS RATED AT 10kAIC

3. ACCESSORIES:
- (1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P36E##M - XXYZ**

XX: FINISHED GOOD COLOR
BL = BLACK YL = YELLOW
RD = RED BU = BLUE
WH = WHITE GN = GREEN

Y: INPUT FEED TYPE
1 = TOP-END FED
2 = BOTTOM-END FED

Z: INPUT CORD LENGTH
A = 1 METER
B = 2 METER
C = 3 METER

FOUR CHARACTER SUFFIX FOR ALTERNATE
PRODUCT CONFIGURATIONS

WE ASK THAT YOU CHECK FULLY THE
DIMENSIONS, NOTES, AND SIGN THE CLIENT
SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT
SIGNED APPROVAL. PLEASE DO NOT DELAY
IN RETURNING PROOF AS IT WILL AFFECT
DELIVERY.

SIGN

DATE

PRINT

TITLE

INTELLIGENT SERIES PDU
P36E##M-XXYZ

CUSTOMER DRAWING

ITEM REVISION NAME

DATASET FILE NAME

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: mm [IN]

Tolerance (mm)
C<L≤50 ±0.5
50<L≤250 ±1.0
250<L≤500 ±1.5
500<L≤1000 ±2.5
1000<L≤2000 ±4.0



THIRD ANGLE
PROJECTION

MATERIAL:

DRAWING NUMBER:

P36E_DC

BY

DATE

CHK

SCALE

WAC

02/28/2019






—

NTS

SHEET 1 OF 2

SIZE


B

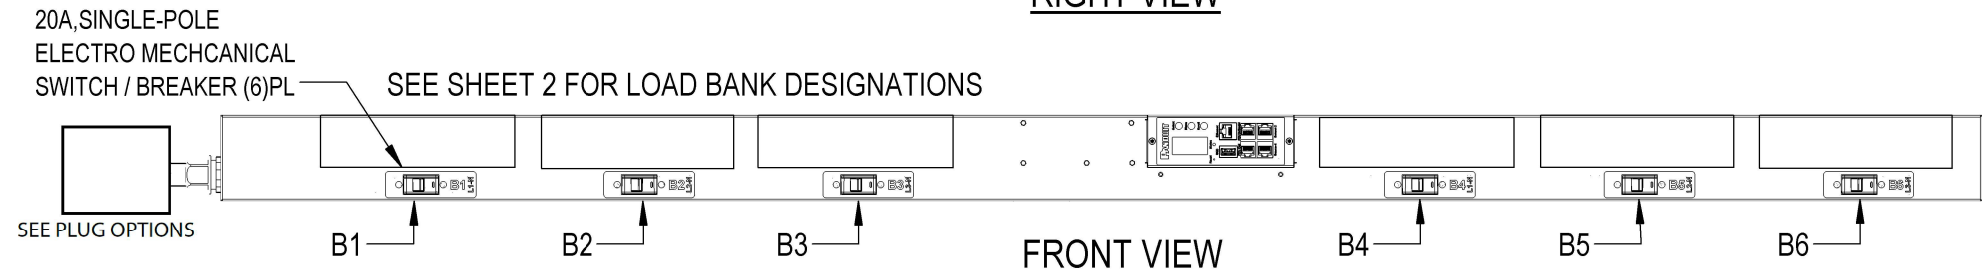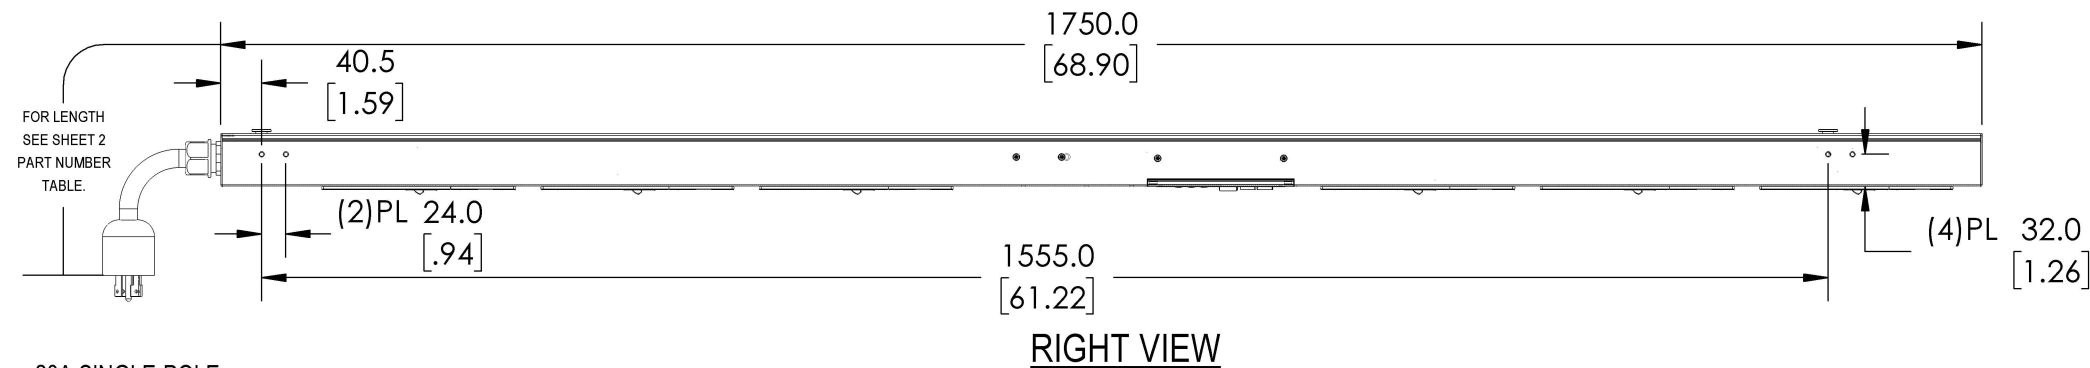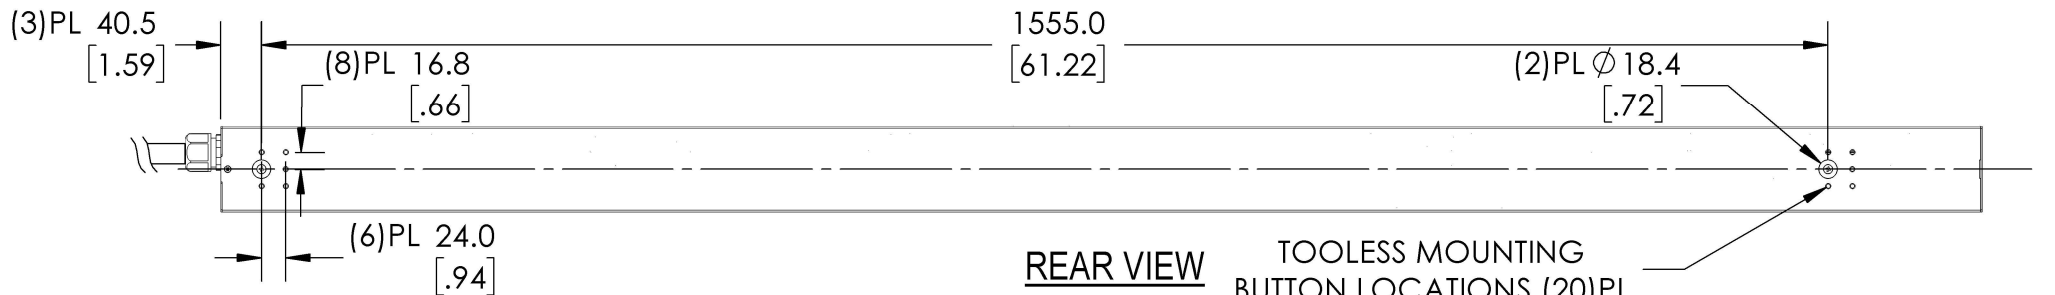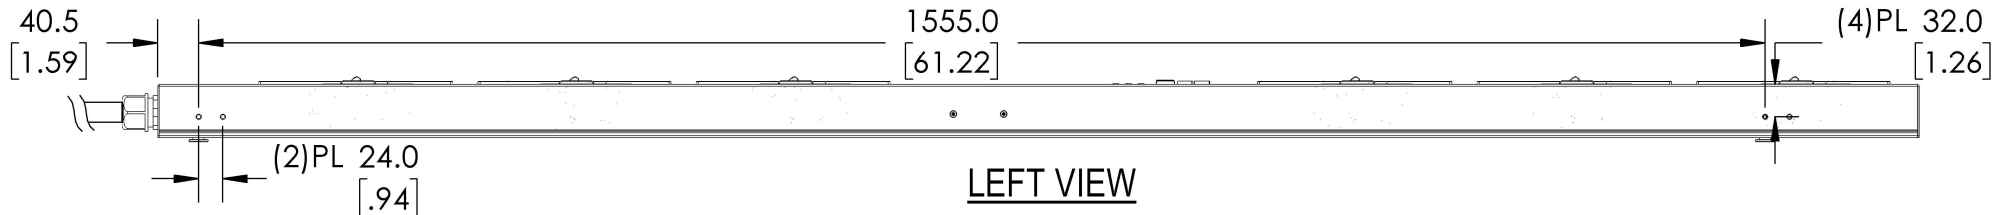


PLUG/ RECEPTACLE BLOCK



IEC 60309, 4P 5W, 6H
IP67 (WATERTIGHT)
30A, 346-415V MAX
RATED INPUT
24A DERATED



IEC 60309, 4P 5W, 6H
IP44 (SPASHPROOF)
30A, 346-415V MAX
RATED INPUT
24A DERATED



NEMA L22-30P, 4P 5W
30A, 277-480V MAX
RATED INPUT
24A DERATED



IEC 60320/C19
16A, 250V MAX
RATED OUTPUT



IEC 60320/C13
10A, 250V MAX
RATED OUTPUT

01A	03/07/2019	WAC	DACU	JAWI	RELEASED TO PRODUCTION	P36E
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

BY

DATE

CHK

SCALE

WAC

02/28/2019

—

NTS

SHEET 1 OF 2

SIZE

B

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	INPUT PLUG CONFIGURATION	RECEPTACLE CONFIGURATION	COLOR	INPUT CORD LENGTH	WEIGHT
P36E06M	VERTICAL, (30)C13, (6)C19, MONITORED SWITCHED, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	L22-30P 30A 4P, 5W	(30)C13, (6)C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.8KG
P36E03M	VERTICAL, (30)C13, (6)C19, MONITORED SWITCHED, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP67 (WATERTIGHT)	(30)C13, (6)C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.8KG
P36E05M	VERTICAL, (30)C13, (6)C19, MONITORED SWITCHED, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP44 (SPLASHPROOF)	(30)C13, (6)C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.8KG
P36E02M	VERTICAL, (24) C13, (12) C19, MONITORED SWITCHED, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	L22-30P 30A 4P, 5W	(24) C13, (12) C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.8KG
P36E01M	VERTICAL, (24) C13, (12) C19, MONITORED SWITCHED, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP67 (WATERTIGHT)	(24) C13, (12) C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.8KG
P36E04M	VERTICAL, (24) C13, (12) C19, MONITORED SWITCHED, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP44 (SPLASHPROOF)	(24) C13, (12) C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	10.8KG

B1

DARK GRAY

B2

LIGHT GRAY

B3

WHITE

(24) C13, (12) C19

B4

DARK GRAY

B5

LIGHT GRAY

B6

WHITE

B1

DARK GRAY

B2

LIGHT GRAY

B3

WHITE

(30) C13, (6) C19

B4

DARK GRAY

B5

LIGHT GRAY

B6

WHITE

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN

DATE

PRINT

TITLE

INTELLIGENT SERIES PDU
P36E##M-XXYZ

CUSTOMER DRAWING

ITEM REVISION NAME

DATASET FILE NAME

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]

THRID ANGLE PROJECTION

Tolerance (mm)

0<L≤50

50<L≤250

250<L≤500

500<L≤1000

1000<L≤2000

±0.5

±1.0

±1.5

±2.5

±4.0

MATERIAL:

DRAWING NUMBER:
P36E_DC

BY
WAC

DATE
02/28/2019

CHK
-

SCALE
NTS

SHEET 2 OF 2

SIZE
B

01A

03/07/2019

WAC

DACU

JAWI

RELEASED TO PRODUCTION

P36E

REV

DATE

BY

CHK

APR

DESCRIPTION

ECN

2

↓

1