


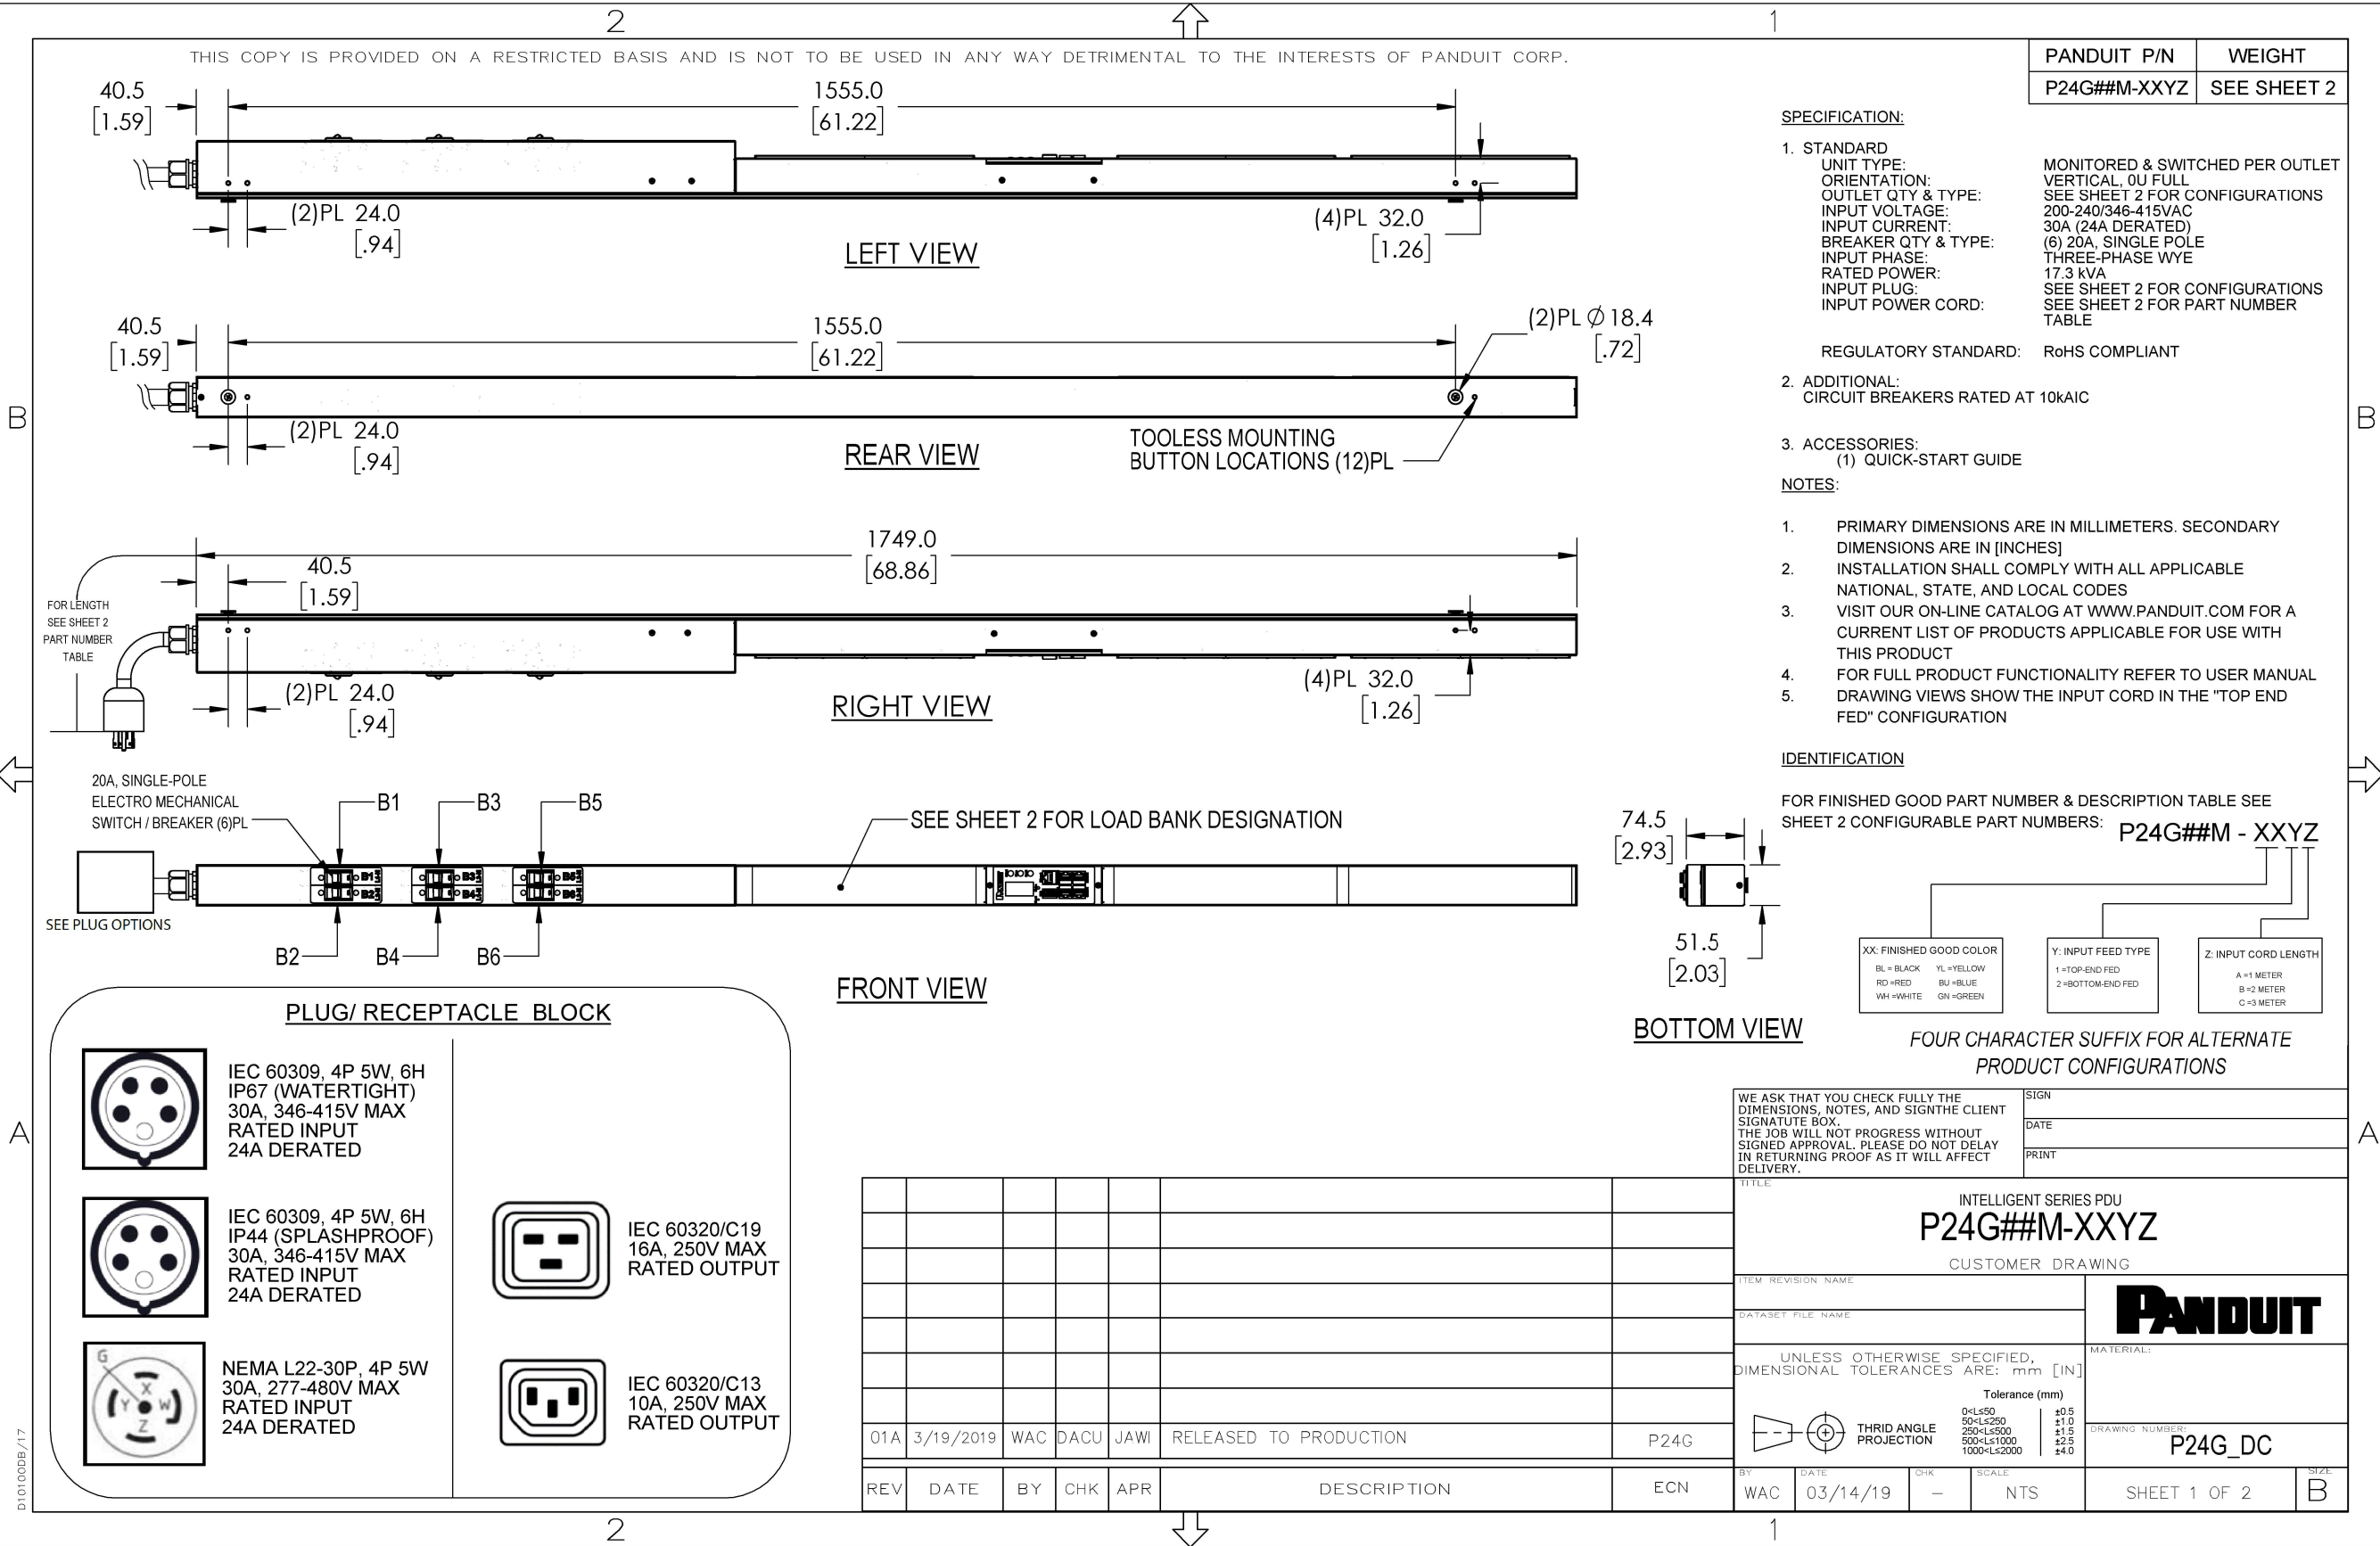

PANDUIT P/N	WEIGHT
P24G##M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD
UNIT TYPE: MONITORED & SWITCHED PER OUTLET
ORIENTATION: VERTICAL, 0U FULL
OUTLET QTY & TYPE: SEE SHEET 2 FOR CONFIGURATIONS
INPUT VOLTAGE: 200-240/346-415VAC
INPUT CURRENT: 30A (24A DERATED)
BREAKER QTY & TYPE: (6) 20A, SINGLE POLE
INPUT PHASE: THREE-PHASE WYE
RATED POWER: 17.3 kVA
INPUT PLUG: SEE SHEET 2 FOR CONFIGURATIONS
INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
- REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL:
CIRCUIT BREAKERS RATED AT 10KAIC
3. ACCESSORIES:
(1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24G##M - XYZ

3

D10100DB/17