


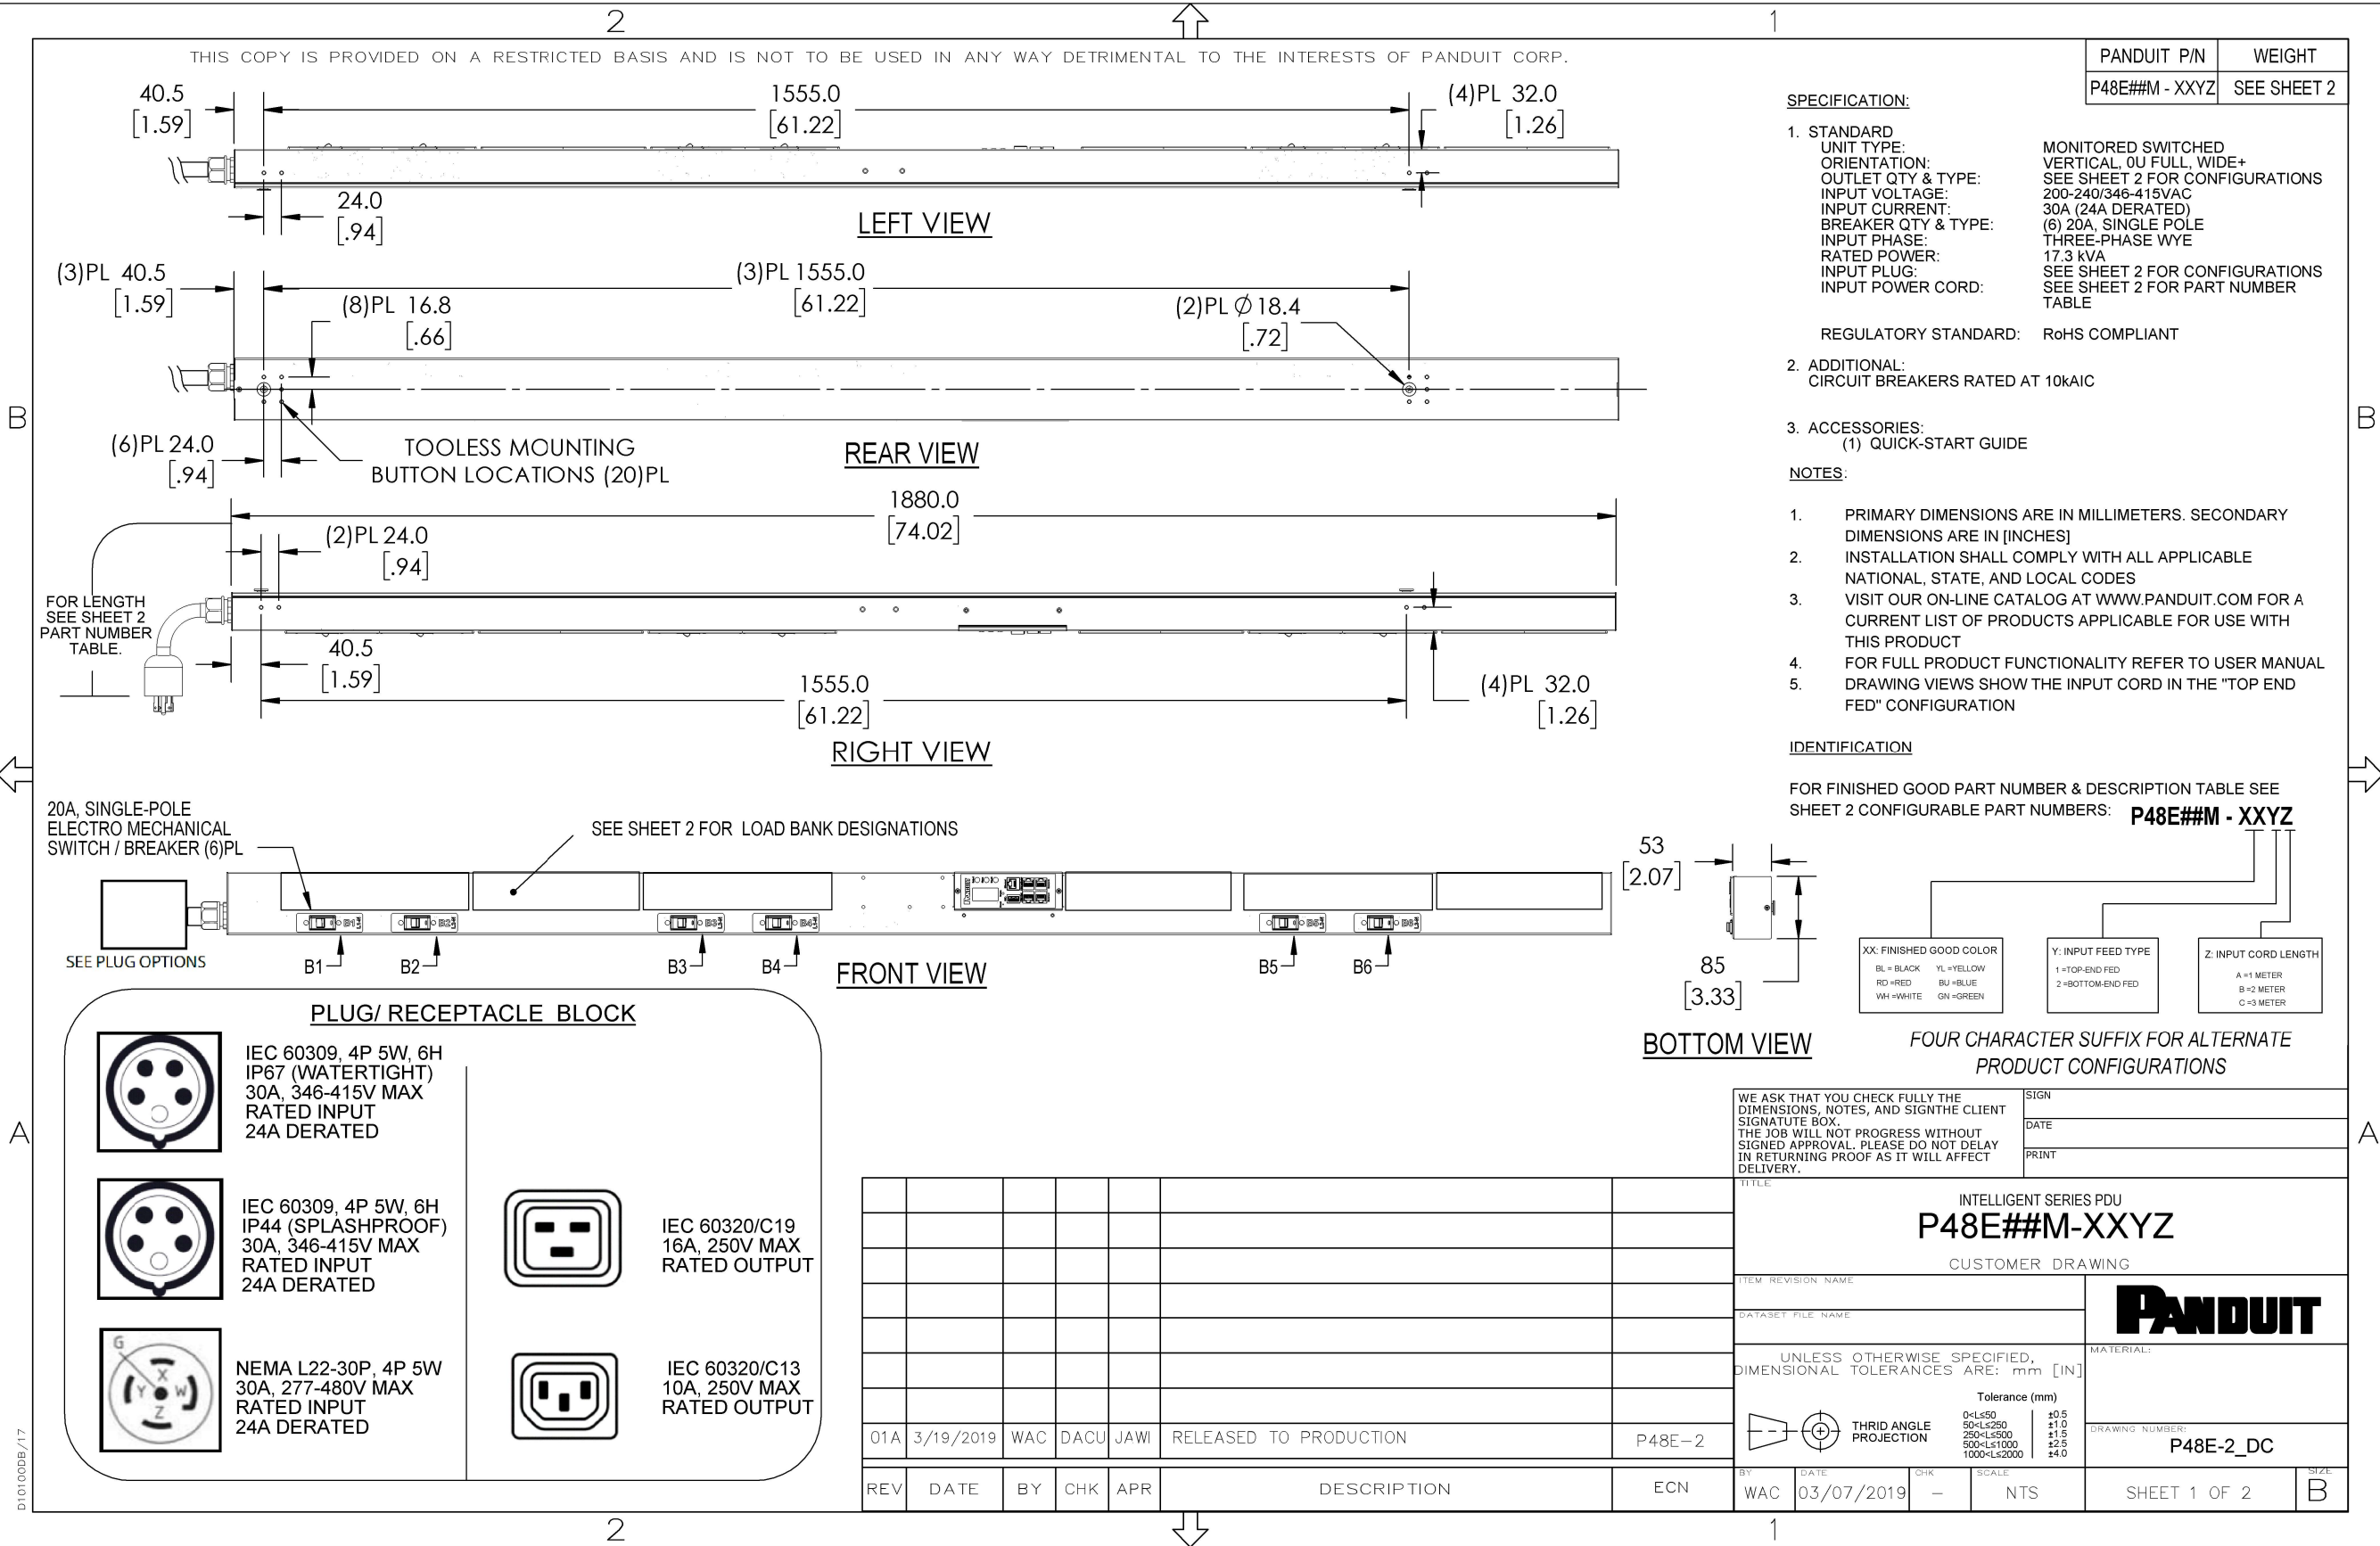

PANDUIT P/N	WEIGHT
P48E##M - XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD UNIT TYPE: MONITORED SWITCHED VERTICAL, 0U FULL, WIDE+
ORIENTATION: SEE SHEET 2 FOR CONFIGURATIONS
OUTLET QTY & TYPE: 200-240/346-415VAC
INPUT VOLTAGE: 30A (24A DERATED)
INPUT CURRENT: (6) 20A, SINGLE POLE
BREAKER QTY & TYPE: THREE-PHASE WYE
INPUT PHASE: 17.3 kVA
RATED POWER: SEE SHEET 2 FOR CONFIGURATIONS
INPUT PLUG: SEE SHEET 2 FOR PART NUMBER
INPUT POWER CORD: TABLE
- REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL: CIRCUIT BREAKERS RATED AT 10KAIC
3. ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P48E##M - XXYZ**

