

B

B

A


A

D1010005/17

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	INPUT PLUG CONFIGURATION	RECEPTACLE CONFIGURATION	COLOR	INPUT CORD LENGTH	WEIGHT
P54B03M	VERTICAL, (48)C13, (6)C19, BASIC, 200-240/346-415V/30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	L22-30P 30A 4P, 5W	(48)C13, (6)C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'["+10"/-5"]	8.0KG
P54B01M	VERTICAL, (48)C13, (6)C19, BASIC, 200-240/346-415V/30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP67 (WATERTIGHT)	(48)C13, (6)C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'["+10"/-5"]	8.0KG
P54B02M	VERTICAL, (48)C13, (6)C19, BASIC, 200-240/346-415V/30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP44 (SPASHPROOF)	(48)C13, (6)C19	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'["+10"/-5"]	8.0KG

(48)C13, (6)C19

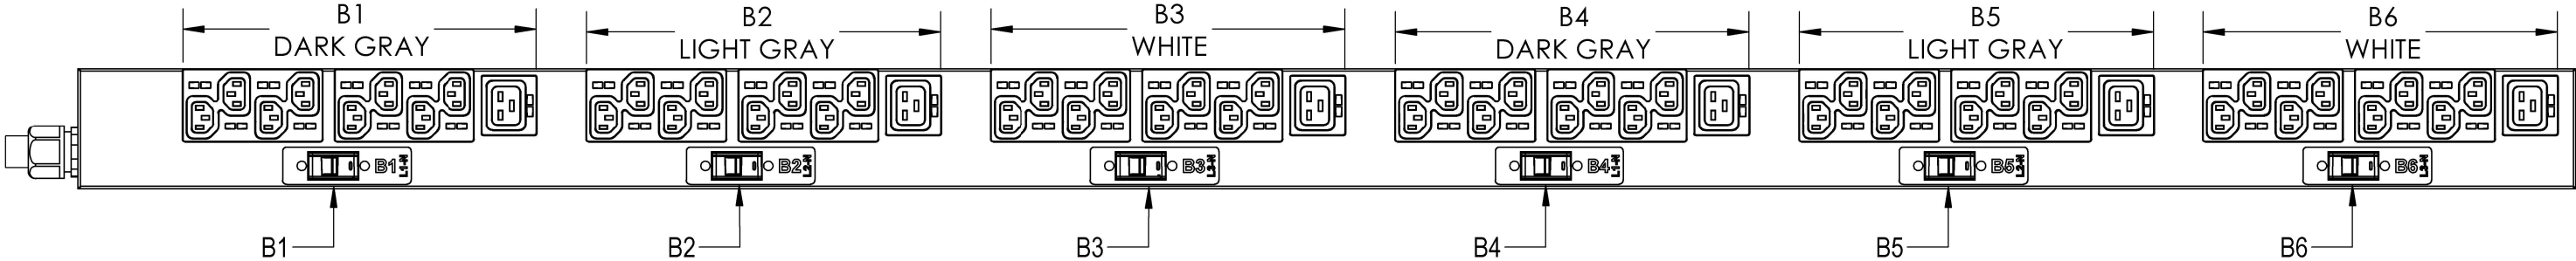

01A	03/07/2019	WAC	DACU	JAWI	RELEASED TO PRODUCTION	P54B
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGNTHE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN

DATE

PRINT

TITLE

INTELLIGENT SERIES PDU
P54B###M-XXYZ

CUSTOMER DRAWING

ITEM REVISION NAME

DATASET FILE NAME

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]

THRID ANGLE PROJECTION

Tolerance (mm)

0<L≤50 ±0.5

50<L≤250 ±1.0

250<L≤500 ±1.5

500<L≤1000 ±2.5

1000<L≤2000 ±4.0

MATERIAL:

DRAWING NUMBER: P54B_DC

BY: WAC

DATE: 03/07/2019

CHK: —

SCALE: NTS

SHEET 2 OF 2

SIZE: B

2

1