

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P48B##M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:

BASIC
VERTICAL, 0U FULL, WIDE
SEE SHEET 2 FOR CONFIGURATIONS
200-240/346-415VAC
30A (24A DERATED)
(6) 20A, SINGLE POLE
THREE-PHASE WYE
17.3 kVA
SEE SHEET 2 FOR CONFIGURATIONS
SEE SHEET 2 FOR PART NUMBER
TABLE

REGULATORY STANDARD: RoHS COMPLIANT

2. ADDITIONAL:
- CIRCUIT BREAKERS RATED AT 10kAIC

3. ACCESSORIES:
- (1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P48B##M - XYZ**

XX: FINISHED GOOD COLOR
BL = BLACK YL = YELLOW
RD = RED BU = BLUE
WH = WHITE GN = GREEN

Y: INPUT FEED TYPE
1 = TOP-END FED
2 = BOTTOM-END FED




Z: INPUT CORD LENGTH
A = 1 METER
B = 2 METER
C = 3 METER

FOUR CHARACTER SUFFIX FOR ALTERNATE PRODUCT CONFIGURATIONS



WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN
DATE
PRINT

TITLE	
INTELLIGENT SERIES PDU	
P48B##M-XXYZ	
CUSTOMER DRAWING	
ITEM REVISION NAME	
DATASET FILE NAME	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]	
Tolerance (mm)	
C<L≤50 ±0.5	
50<L≤250 ±1.0	
250<L≤500 ±1.5	
500<L≤1000 ±2.5	
1000<L≤2000 ±4.0	
THIRD ANGLE PROJECTION	
BY	DATE
WAC	03/08/2019
CHK	—
SCALE	NTS
MATERIAL:	
DRAWING NUMBER: P48B-2_DC	
SHEET 1 OF 2	
SIZE B	

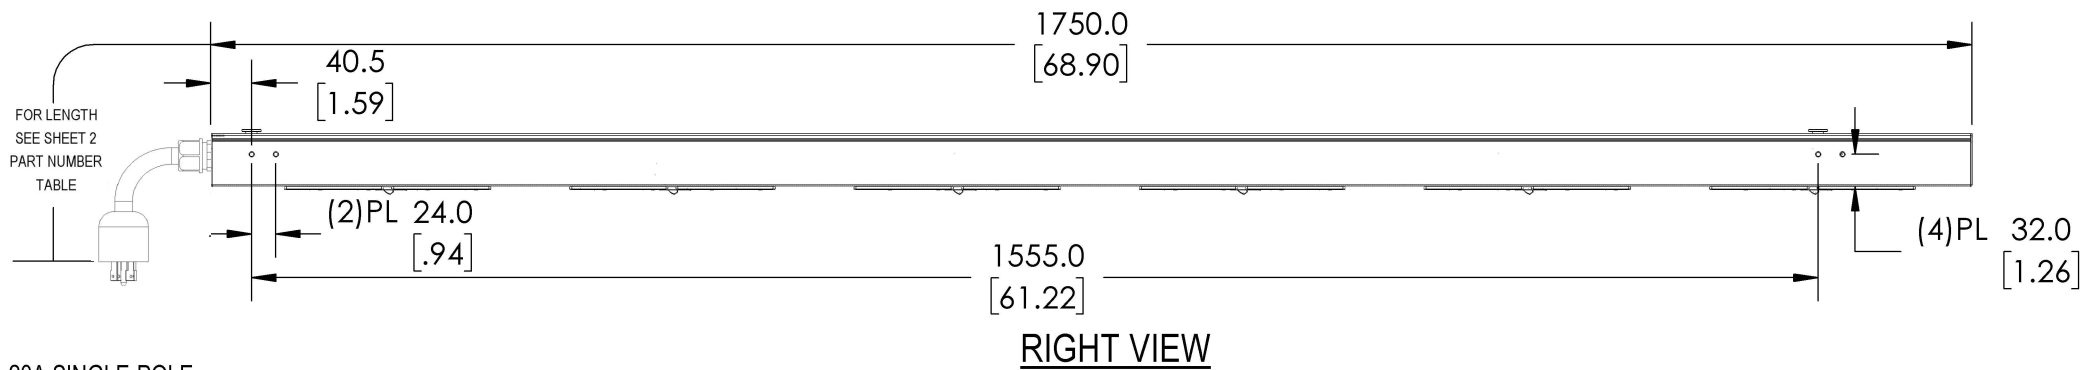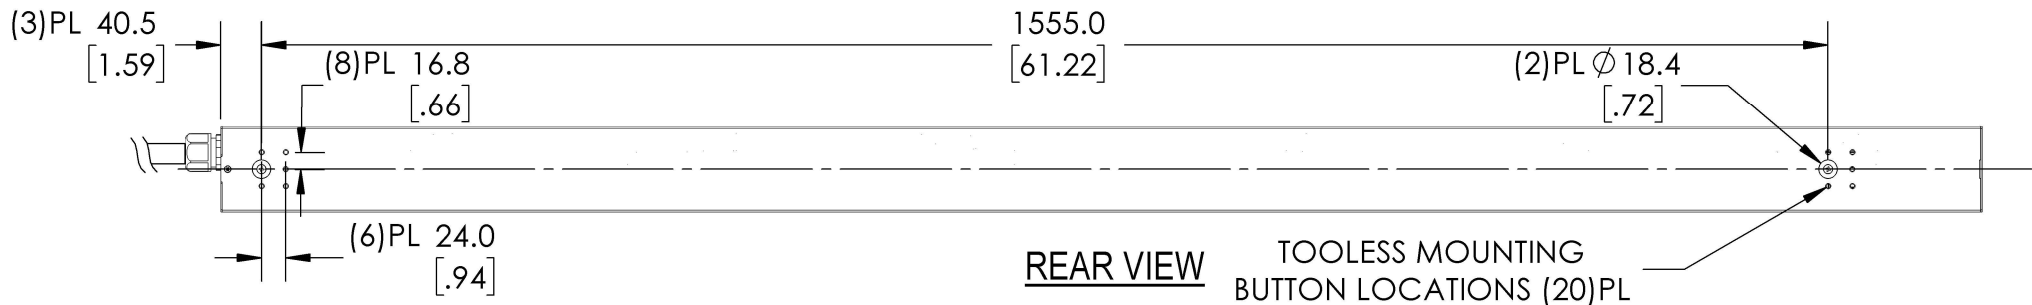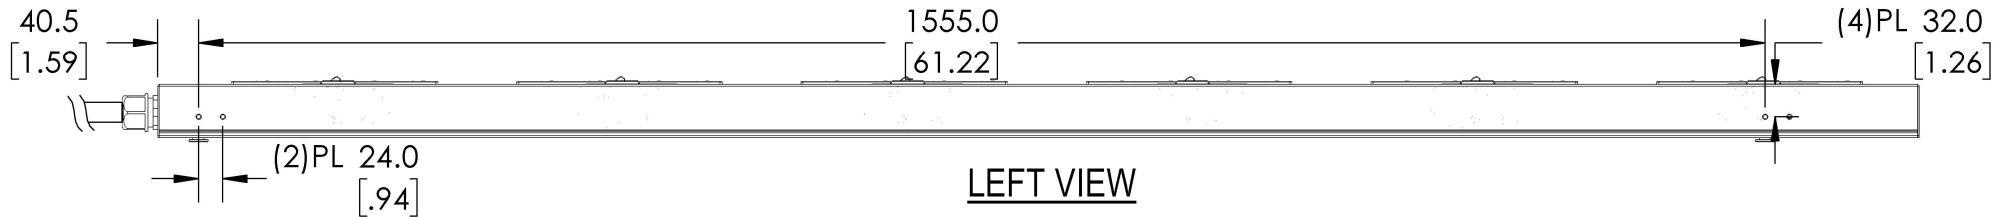


20A, SINGLE-POLE ELECTRO MECHANICAL SWITCH / BREAKER (6)PL SEE SHEET 2 FOR LOAD BANK DESIGNATIONS

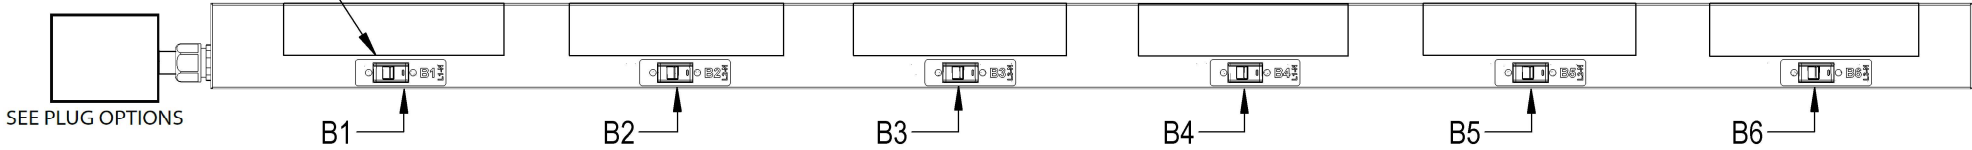


PLUG/ RECEPTACLE BLOCK



IEC 60309, 4P 5W, 6H IP67 (WATERTIGHT) 30A, 346-415V MAX RATED INPUT 24A DERATED



IEC 60309, 4P 5W, 6H IP44 (SPASHPROOF) 30A, 346-415V MAX RATED INPUT 24A DERATED



NEMA L22-30P, 4P 5W 30A, 277-480V MAX RATED INPUT 24A DERATED




IEC 60320/C13 10A, 250V MAX RATED OUTPUT

01A	03/08/2019	WAC	DACU	JAWI	RELEASED TO PRODUCTION	P48B-2
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	INPUT PLUG CONFIGURATION	RECEPTACLE CONFIGURATION	COLOR	INPUT CORD LENGTH	WEIGHT
P48B03M	VERTICAL, (48)C13, BASIC, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	L22-30P 30A 4P, 5W	(48)C13	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.0KG
P48B04M	VERTICAL, (48)C13, BASIC, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP67 (WATERTIGHT)	(48)C13	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.0KG
P48B08M	VERTICAL, (48)C13, BASIC, 200-240/346-415V/ 30A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	IEC60309 30A 4P, 5W, IP44 (SPLASHPROOF)	(48)C13	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.0KG

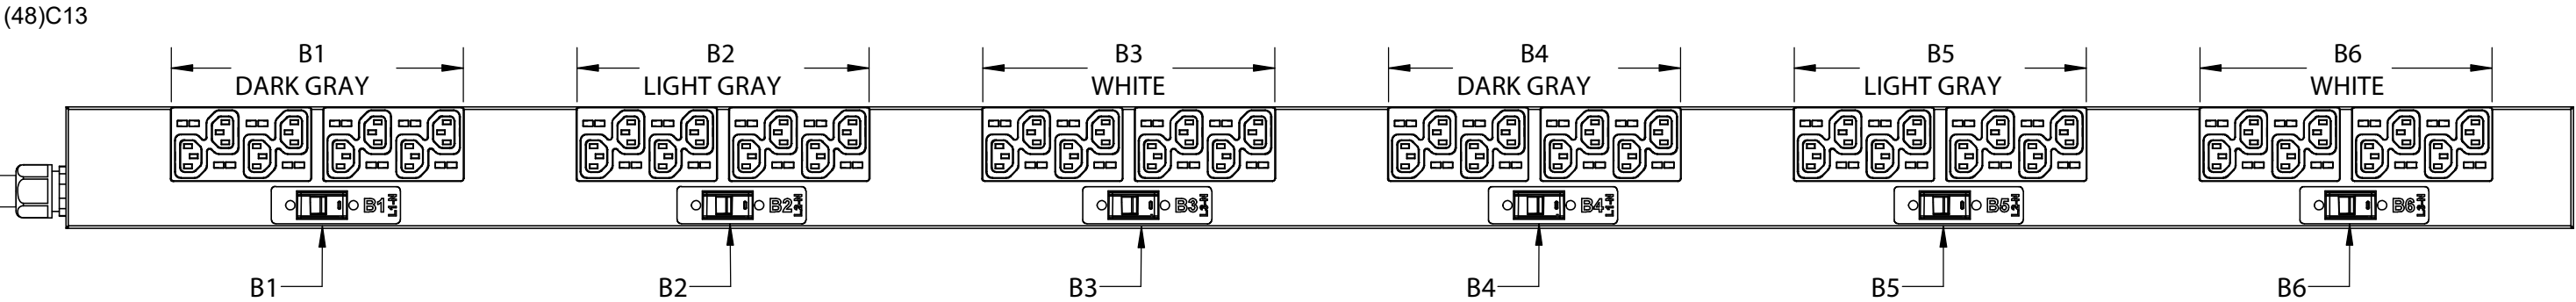

01A	03/08/2019	WAC	DACU	JAWI	RELEASED TO PRODUCTION	P48B-2
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN	
		DATE	
		PRINT	
TITLE			
INTELLIGENT SERIES PDU P48B##M-XXYZ			
CUSTOMER DRAWING			
ITEM REVISION NAME		PANDUIT	
DATASET FILE NAME			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		MATERIAL:	
Tolerance (mm)		DRAWING NUMBER:	
0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0		P48B-2_DC	
BY	DATE	CHK	SCALE
WAC	03/08/2019	-	NTS
SHEET 2 OF 2		SIZE	
		B	