


VIEW ROTATED 180°

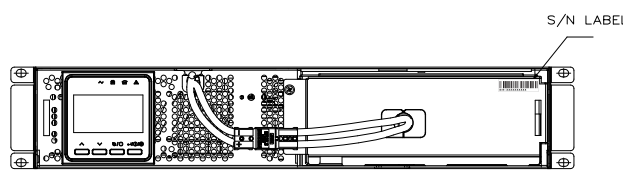


S/N LABEL


CAUTION LABEL 1 CAUTION LABEL 2

COMPLIANCE LABEL

DETAIL A
SCALE 1: 3

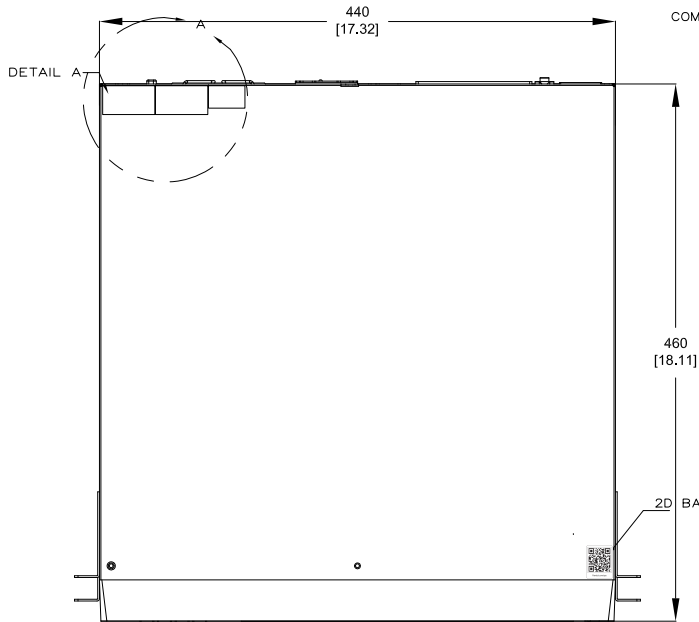

2D BARCODE LABEL

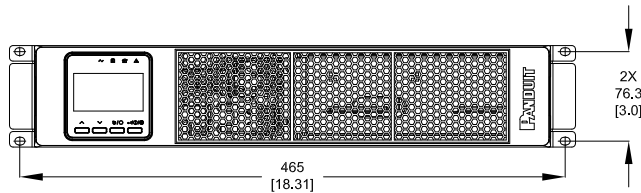

2X
76.3
[3.0]



SPECIFICATION:

1. STANDARD:

UPS TOPOLOGY:	DOUBLE CONVERSION
KVA:	2
BATTERY TYPE:	VALVE REGULATED LEAD ACID
FULL-LOAD RUN TIME (MIN):	2.9 MINUTES
INPUT PLUG:	SCHUKO CEE 7/7 (EU1-16P) AND BS1363A
NOMINAL INPUT VOLTAGE:	220/230/240VAC
INPUT PHASE:	SINGLE
OUTPUT PHASE:	SINGLE
NOMINAL OUTPUT VOLTAGE:	220/230/240VAC
OUTLET TYPE AND QTY:	IEC-C13(8) SOCKET
DISPLAY TYPE:	2.8 INCH, 4 BUTTON
PARALLEL PORT SUPPORT:	NO
INPUT BREAKER TYPE:	16A PUSH BUTTON
OUTPUT BREAKER TYPE:	N/A
WEIGHT OF Pb(LEAD):	6.8KG
WEIGHT OF H2SO4(SULFURIC ACID):	1.6KG

2. ADDITIONAL:

NONE

3. ACCESSORY COMPONENTS:

P/N U02N12V CONTAINS AN INTELLIGENT NETWORK CARD,(INSTALLED)
STABILIZER BRACKET(WITH RUBBER CUSHION), QTY:(4)
INSTALLATION EARS, QTY:(2)
PRODUCT SAFETY WARNING SHEET,QTY:(1)
INCLUDES P/N:UVC048 INTERNAL BATTERY CARTRIDGE, QTY:(1),(INSTALLED)
INCLUDES P/N:URMKIT2 INSTALLATION RAIL KIT, QTY:(1),(U02N12V ONLY)
REFER TO ASSOCIATED DRAWINGS FOR PHYSICAL DIMENSIONS AND SPECIFICATIONS
EPO PLUG WITH SHORTING WIRE,QTY:(1),(INSTALLED)
DOCUMENTATION KIT, QTY(1) – TO BE PLACED ON TOP OF ALL PACKAGING MATERIAL

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
4. ALL PURCHASED ITEMS CONFORM TO C2-0834 PANDUIT SPECIFICATION FOR CHEMICAL SUBSTANCES TO BE CONTROLLED IN PRODUCT AND PACKAGING

IDENTIFICATION:

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
U02S12V	1RUPS, 2kVA, 2U, 230V, SINGLE PHASE, DOUBLE-CONVERSION ON-LINE POWER PROTECTION	24.40
U02N12V	1RUPS, 2kVA, 2U, 230V, SINGLE PHASE, DOUBLE-CONVERSION ON-LINE POWER PROTECTION WITH INTELLIGENT NETWORK CARD	27.60

							FILE	UPS	
								U02S12V,U02N12V	
								CUSTOMER DRAWING	
02A	06/24/2022	D.L.	WZH	GLM/CAN	E-ADDED RCM LOGO F-REMOVED SMARTZONE FROM DRAWING G-GENERALIZED COUNTRY OF ORIGIN H-ADDED ADDITIONAL S/N LABEL I-ADDED RUBBER CUSHION ON TOWER KIT J-REMOVED DRIP AND USB CABLE K-UPDATED DC-AC CONVERTER L-ADDED DOCUMENTATION KIT	U02N12V	REV NUMBER: 02 U02S12V,U02N12V/02	PANDUIT	
								U02S12V,U02N12V-DC/02A	
								UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE IN (IN)	
01A	02/17/2022	D.L.	ZKZ	GLM/DJB	A-ADDED WEIGHT OF Pb AND H2SO4 B-UPDATED DESCRIPTION C-KIT WAS URMKIT1 D-SWITCH REMOVED IN METAL	U02N12V	N/A		
								UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE IN (IN)	
00A	08/17/2021	D.L.	ZKZ	GLM/DJB	RELEASE TO PRODUCTION	U02N12V	U02N12V-DC		
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DATE	THIRD ANGLE PROJECTION	REVISION
							08/17/2021	M.D.	VARIOUS
								SHT 1 OF 2	
								D	

RE-USE ONLY: THIS DOCUMENT IS THE PROPERTY OF PANDUIT CORP. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM PANDUIT CORP.	
FILE	U02S12V/U02N12V
CUSTOMER DRAWING	U02S12V/U02N12V/02
U02S12V/U02N12V-DC/02A	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE IN (IN)	N/A
THIRD ANGLE PROJECTION	
DATE	08/17/2021
BY	MJD
VARIOUS	
SHT 1 OF 2	

