


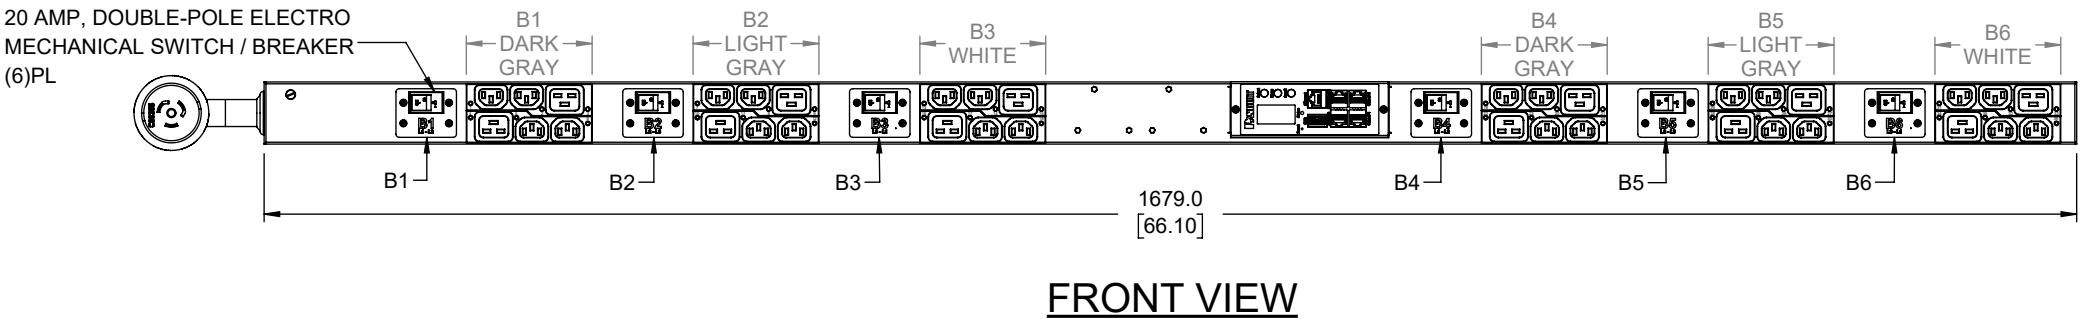
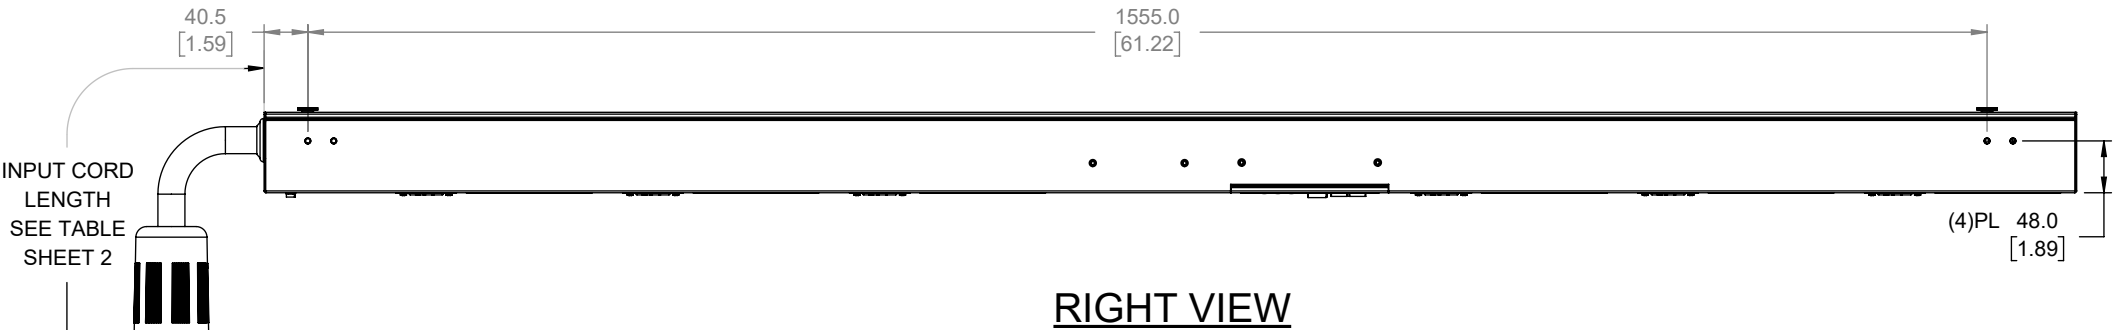


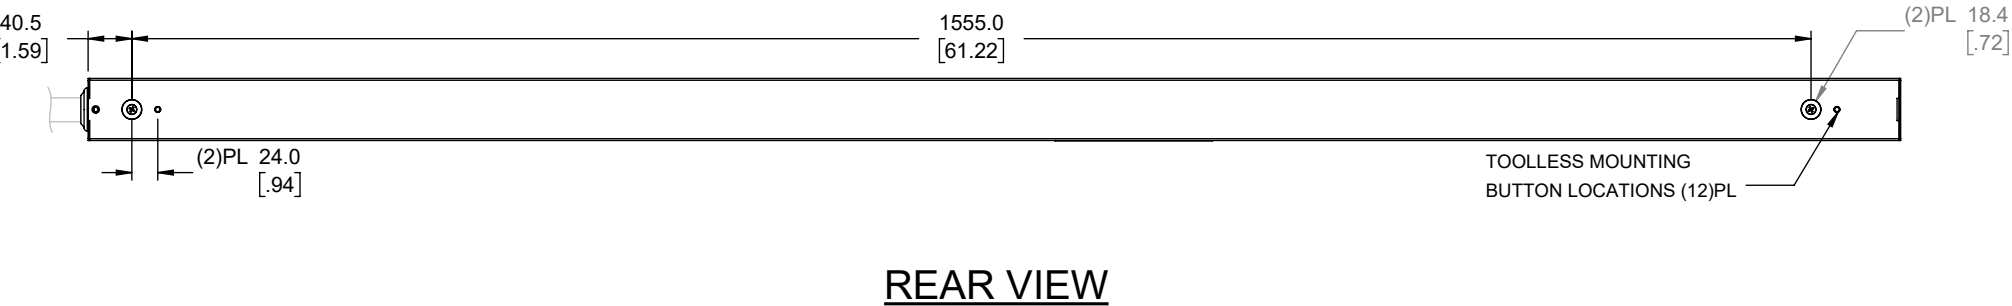

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

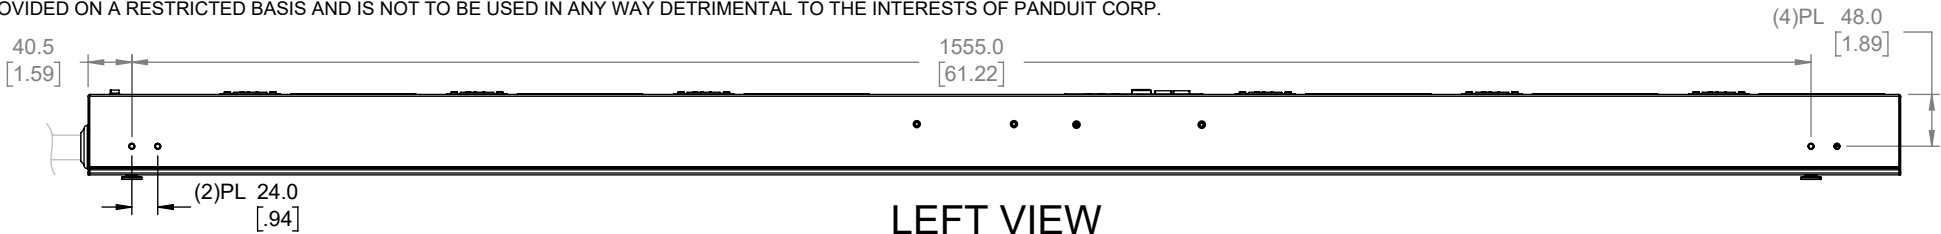

SPECIFICATION:

1. STANDARD
- | | |
|----------------------|---------------------------------|
| UNIT TYPE: | MONITORED & SWITCHED PER OUTLET |
| ORIENTATION: | VERTICAL, 0U FULL |
| OUTLET QTY & TYPE: | (24)C13, (12)C19 |
| INPUT VOLTAGE: | 200-240VAC |
| INPUT CURRENT: | 50A (40A DERATED) |
| BREAKER QTY & TYPE: | (6) 20A, DOUBLE-POLE |
| INPUT PHASE: | THREE-PHASE (DELTA) |
| RATED POWER: | 14.4 kVA |
| INPUT PLUG: | SEE TABLE SHEET 2 |
| INPUT POWER CORD: | SEE TABLE SHEET 2 |
| REGULATORY STANDARD: | RoHS COMPLIANT |
2. ADDITIONAL:
- OUTLET CONTROL RELAY: NORMALLY OPEN 80 AMP INRUSH

3. ACCESSORIES:
- (1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36G30M-XXYZ

XX: FINISHED GOOD COLOR	
BL = BLACK	YL =YELLOW
RD =RED	BU =BLUE
WH =WHITE	GN =GREEN

Y: INPUT FEED TYPE
1 =TOP-END FED
2 =BOTTOM-END FED

Z: INPUT CORD LENGTH
A =1 METER
B =2 METER
C =3 METER

PLUG / RECEPTACLE BLOCK



PLUG
CS8365, 3P 4W
50A, 250VAC MAX RATED INPUT
(40A DERATED)



RECEPTACLE
IEC 60320 C13
10A, 250V MAX RATED OUTPUT



RECEPTACLE
IEC 60320 C19
16A, 250V MAX RATED OUTPUT

01A	12/02/2021	WAC	PJST	MJD	INITIAL DC RELEASE	P36G30M
REV.	DATE	BY	CHK	APR	DESCRIPTION	ECN
REVISIONS						

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN	
		DATE	
		PRINT	
TITLE			
INTELLIGENT SERIES PDU			
P36G30M-XXYZ			
CUSTOMER DRAWING			
ITEM REVISION NAME		PANDUIT	
DATASET FILE NAME			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		MATERIAL:	
Tolerance (mm)		N/A	
0-1≤50			
50-1≤250			
250-1≤500			
500-1≤1000			
1000-1≤2000			
THRID ANGLE PROJECTION		DRAWING NUMBER:	
BY		SHEET 1 OF 2	
WAC			
DATE	11/18/2021	SIZE	
CHK	-		
SCALE	NTS	B	


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36G30M	MSPO PDU, 50AMP, (24)C13, (12)C19, CS8365 3P+E 6H-3M, TOP FED, BLACK	BLACK (9005)	3M (+254MM / -127MM) [10'(+10"/-5")]	12.2kg

01A	12/02/2021	WAC	PJST	MJD	INITIAL DC RELEASE	P36G30M
REV.	DATE	BY	CHK	APR	DESCRIPTION	ECN
REVISIONS						

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.				SIGN											
				DATE											
				PRINT											
TITLE															
INTELLIGENT SERIES PDU															
P36G30M-XXYZ															
CUSTOMER DRAWING															
ITEM REVISION NAME															
DATASET FILE NAME															
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]				MATERIAL:											
 Tolerance (mm) <table><tr><td>0<L≤50</td><td>±0.5</td></tr><tr><td>50<L≤250</td><td>±1.0</td></tr><tr><td>250<L≤500</td><td>±1.5</td></tr><tr><td>500<L≤1000</td><td>±2.5</td></tr><tr><td>1000<L≤2000</td><td>±4.0</td></tr></table>				0<L≤50	±0.5	50<L≤250	±1.0	250<L≤500	±1.5	500<L≤1000	±2.5	1000<L≤2000	±4.0	N/A	
				0<L≤50	±0.5										
50<L≤250	±1.0														
250<L≤500	±1.5														
500<L≤1000	±2.5														
1000<L≤2000	±4.0														
				DRAWING NUMBER:											
				P36G30M_DC											
BY	DATE	CHK	SCALE	SHEET 2 OF 2											
WAC	11/18/2021	-	NTS	SIZE B											

2

1