



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

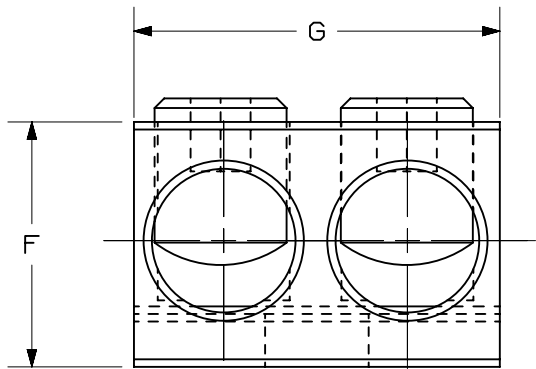

NOTES:

1. MATERIAL:
BODY - ALUMINUM, TIN PLATED
SCREW - ALUMINUM, TIN PLATED
2. cULus LISTED FOR USE UP TO 600V & TEMPERATURE RATED 90° C (AL9CU)
3. DUAL RATED FOR USE WITH COPPER OR ALUMINUM STRANDED CODE CONDUCTOR
4. PARTS ARE RoHS COMPLIANT
5. USE OF OXIDE INHIBITING JOINT COMPOUND LIKE PANDUIT CMP-100 RECOMMENDED FOR PAD TO PAD AND CONDUCTOR SURFACES
6. SEE INSTRUCTION SHEET T-PMPI-223-PC FOR TIGHTENING TORQUE INFORMATION
7. DIMENSIONS IN BRACKETS ARE MILLIMETERS

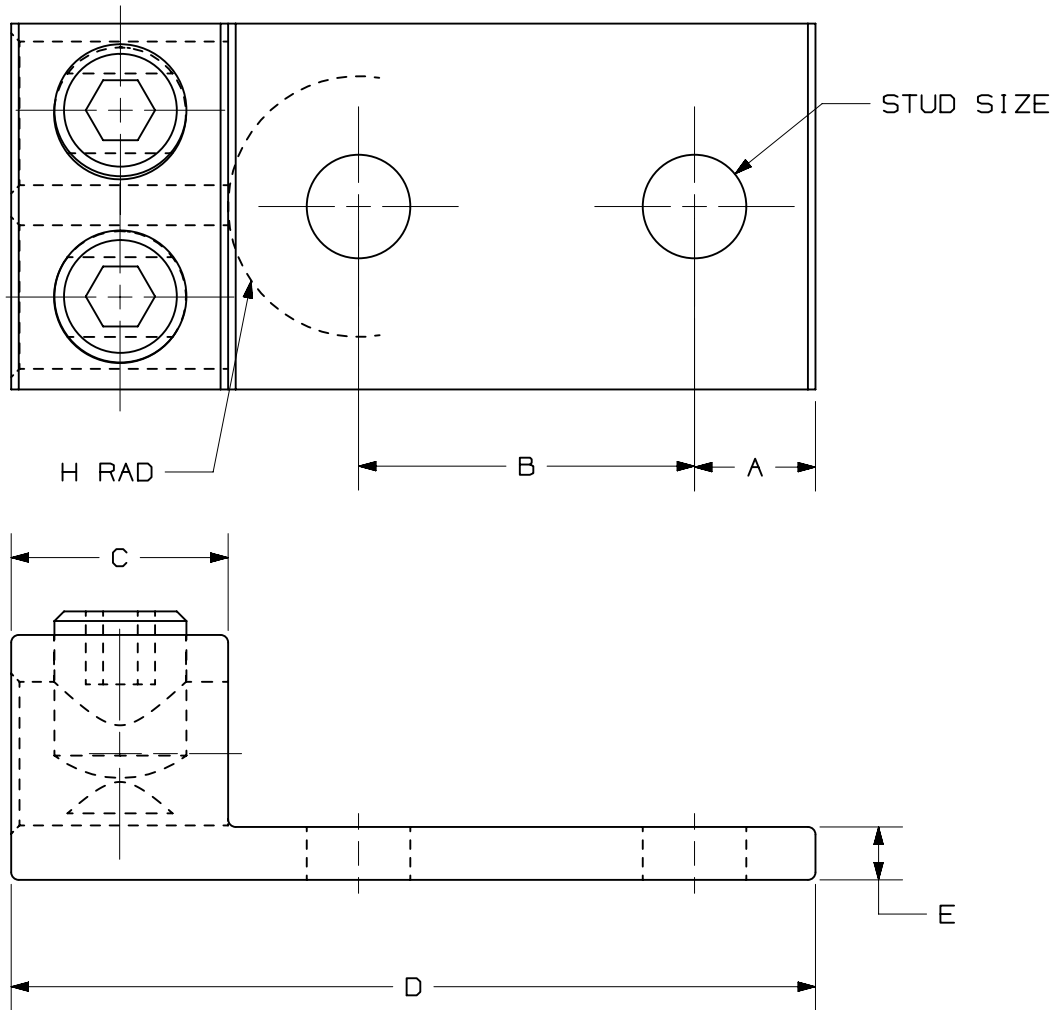

PART NUMBER	WIRE RANGE COPPER/ALUMINUM	WIRE STRIP LENGTH	STUD SIZE IN.	PACKAGING QUANTITY	DIMENSIONS - IN [mm] ± .02 [.5]								HEX KEY
					A	B	C	D	E	F	G	H	
LAM2B350-12-8	6 AWG - 350 kcmil	1-1/8	1/2	8	.63 [16.0]	1.75 [44.5]	1.13 [28.7]	4.19 [106.4]	.28 [7.0]	1.28 [32.4]	1.91 [48.4]	.68 [17.3]	3/8

01A	9-20-24	JHNU	JHNU	MRWA	A. REVISED DRAWING TITLE	135288/01
00	10-24-23	JHNU	JHNU	MRWA	DRAWING RELEASED	135288/00
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PART NUMBER		SEE TABLE			
TITLE		LAM2B SERIES ALUMINUM MECHANICAL CONNECTOR			
CUSTOMER DRAWING					
ITEM REVISION NAME		03468NBC/01			
DATASET FILE NAME		03468NBC-DC/01A			
		THIRD ANGLE PROJECTION			
MATERIAL		SEE NOTES		DRAWING NUMBER	
				03468NBC - DC	
DRAWN BY	DATE	CHK	SCALE	SHEET 1 OF 1	
JHNU	10-24-23	JHNU	NONE	B	