


B



1. SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
3. PART NUMBERS: SEE SHEET 2 FOR METHOD A.
4. METHOD A CASSETTES COMPLY WITH ANSI/TIA-568-C.O. SEE ANSI/TIA-568-C.O FOR POLARITY DETAILS AND EXAMPLE OF A BASIC LINK.
5. MATERIALS:
 - A. BOX AND LID: PLASTIC
 - B. ADAPTER: COMPOSITE PLASTIC
6. CASSETTE WEIGHT: 4.73oz [134g]
7. DIMENSIONS IN BRACKETS ARE METRIC.

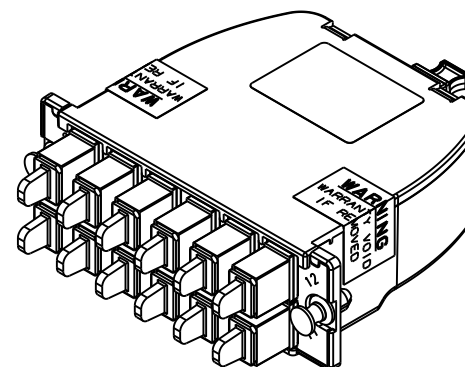

- SEE SHEET 2 FOR
ARTWORK DETAILS

☐

SHOWN W/O DUSTCAPS


1

2


1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

12 FIBER SIMPLEX SC CASSETTE - METHOD A	
PART NUMBER	DESCRIPTION
FC2Z0-12-3SAS	12 FIBER 50/125um OM4 OPTIMIZED
FC2ZN-12-3SAS	12 FIBER 50/125um OM4
FC2X0-12-3SAS	12 FIBER 50/125um OM3 OPTIMIZED
FC2XN-12-3SAS	12 FIBER 50/125um OM3
FC25N-12-3SAS	12 FIBER 50/125um OM2
FC26N-12-3SAS	12 FIBER 62.5/125um OM1
FC29N-12-3SAS	12 FIBER 9/125um OS1/OS2

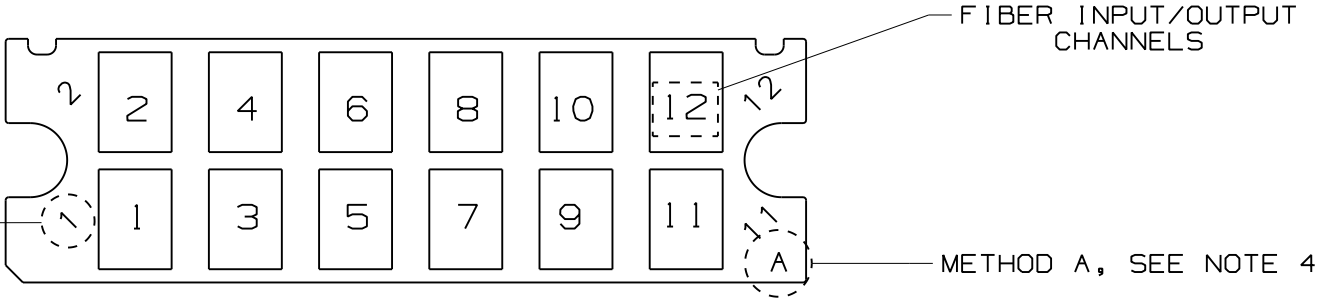

METHOD A - FIBER LAYOUT

							TITLE 12 FIBER SIMPLEX SC CASSETTE METHOD A CUSTOMER DRAWING						
							ITEM REVISION NAME 10F113AG/02						
							DATASET FILE NAME 10F113AG_DC/02A						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .x ± .03 (.8) .xxx ± .005 (.127) .xx ± .01 (.25) ANGLES ± 5 °			MATERIAL : SEE NOTES SHEET 1			
R	10-10-12	SAT	TMSE		RELEASED TO PRODUCTION	10F113AG-DC				THIRD ANGLE PROJECTION			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY SAT	DATE 10-01-12	CHK TMSE	SCALE NONE	DRAWING NUMBER: 10F113AG-DC		SIZE A

2

1

