


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2


1. STANDARD:
 - UNIT TYPE: MONITORED OUTLET
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (30) C13, (6) C19
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 30A (24A DERATED)
 - BREAKER QTY & TYPE: (2) 20AMP, DOUBLE-POLE
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: 5.0 kVA
 - INPUT PLUG: NEMA L6-30P
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL:
 - THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS
3. ACCESSORIES:
 - DOCUMENTATION KIT
 - PRODUCT SAFETY WARNING SHEET

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD P5
ART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: **P36F15G-XX Y Z**

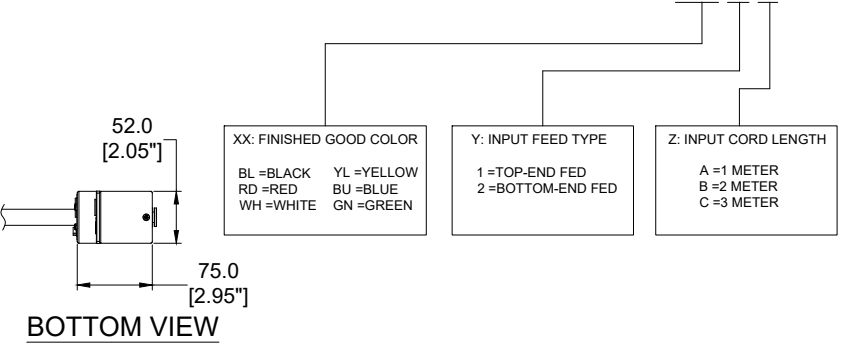

00A	09/27/2023	CCQ	CSH	MJD	INITIAL RELEASE	P36F15G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36F15G-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				N/A	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0				DRAWING NUMBER: P36F15G-XXYZ_DC	
DRAWN BY CCQ	DATE 09/27/2023	CHK CSH	SCALE NONE	SHT 1 OF 2	
				SCALE B	

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36F15G	G6 MO PDU, 30AMP, (30)C13 (6)C19, NEMA L6-30P-3M, TOP FED, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	9.9kg

B

B

A

A

							WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT					
							TITLE INTELLIGENT SERIES PDU P36F15G-XXYZ CUSTOMER DRAWING							
							ITEM REVISION NAME							
							DATASHEET FILE NAME:							
							UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A					
							Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P36F15G-XXYZ_DC					
00A	09/27/2023	CCQ	CSH	MJD	INITIAL RELEASE	P36F15G-XXYZ		THIRD ANGLE PROJECTION	DRAWN BY CCQ	DATE 09/27/2023	CHK CSH	SCALE NONE	SHT 2 OF 2	SCALE B
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN								

2



1