

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P16D22G-XYZ	2.0kg

SPECIFICATION:

1. STANDARD:

UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, HALF
OUTLET QTY&TYPE:	(16) 5-20R
INPUT VOLTAGE:	100-120VAC
INPUT CURRENT:	20A (16A DERATED)
BREAKER QTY&TYPE:	N/A
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	1.9kVA
INPUT PLUG:	NEMA L5-20P
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:

THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS

3. ACCESSORIES:


DOCUMENTATION KIT
PRODUCT SAFETY WARNING SHEET

NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL.
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION.

IDENTIFICATION


PART NUMBER	DESCRIPTION
P16D22G	G6 MI PDU, 20AMP, (16)5-20R, NEMA L5-20P-3M,TOP FED,BLACK

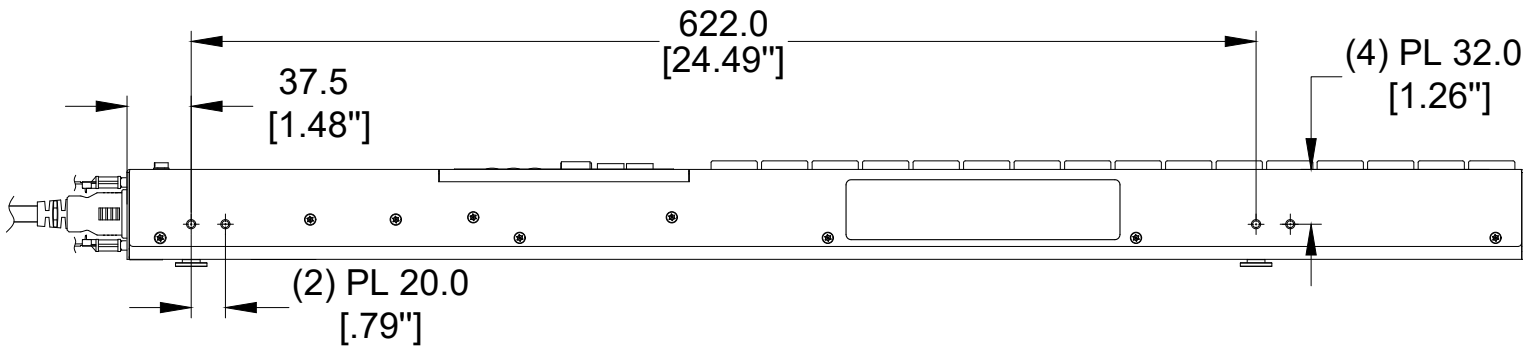


BOTTOM VIEW

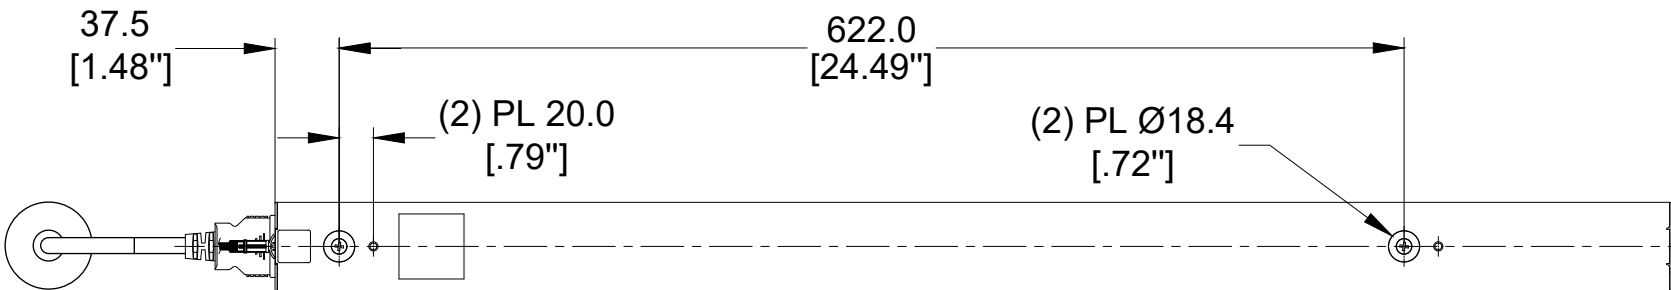


REAR VIEW

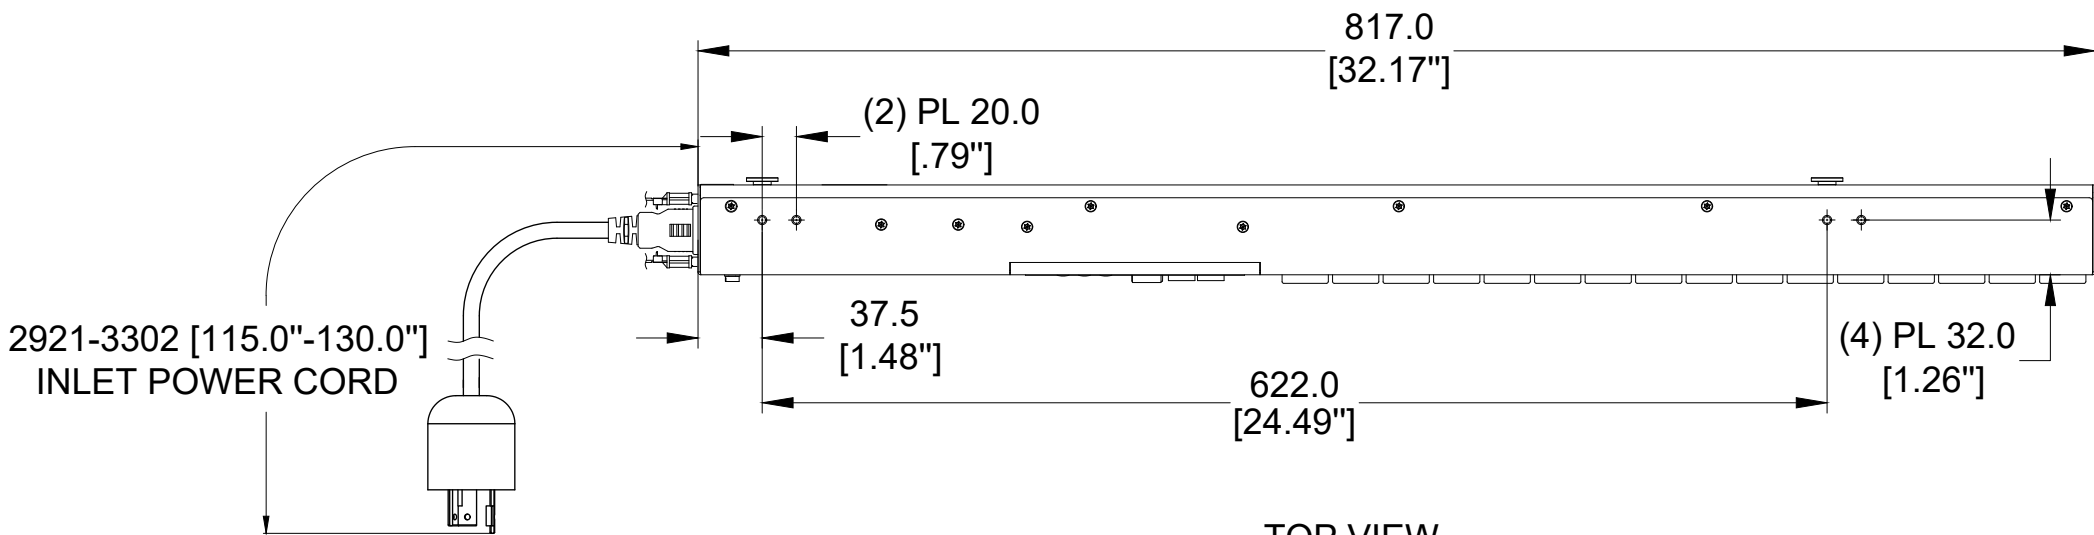

TOP VIEW

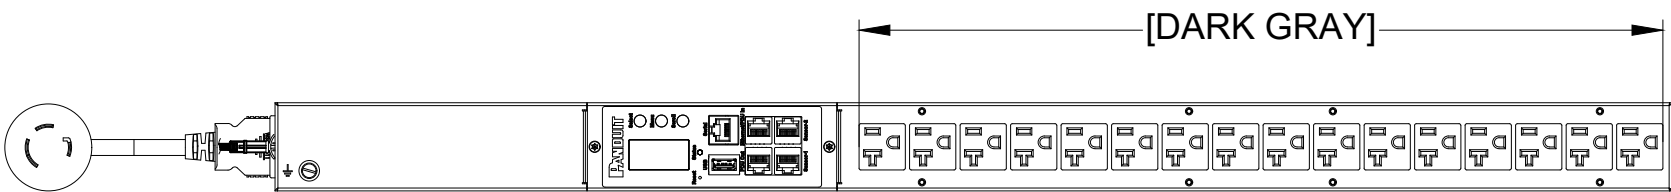


FRONT VIEW

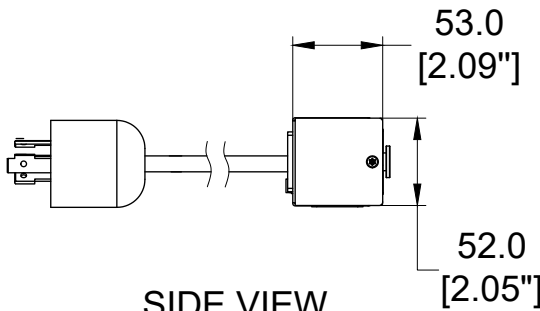

SIDE VIEW




PLUG
NEMA L5-20P, 2P 3W
20A, 125V MAX RATED INPUT
16A DERATED



SIXTEEN (16)
RECEPTACLES
NEMA 5-20R
16A, 125V MAX RATED OUTPUT

00A	09/07/2023	LWB	CSH	MJD	INITIAL RELEASE	P16D22G

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
-----	------	----	-----	-----	-------------	-----

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE			
INTELLIGENT SERIES PDU P16D22G CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A	
		DRAWING NUMBER: P16D22G_DC	
DRAWN BY	DATE	CHK	SCALE
LWB	09/07/2023	SEAN	NONE
SHT 1 OF 2			SCALE B

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P16D22G	G6 MI PDU,20AMP,(16) 5-20R,NEMA L5-20P-3M, TOP FED,BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	2.0Kg

B

B

A

A

00A	09/07/2023	LWB	CSH	MJD	INITIAL RELEASE	P16D22G
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P16D22G CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		MATERIAL/COLOR: N/A	
		DRAWING NUMBER: P16D22G_DC	
DRAWN BY LWB	DATE 09/07/2023	CHK SEAN	SCALE NONE
SHT 2 OF 2			SCALE B

2



1