

1. STANDARD:

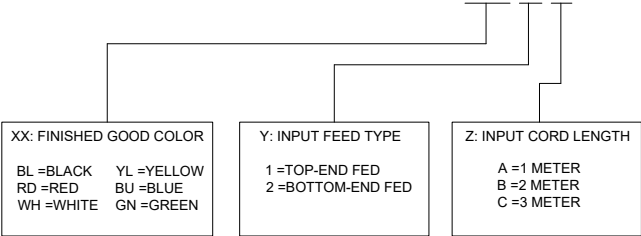
UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(24)C13, (12)C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	50A (40A DERATED)
BREAKER QTY&TYPE:	(6) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE DELTA
RATED POWER:	14.4 KVA
INPUT PLUG:	CS8365
INPUT POWER CORD:	SEE SHEET 2 PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT
2. ADDITIONAL:



THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE
WITH ANY LEGACY CONTROLLERS
3. ACCESSORIES:

DOCUMENTATION KIT
PRODUCT SAFETY WARNING SHEET


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P36D30G-XX Y Z



<u>PLUG/RECEPTACLE BLOCK</u>	
	PLUG CS8365, 3P 4W 50A, 250VAC MAX RATED INPUT (40A DERATED)
	RECEPTACLES C13/C15 COMBO 10A, 250V MAX RATED OUTPUT
	RECEPTACLES C13/C15/C19 COMBO 16A, 250V MAX RATED OUTPUT

00A	12/01/2023	NW	CSH	MJD	INITIAL RELEASE	P36D30G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36D30G-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME: DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]					
 THIRD ANGLE PROJECTION				Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0	
MATERIAL/COLOR: N/A				DRAWING NUMBER: P36D30G-XXYZ_DC	
DRAWN BY NW		DATE 12/01/2023		CHK CSH	
SCALE NONE		SHT 1 OF 2		SCALE B	

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36D30G	G6 MI PDU, 50AMP, (24) C13 (12) C19, CS8365-3M, TOP FED, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	11.2kg

B

B

A

A

							WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY SIGN DATE PRINT
00A	12/01/2023	NW	CSH	MJD	INITIAL RELEASE	P36D30G-XXYZ	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	

TITLE:

INTELLIGENT SERIES PDU
P36D30G-XXYZ
CONTROL DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE
PROJECTION

Tolerance(mm)

0<L<50 ±0.5

50<L<250 ±1.0

250<L<500 ±1.5

500<L<1000 ±2.5

1000<L<2000 ±4.0

MATERIAL/COLOR:

N/A

DRAWING NUMBER:

P36D30G-XXYZ_DC

DRAWN BY

DATE

CHK

SCALE

NW

12/01/2023

CSH

NONE

SHT 2 OF 2

SCALE

B

2



1