




PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

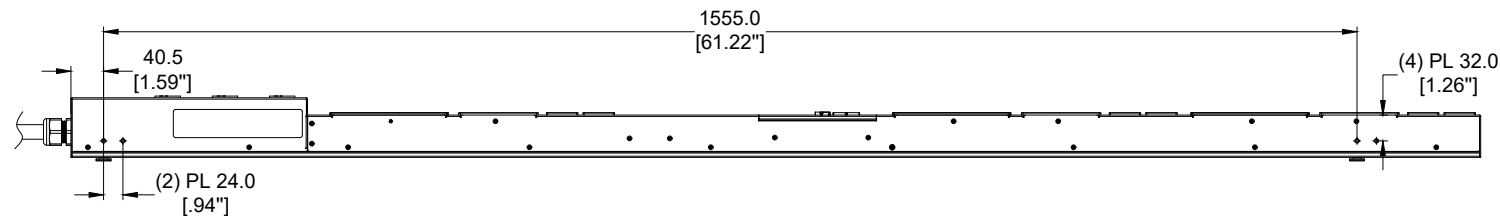


LEFT VIEW

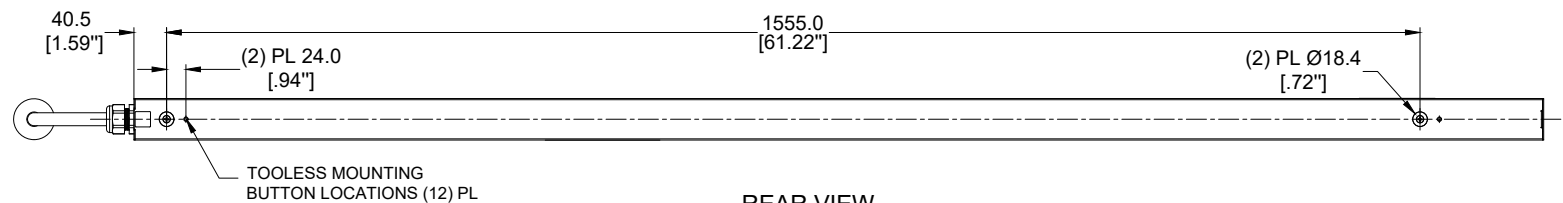


REAR VIEW

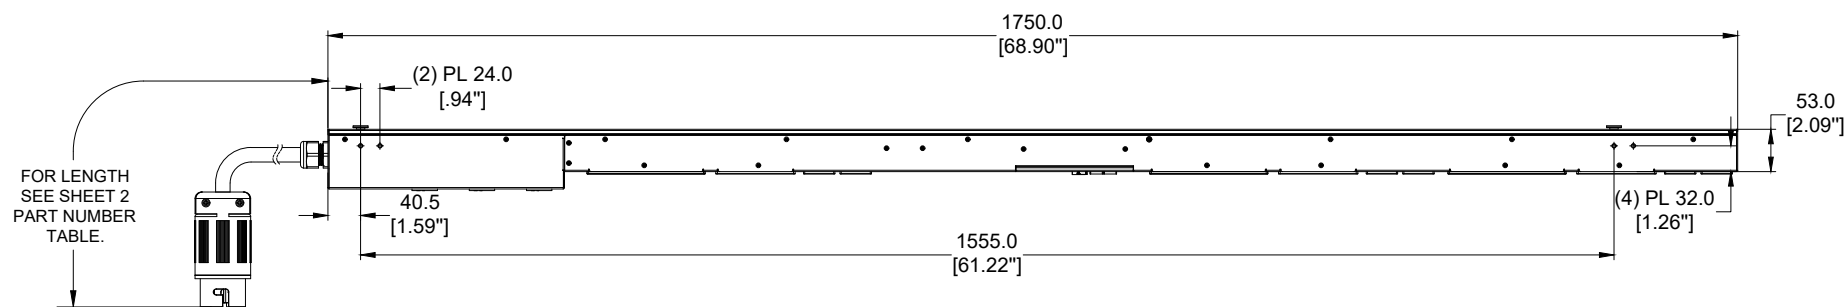

RIGHT VIEW

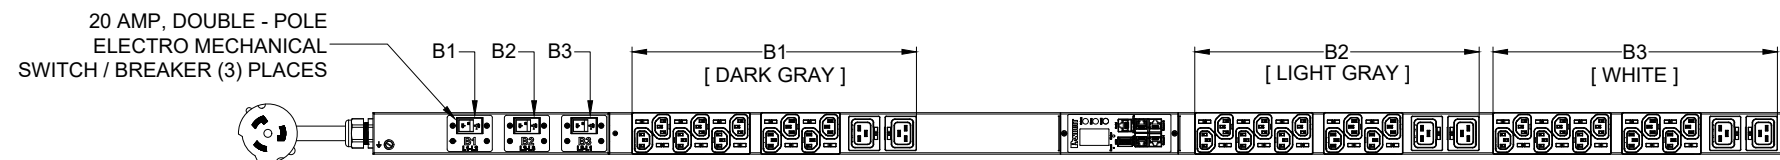

FRONT VIEW



BOTTOM VIEW


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION
6. PARTS USING UPGRADABLE iPDU BLANKING PANEL CAN BE UPGRADED TO INTELLIGENT MODELS USING PANDUIT CONTROLLER PART NUMBER MA002

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P36D29G-XX Y Z

XX: FINISHED GOOD COLOR BL =BLACK YL =YELLOW RD =RED BU =BLUE WH =WHITE GN =GREEN	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
--	--	---



PLUG
CS8365, 3P 4W
50A, 250V, 3-PHASE MAX RATED INPUT
40A DERATED




RECEPTACLE
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLE
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

00A	08/31/2023	CCQ	CSH	MJD	INITIAL RELEASE	P36D29G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36D29G-XXYZ CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION		N/A	
Tolerance(mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0		DRAWING NUMBER: P36D29G-XXYZ_DC	
DRAWN BY COQ	DATE 08/31/2023	CHK CSH	SCALE NONE
SHT 1 OF 2		SCALE B	

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36D29G	G6 MI PDU, 50AMP, (30)C13 (6)C19, CS8365-3M,TOP FED, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10"/-5"]	7.9kg

B



A

B



A

							WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT			
							TITLE INTELLIGENT SERIES PDU P36D29G-XXYZ CUSTOMER DRAWING					
							ITEM REVISION NAME:					
							DATASHEET FILE NAME:					
							UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] THIRD ANGLE PROJECTION Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		MATERIAL/COLOR: N/A			
00A	08/31/2023	CCQ	CSH	MJD	INITIAL RELEASE	P36D29G-XXYZ			DRAWING NUMBER: P36D29G-XXYZ_DC			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY CCQ	DATE 08/31/2023	CHK CSH	SCALE NONE	SHT 2 OF 2	SCALE B

2



1