

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2


1. STANDARD:	
UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY & TYPE:	(12) C13, (12) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	60A (48A DERATED)
BREAKER QTY & TYPE:	(6) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE, DELTA
RATED POWER:	17.3 kVA
INPUT PLUG:	IEC 60309 3P+E 9H 60A
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT


NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P24D34G-XX Y Z



WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P24D34G-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				N/A	
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0				DRAWING NUMBER: P24D34G-XXYZ_DC	
DRAWN BY NW	DATE 08/30/2023	CHK CSH	SCALE NONE	SHT 1 OF 2	
				SCALE B	

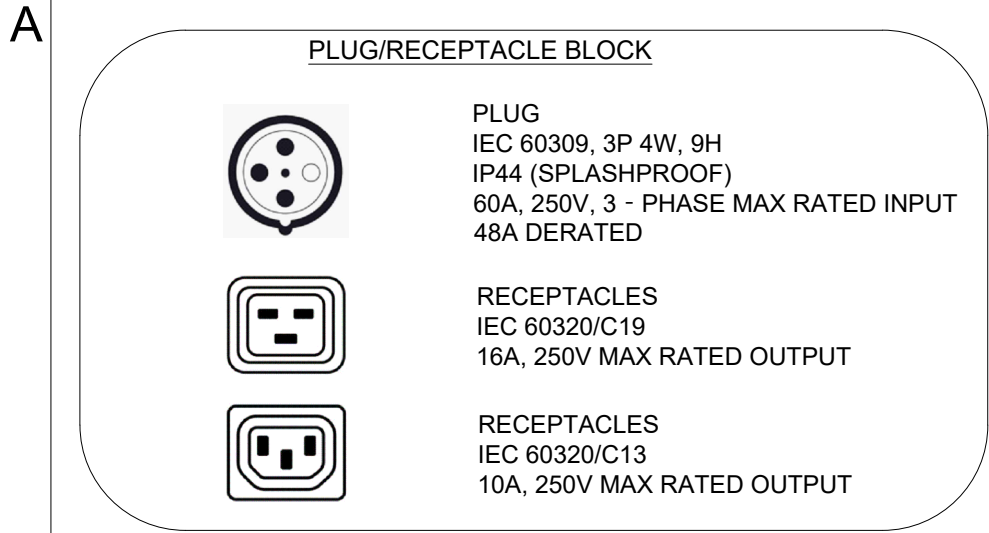

00A	09/21/2023	NW	CSH	MJD	INITIAL RELEASE	P24D34G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24D34G	G6 MI PDU, 60AMP, (12) C13 (12) C19, IEC 60309 3P 4W 9H IP44-3M, TOP FED, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	13.7kg

B

B

A

A

						WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT									
						TITLE INTELLIGENT SERIES PDU P24D34G-XXYZ CUSTOMER DRAWING											
						ITEM REVISION NAME											
						DATASHEET FILE NAME:											
						UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR: N/A							
						Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0				DRAWING NUMBER: P24D34G-XXYZ_DC							
00A		09/21/2023		NW CSH MJD		INITIAL RELEASE		P24D34G-XXYZ		DRAWN BY DATE NW 08/30/2023		CHK SCALE CSH NONE		SHT 2 OF 2		SCALE B	
REV		DATE		BY		CHK		APR		DESCRIPTION		ECN					

