

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

1. STANDARD:

UNIT TYPE:	SEE SHEET 2
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY & TYPE:	(30) C13, (6) C19, (2) 5-20R
INPUT VOLTAGE:	100-120/200-240VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY & TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	THREE-PHASE, WYE
RATED POWER:	8.6 kVA
INPUT PLUG:	NEMA L21-30P
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:

THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS


3. ACCESSORIES:


DOCUMENTATION KIT

PRODUCT SAFETY WARNING SHEET

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P38D28G-XX Y Z

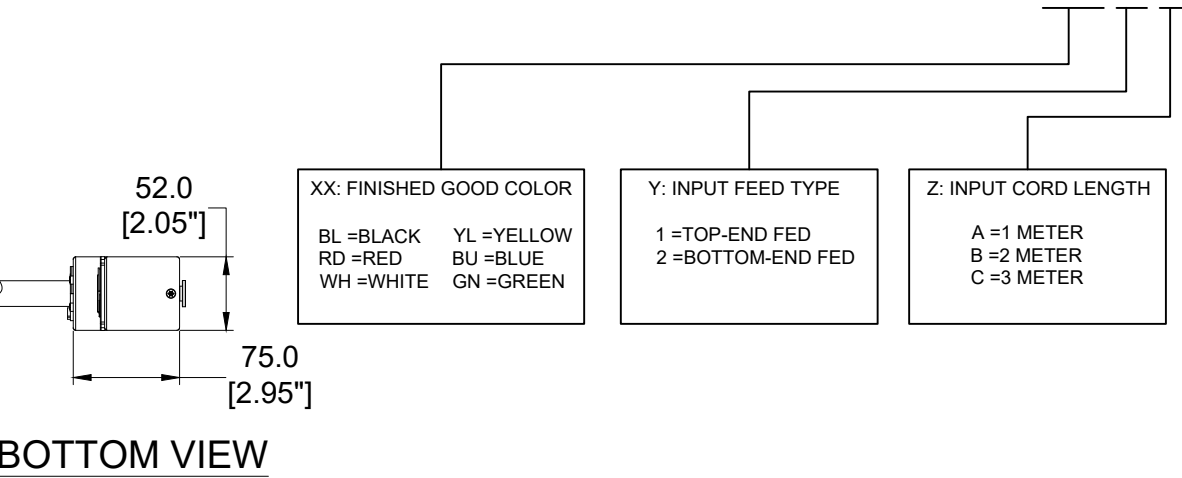

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT											
TITLE INTELLIGENT SERIES PDU P38D28G-XXYZ CUSTOMER DRAWING															
ITEM REVISION NAME															
DATASHEET FILE NAME:															
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]			MATERIAL/COLOR:												
 THIRD ANGLE PROJECTION			Tolerance(mm) <table border="0"> <tr><td>0<L<50</td><td>±0.5</td></tr> <tr><td>50<L<250</td><td>±1.0</td></tr> <tr><td>250<L<500</td><td>±1.5</td></tr> <tr><td>500<L<1000</td><td>±2.5</td></tr> <tr><td>1000<L<2000</td><td>±4.0</td></tr> </table> N/A			0<L<50	±0.5	50<L<250	±1.0	250<L<500	±1.5	500<L<1000	±2.5	1000<L<2000	±4.0
0<L<50	±0.5														
50<L<250	±1.0														
250<L<500	±1.5														
500<L<1000	±2.5														
1000<L<2000	±4.0														
DRAWN BY LWB			DRAWING NUMBER: P38D28G-XXYZ_DC												
DATE 08/30/2023		CHK SEAN		SCALE NONE											
				SHT 1 OF 2											
				SCALE B											

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MAIN PDU CONFIGUGRATIONS				
FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P38D28G	G6 MI PDU,30AMP,(30) C13,(6) C19,(2) 5-20R, NEMA L21-30P-3M, TOP FED,BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	8.3kg

B

B



00A	08/30/2023	LWB	CSH	MJD	INITIAL RELEASE	P38D28G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P38D28G-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] THIRD ANGLE PROJECTION Tolerance(mm) 04<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		MATERIAL/COLOR: N/A
DRAWN BY: LWB DATE: 08/30/2023 CHK: SEAN SCALE: NONE		DRAWING NUMBER: P38D28G-XXYZ_DC
SHT 2 OF 2		SCALE: B

A

2



1