


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2


1. STANDARD:
 - UNIT TYPE: MONITORED SWITCHED
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (30)C13, (6)C19
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 30A (24A DERATED)
 - BREAKER QTY & TYPE: (2) 20AMP, DOUBLE-POLE
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: 5.0 kVA
 - INPUT PLUG: NEMA L6-30P
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL:
 - THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE WITH ANY LEGACY CONTROLLERS
3. ACCESSORIES:
 - DOCUMENTATION KIT
 - PRODUCT SAFETY WARNING SHEET

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD P5
ART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P36E33G-XX Y Z

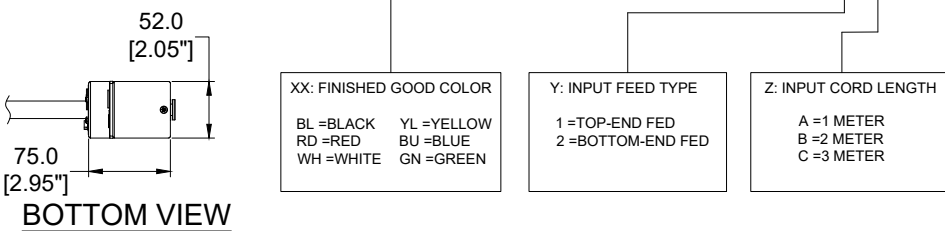

00A	09/21/2023	NW	CSH	MJD	INITIAL RELEASE	P36E33G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36E33G-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0					
 THIRD ANGLE PROJECTION				MATERIAL/COLOR: N/A	
DRAWN BY NW				DRAWING NUMBER: P36E33G-XXYZ_DC	
DATE 08/30/2023		CHK CSH		SCALE NONE	
				SHT 1 OF 2	
				SCALE B	



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36E33G	G6 MS PDU, 30AMP, (30) C13 (6) C19, NEMA L6-30P-3M, TOP FED, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	9.2kg

B

B

A

A

						WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN											
								DATE											
								PRINT											
						TITLE													
						INTELLIGENT SERIES PDU P36E33G-XXYZ CUSTOMER DRAWING													
						ITEM REVISION NAME													
						DATASHEET FILE NAME:													
						UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]													
						Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0													
						THIRD ANGLE PROJECTION													
						MATERIAL/COLOR:													
						N/A													
						DRAWING NUMBER:													
						P36E33G-XXYZ_DC													
REV		DATE		BY		CHK	APR	DESCRIPTION		ECN		DRAWN BY		DATE	CHK	SCALE	SHT 2 OF 2		SCALE
												NW		08/30/2023	CSH	NONE			B

