

B

B

A

A

B-SIZE CUSTOMER


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	DIMENSIONS - IN								
	$\overset{L}{\pm .06}$ [1.5]	$\overset{W}{\pm .06}$ [1.5]	$\overset{G}{\pm .06}$ [1.5]	$\overset{D \text{ DIA}}{\pm .02}$ [0.5]	$\overset{C \text{ RAD REF}}{\text{REF}}$	$\overset{T}{\pm .02}$ [0.5]	$\overset{B}{\pm .06}$ [1.5]	$\overset{O.D.}{\pm .02}$ [0.5]	$\overset{I.D.}{\pm .02}$ [0.5]
LCAXN300-38-6	3.24 [82.3]	0.95 [24.1]	0.50 [12.7]	0.41 [10.3]	0.67 [17.0]	0.23 [5.7]	1.50 [38.1]	0.95 [24.1]	0.76 [19.4]

PART NUMBER	WIRE SIZE	WIRE TYPE	WIRE STRIP LENGTH	STUD SIZE	PANDUIT COLOR CODE ON BARREL	PANDUIT DIE INDEX NO. ON BARREL	ALTERNATE INDUSTRY DIE INDEX NO. ON BARREL
LCAXN300-38-6	300 STR/FLEX	STRANDED COPPER: CLASS G, H, I, K, M, LOCOMOTIVE	1-9/16	3/8	RED	P71	(18)

NOTES:

1. MATERIAL: ELECTRO-TIN PLATED HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
2. UL LISTED FOR APPLICATIONS UP TO 35 KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
3. UL TEMPERATURE RATING: 90° C
4. CSA CERTIFIED
5. DIMENSIONS IN BRACKETS ARE MILLIMETERS

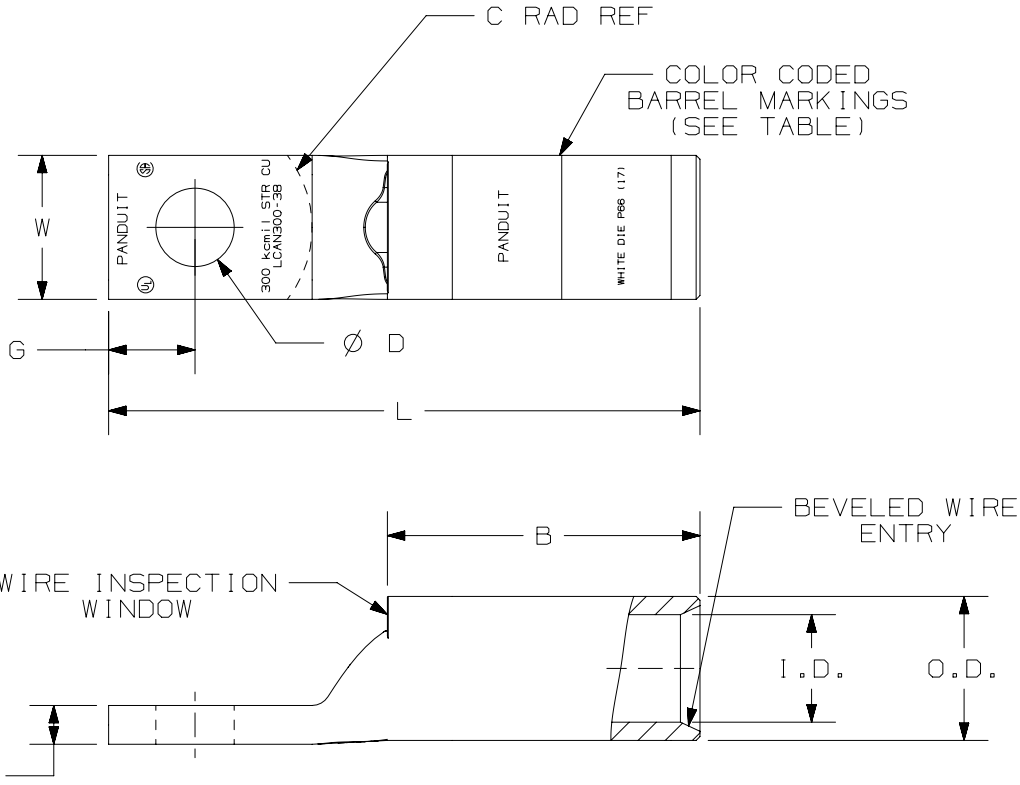

00B	01-30-26	RIAS	DPOI	JSUN	DIMENSION L WAS 2.91. B WAS 1.19. TOLERANCE W WAS $\pm .04$, G WAS $\pm .04$, T WAS $\pm .01$, B WAS $\pm .04$, O.D. WAS $\pm .01$, I.D. WAS $\pm .01$.	029985/00
00A	10-2-24	JHNU	ALP	MRWA	DRAWING RELEASED	-
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PART NUMBER						SEE TABLE	
TITLE						LCAXN300-38-6 NARROW TONGUE LUGS	
ITEM REVISION NAME						CUSTOMER DRAWING	
DATASET FILE NAME						03038NBQ-DC/00B	
MATERIAL						SEE NOTES	
DRAWN BY						JHNU	
DATE						10-2-24	
CHK						ALP	
SCALE						NONE	
DRAWING NUMBER						03038NBQ-DC	
SHEET 1 OF 1						B	