


FRONT VIEW



LEFT VIEW
CONNECTOR COLOR: GREY

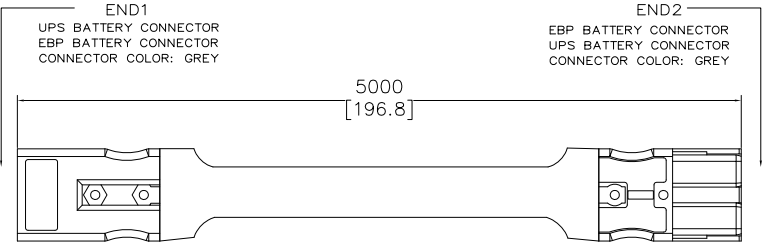

RIGHT VIEW
CONNECTOR COLOR: GREY



PIN	FUNCTION
1	BATTERY +
2	BATTERY -

SPECIFICATION

1. STANDARD:
CABLE TYPE:UL2587 90°C 600V
CABLE DIAMETER:2-CORE Ø20/1-CORE Ø8.5
6AWG, 2 CONDUCTORS
USE WITH UPS CAPACITY: 1/2/3kVA
WORKMANSHIP STANDARD: HARNESS TO BE MANUFACTURED TO
IPC/WHMA-A-620 CLASS 2 STANDARD
2. ADDITIONAL:
NONE
3. ACCESSORIES:
NONE

- NOTES:
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
2. 100% TESTING TO BE CARRIED OUT PRIOR TO SHIPPING: MUST BE TESTED FOR CONTINUITY, OPENS, SHORTS & WIRE MAPPING

IDENTIFICATION/PN TABLE:		
PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
UVP1T3VCBL	EBP POWER CABLE 24/36/48/72VDC 5 METER, FOR 1, 2, 3kVA VRLA UPS	3.7KG

				TITLE			
				BATTERY CABLE			
				UVP1T3VCBL			
				CUSTOMER DRAWING			
				PANDUIT			
				ALL TOLERANCES ARE +/-100mm UNLESS OTHERWISE SPECIFIED			
				N/A			
				THIRD ANGLE PROJECTION			
				UVP1T3VCBL-DC			
				SHT 1 OF 1			
QDA	06/13/2024	HQ	JOSD	RRG/MJD	RELEASE TO PRODUCTION	005385	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	
				06/13/2024			
				VARIOUS			