





N/A



EPO PLUG WITH SHORTING WIRE QTY: (1) (INSTALLED)

APPLICABLE FOR USE WITH THIS PRODUCT

PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
U02S14L	UPS, 2kVA, 2U, 120V, SINGLE PHASE, LITHIUM-ION, DOUBLE-CONVERSION ON-LINE POWER PROTECTION	20.35
U02N14L	UPS, 2kVA, 2U, 120V, SINGLE PHASE, LITHIUM-ION, DOUBLE-CONVERSION ON-LINE POWER PROTECTION WITH INTELLIGENT NETWORK CARD	23.55

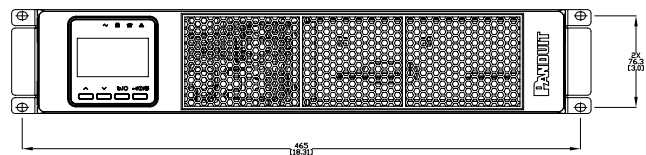


					PO NUMBER: U02514L/U02N14L/00 SKETCH PART NAME: U02514L/U02N14L-DC/00 UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: MM (IN) MATERIAL: N/A FINISH: N/A PART NUMBER: U02N14L-DC	
DOA	12/30/2024	D.L.	MIRVA /GJM	MJD/RRRD	RELEASE TO PRODUCTION	U02N14L
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
2						1

PANDUIT
18900 PANDUIT DRIVE, 60487, USA
WWW.PANDUIT.COM



UNINTERRUPTIBLE POWER SYSTEMS
MODEL NUMBER: U02N14L
INPUT: 100-125 VAC | 50/60Hz | 16.0 A Max. | 1PH+N+PE
BATTERY INPUT: ≤ 84 V $\equiv$ 45 A
BATTERY CAPACITY/ENERGY: 76.8 V / 6 Ah / 460.8 Wh
OUTPUT: 100/110/115/120/125 VAC | 50/60Hz | 1PH+N+PE
2000VA/1800W, 16.0A (@125VAC input)
2000VA/1800W, 16.7A (@120VAC input)
1910VA/1710W, 16.7A (@115VAC input)
1830VA/1630W, 16.7A (@110VAC input)
1600VA/1380W, 16.0A (@100VAC input)
Icc: 3 kA
PROHIBIDO SU USO EN EXTERIORES
MADE IN xxx
HECHO EN xxx

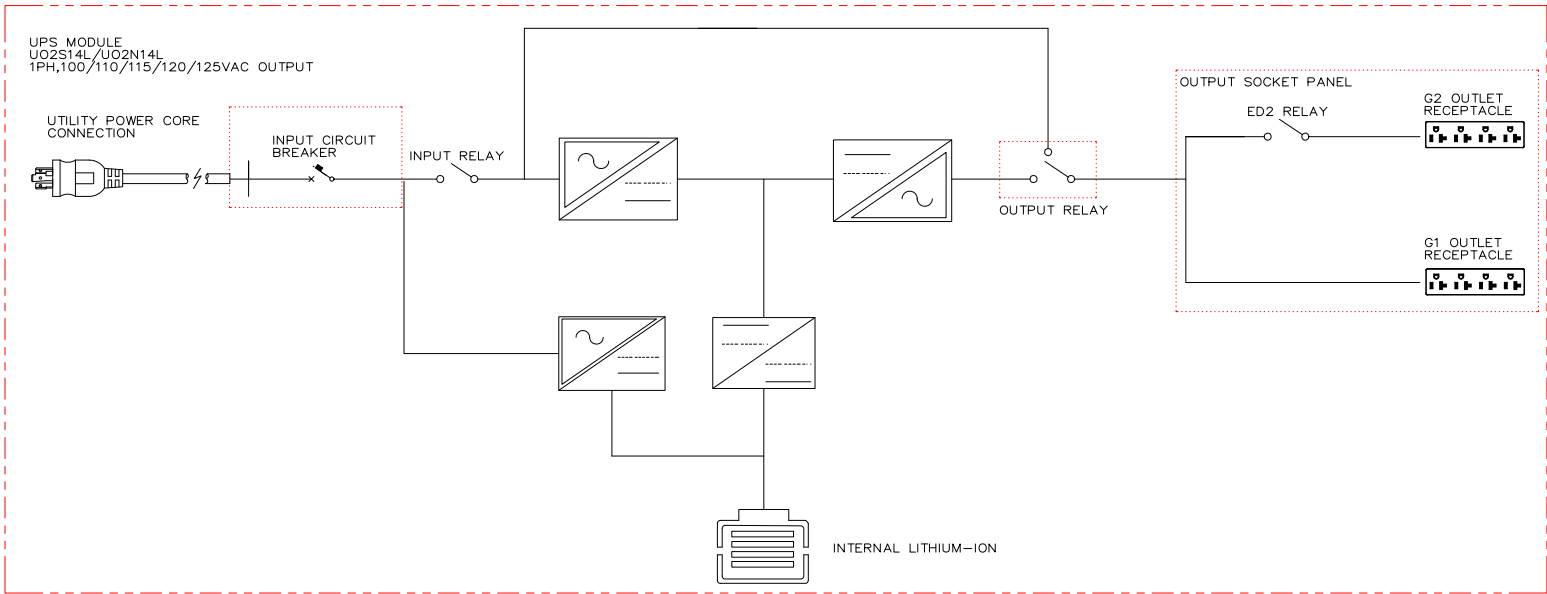

LEGEND			
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	CIRCUIT BREAKER		AC-DC CONVERTER
	RELAY		DC-AC CONVERTER (INVERTER)
	DC-DC CONVERTER		AC-DC CHARGE
			BATTERY

				TYPE UPS U02S14L/U02N14L CUSTOMER DRAWING			
PART NUMBER NAME U02S14L/U02N14L/00				DRAWN BY U02S14L/U02N14L-DC/00A			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES AND FIT (IN)				EXTERNAL N/A			
THIRD ANGLE PROJECTION				DRAWN NAME U02N14L-DC			
REV DATE BY CHK APR DESCRIPTION ECN				PRINTED DATE 12/30/2024			
SEE SHEET 1 FOR CHANGES				SHEET VARIOUS			
				SHT 2 OF 2			