THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

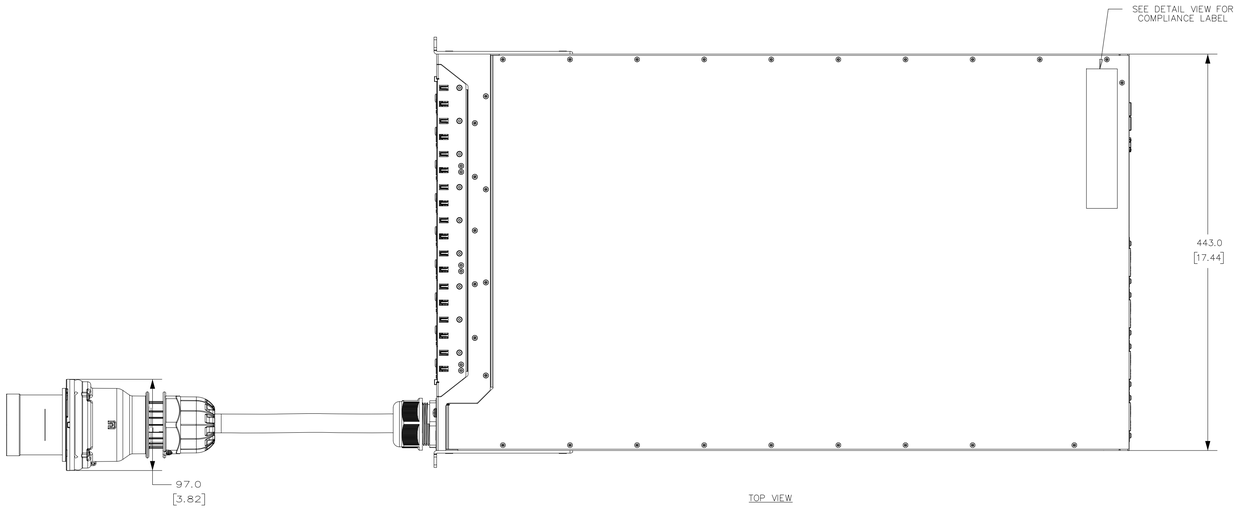

TOP VIEW

SPECIFICATION

1. STANDARD:

UNIT TYPE:	MSPO
ORIENTATION:	HORIZONTAL, 2U
OUTLET QTY & TYPE:	(18)C13/C15/C19/C21
INPUT VOLTAGE:	200–240/346–415VAC
INPUT CURRENT:	60A(48A DERATED)/63A
BREAKER QTY & TYPE:	(12) 20AMP, SINGLE–POLE
INPUT PHASE:	THREE–PHASE WYE, L–N
RATED POWER:	34.6/43.5KVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 60/63A (IP44)

2. ADDITIONAL:
   CORD TYPE: 5W 6AWG SOOW & 16MM² H07RN–F

3. ACCESSORIES:
   MOUNTING BRACKET HARDWARE KIT
   PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (–XX)	SHIPPING WEIGHT (KG)
E18G03L	EL2P MSPO PDU, 60/63 AMP, (18)C13/C15/C19/C21, IEC 60309 3P+N+E 6H 60A/63A (IP44)	3000 +178/–89 [118.1 +7/–3.5]	BLACK (RAL 9005)	TBD

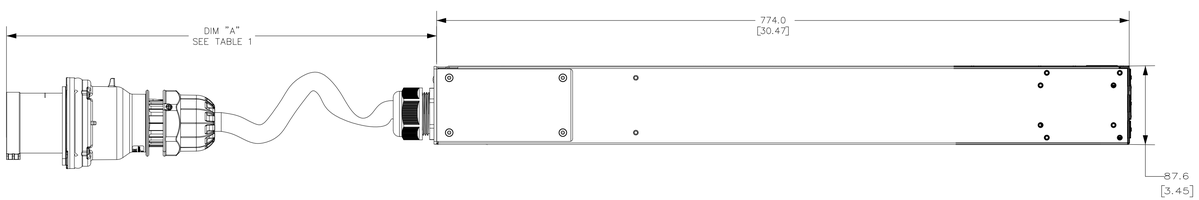

SIDE VIEW

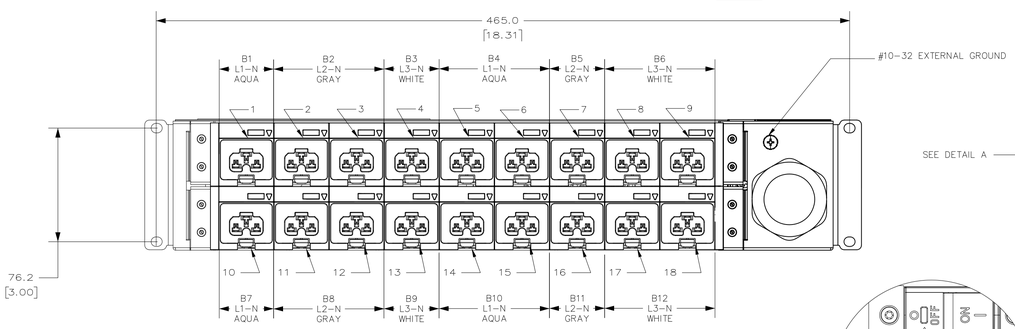

REAR VIEW

SCALE 1:2

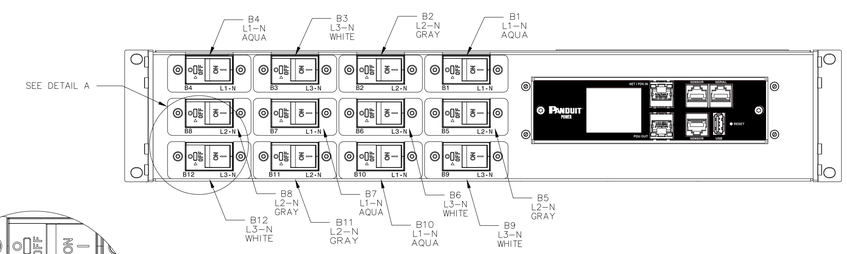

FRONT VIEW

SCALE 1:2



DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 12X

INPUT PLUG FRONT VIEW



COMPLIANCE LABEL VIEW

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	07/31/2025	CHF	CSH	MJD	RELEASE FOR DV BUILD	E18G03L

TITLE: E18G03L

CUSTOMER DRAWING

ITEM REVISION NAME: E18G03L/00

DATASET FILE NAME: E18G03L-DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]
.XX±.01 [.X±.03]
.XXX±.005 [.XX±.01]
.XXXX±.0005 [.XXX±.005]
ANGLES ±1°
THIRD ANGLE PROJECTION

MATERIAL: NOT APPLICABLE

DRAWING NUMBER: E18G03L-DC

DRAWN BY	DATE	CHK	SCALE	SIZE
CHF	07/31/2025	CSH	3:10	D

SHT 1 OF 1

D101G000/A8