




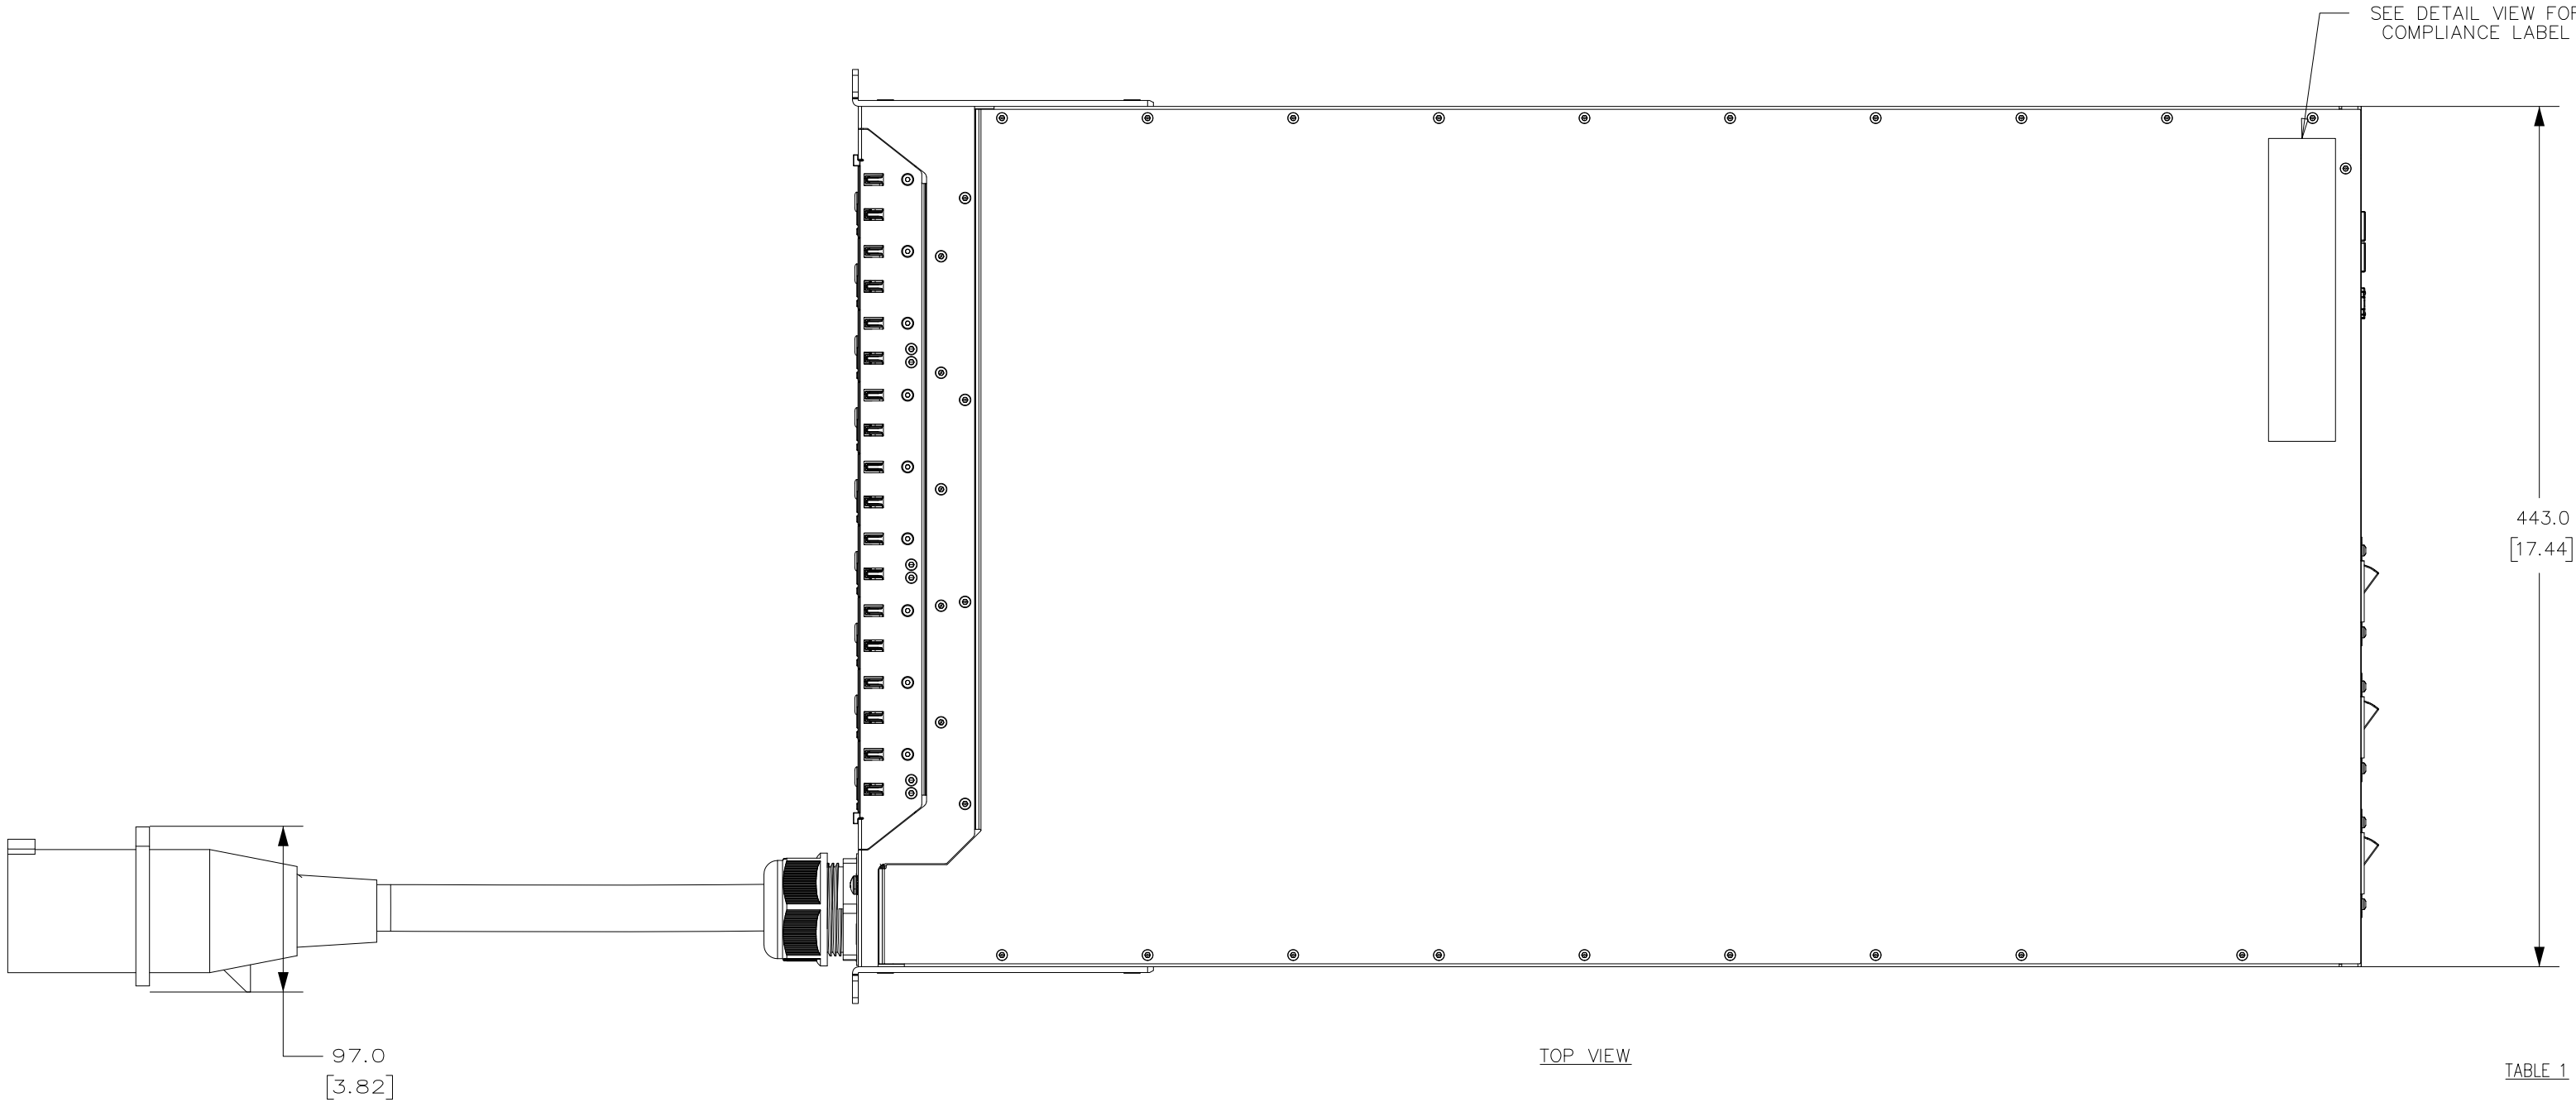


TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E18G01L	EL2P MSPO PDU, 60 AMP, (18)C13/C15/C19/C21, IEC 60309 3P+E 9H 60A (IP44)	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD

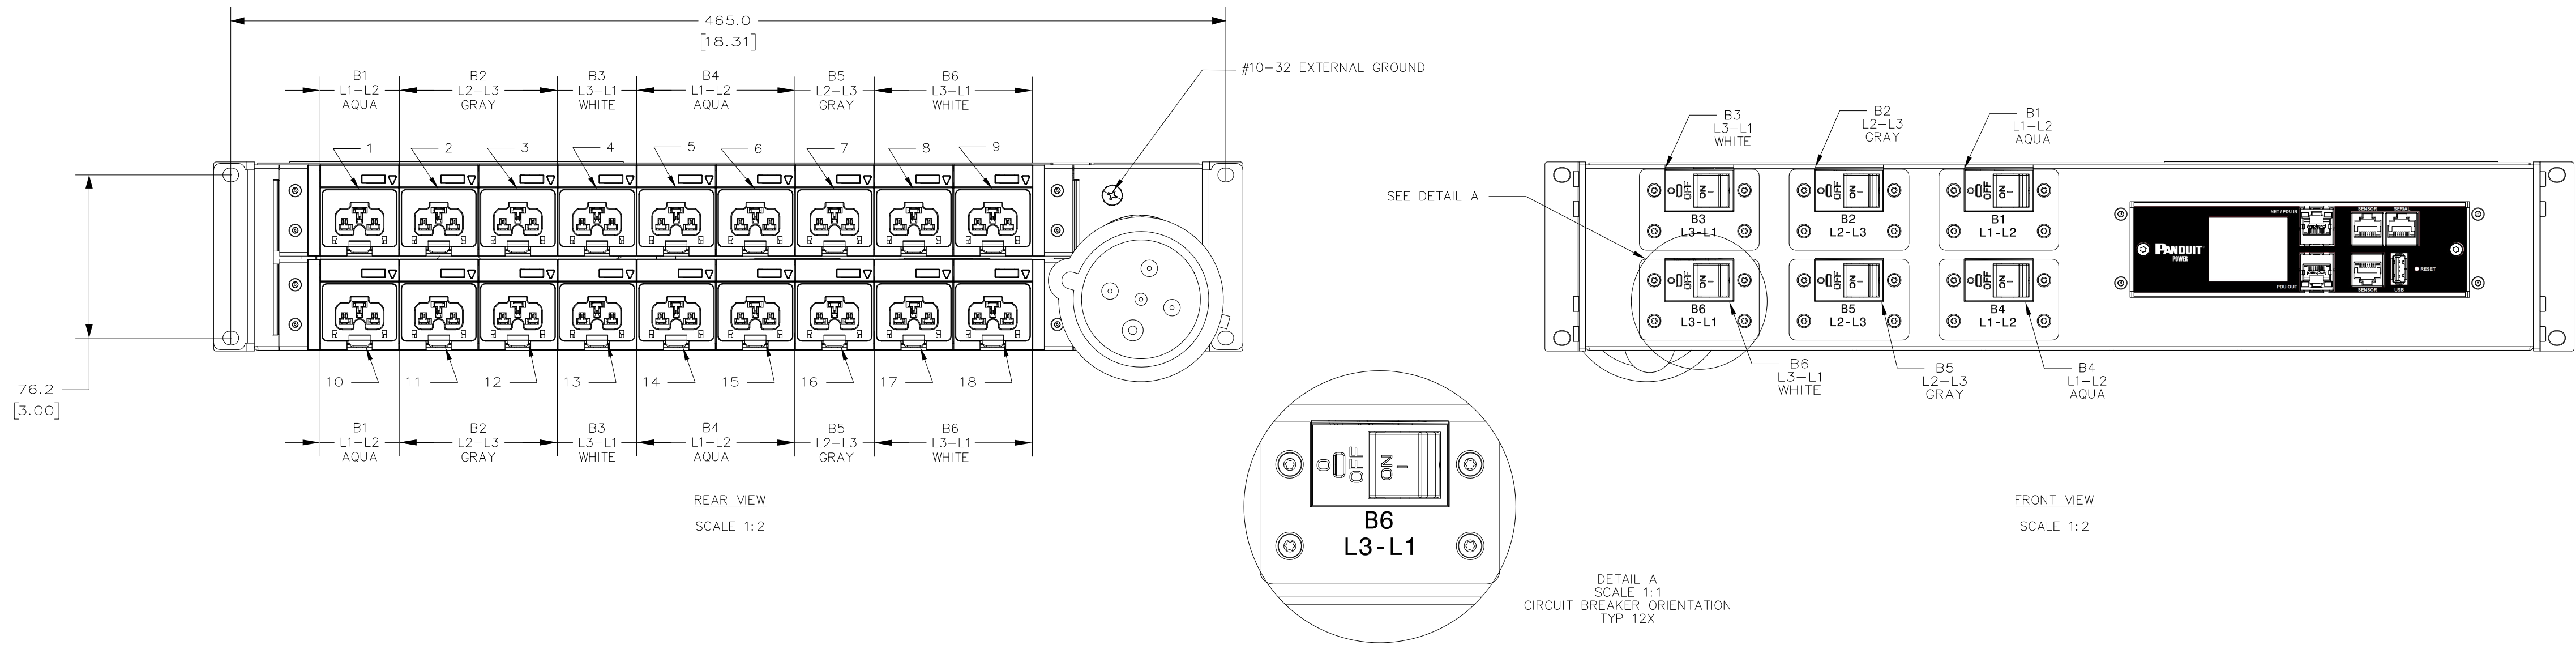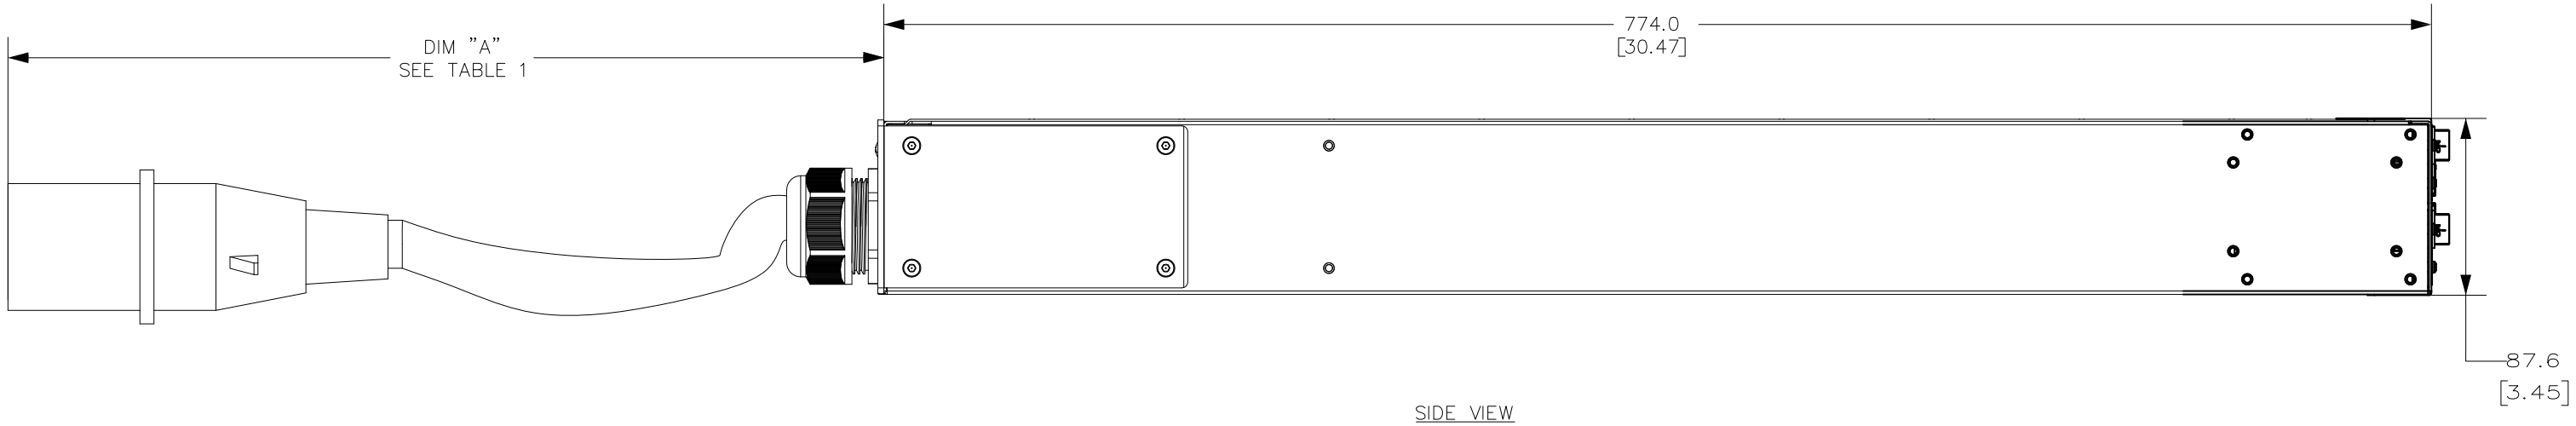

INPUT PLUG FRONT VIEW

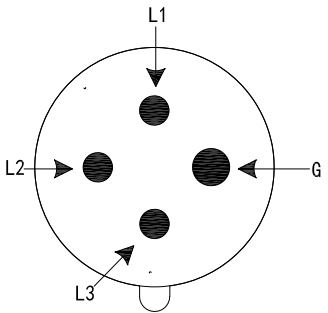

COMPLIANCE LABEL VIEW

PANDUIT
18900 Panduit Drive, 60487, USA
www.panduit.com

Power Distribution Unit / Unidad de distribución de Energía

62368-1

Model/Modelo: S2-GD048DV
Input/Entrada: 200-240VAC, DELTA, 3Ø, 50/60Hz, 48A
Output per Outlet/Salida por Receptáculo:
C19; 200-240VAC, 16A per outlet
48A Total

CAN ICES-003(A)/NMB-003(A)
Exclusivo para uso interior.
Prohibido su uso en exteriores.
No modificar ni reparar.
Revisarla periódicamente.
Desconectarla cuando no se utilice.
No sobrepasar la corriente indicada.
Conectar la clavija totalmente.

UPC: XXXXXXXXXX
SKU: E18G01L

SN: XXXXXXXXXX
MAC: XXXXXXXXXX

Made in / Hecho en TAIWAN

SPECIFICATION

- STANDARD:
 - UNIT TYPE: MSPO
 - ORIENTATION: HORIZONTAL, 2U
 - OUTLET QTY & TYPE: (18)C13/C15/C19/C21
 - INPUT VOLTAGE: 200~240 VAC
 - INPUT CURRENT: 60A (48A DERATED)
 - BREAKER QTY & TYPE: (6) 20AMP, DOUBBLUE-POLE
 - INPUT PHASE: THREE-PHASE DELTA, L-L
 - RATED POWER: 17.3KVA
 - INPUT PLUG: IEC 60309 3P+E 9H 60A (IP44)
- ADDITIONAL:
 - CORD TYPE: 4W 6AWG SOOW
- ACCESSORIES:
 - MOUNTING BRACKET HARDWARE KIT
 - PRODUCT SAFETY WARNING SHEET

NOTES

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]

PRODUCT SPEC SPS-EDI-1000469		PACKAGE SPEC PPS-1694	
PART NUMBER SEE TABLE		WORK INSTRUCTION AM-710	
INSPECTION INSTRUCTION N/A		TIME & CONTROL PLAN NUMBER 952	
TITLE E18G01L			
CUSTOMER DRAWING			
ITEM REVISION NAME E18G01L/00			
DATASET FILE NAME E18G01L-DC/00A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		MATERIAL: NOT APPLICABLE	
 THIRD ANGLE PROJECTION		DRAWING NUMBER: E18G01L-DC	
DRW BY CHF	DATE 07/28/2025	DRK CSH	SCALE 1:1
SHT 1 OF 1			SIZE D