





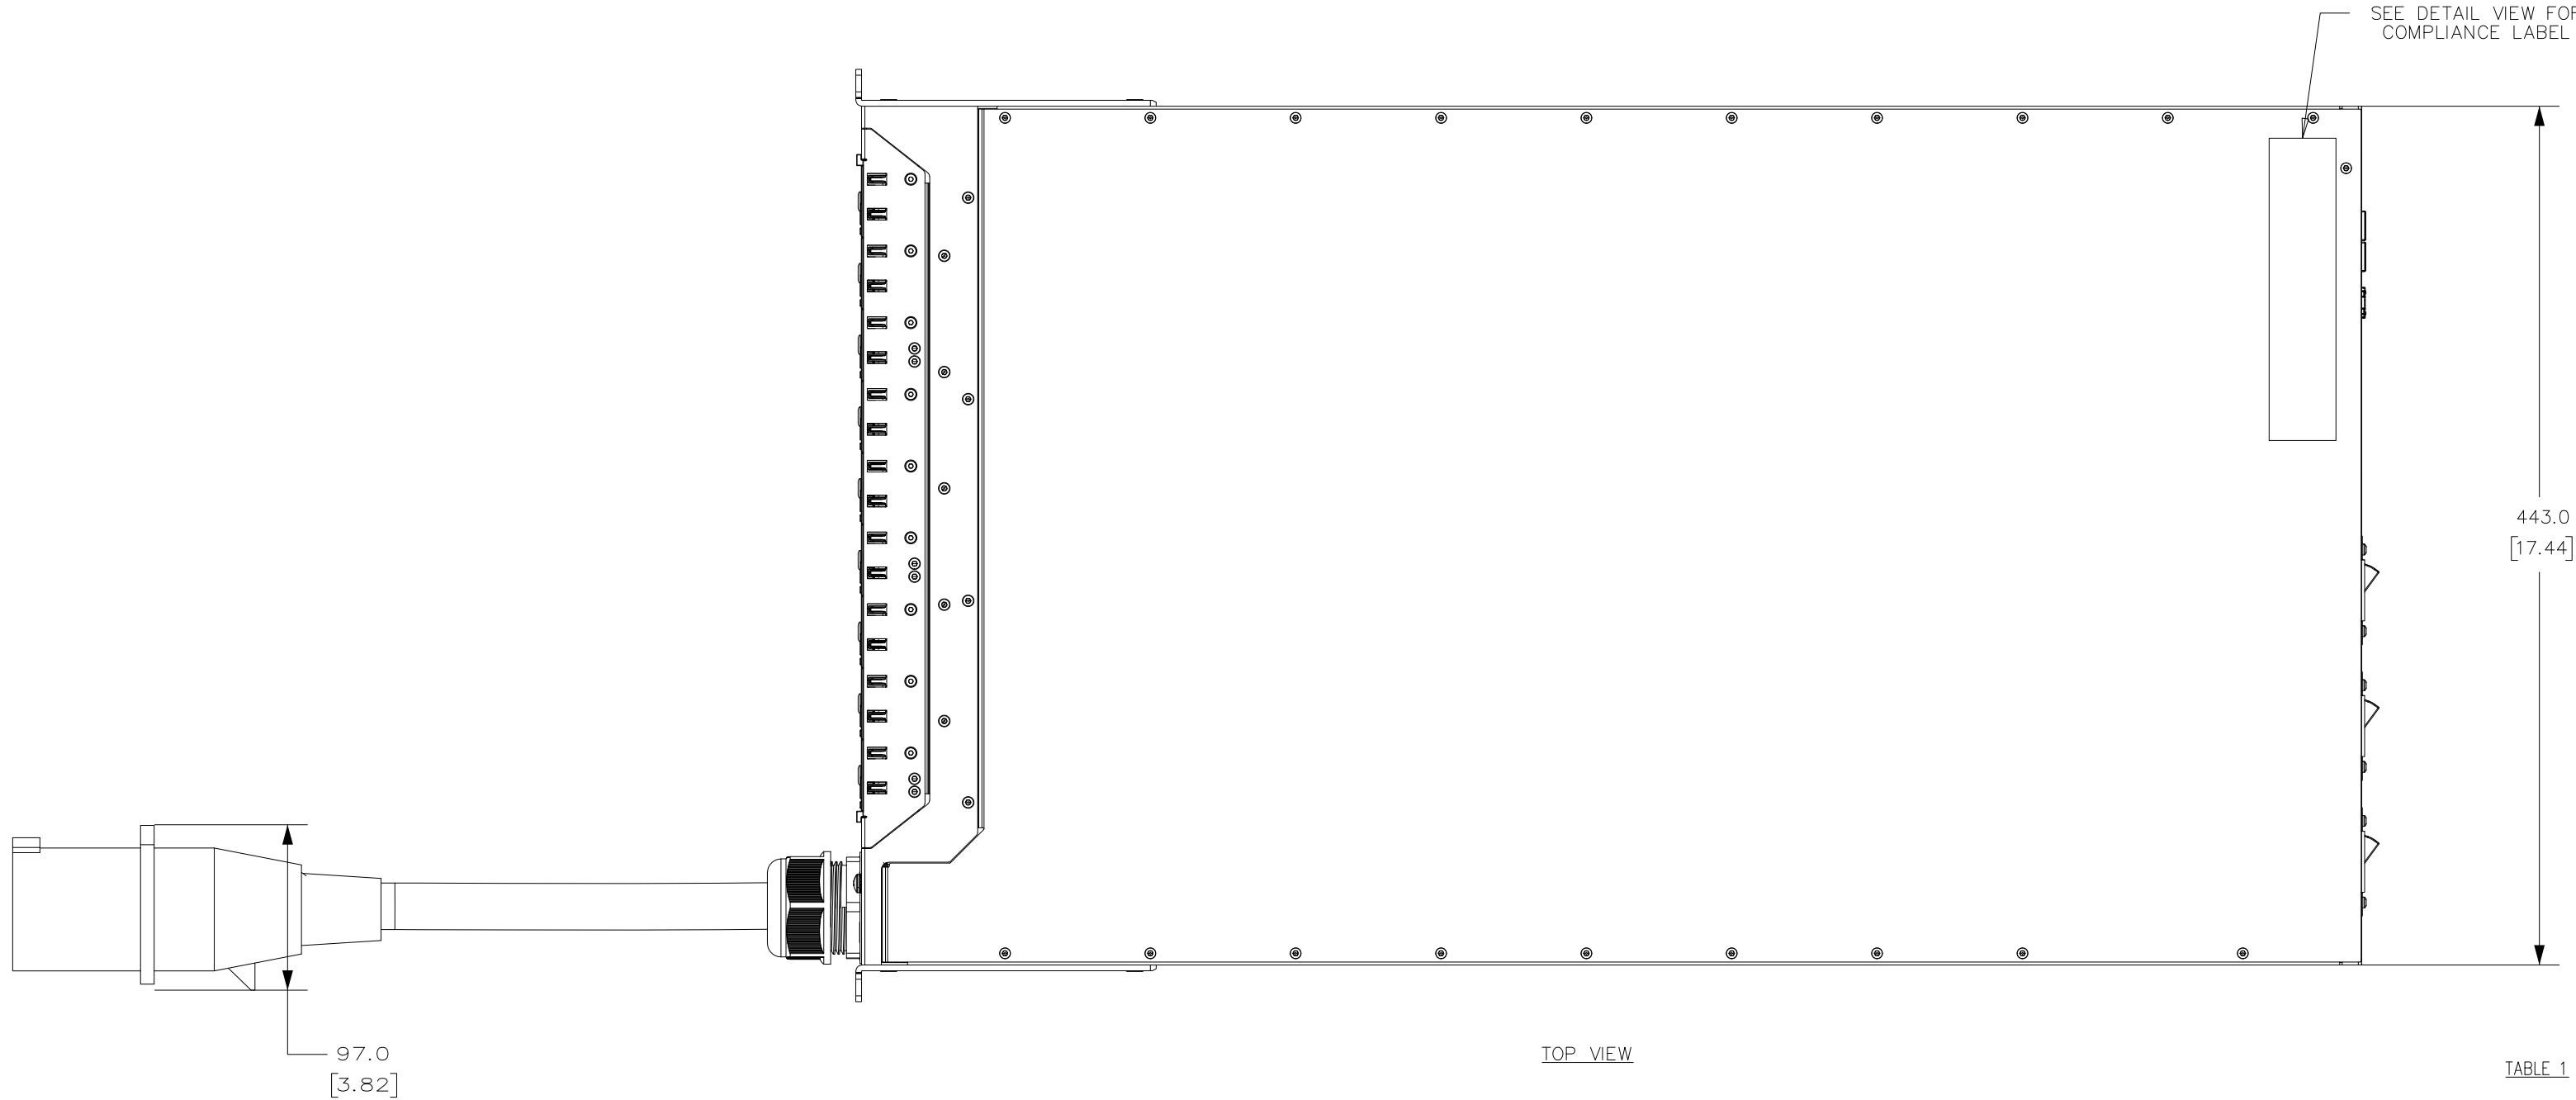


TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E18D01L	EL2P MI PDU, 60 AMP, (18)C13/C15/C19/C21, IEC 60309 3P+E 9H 60A (IP44)	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD

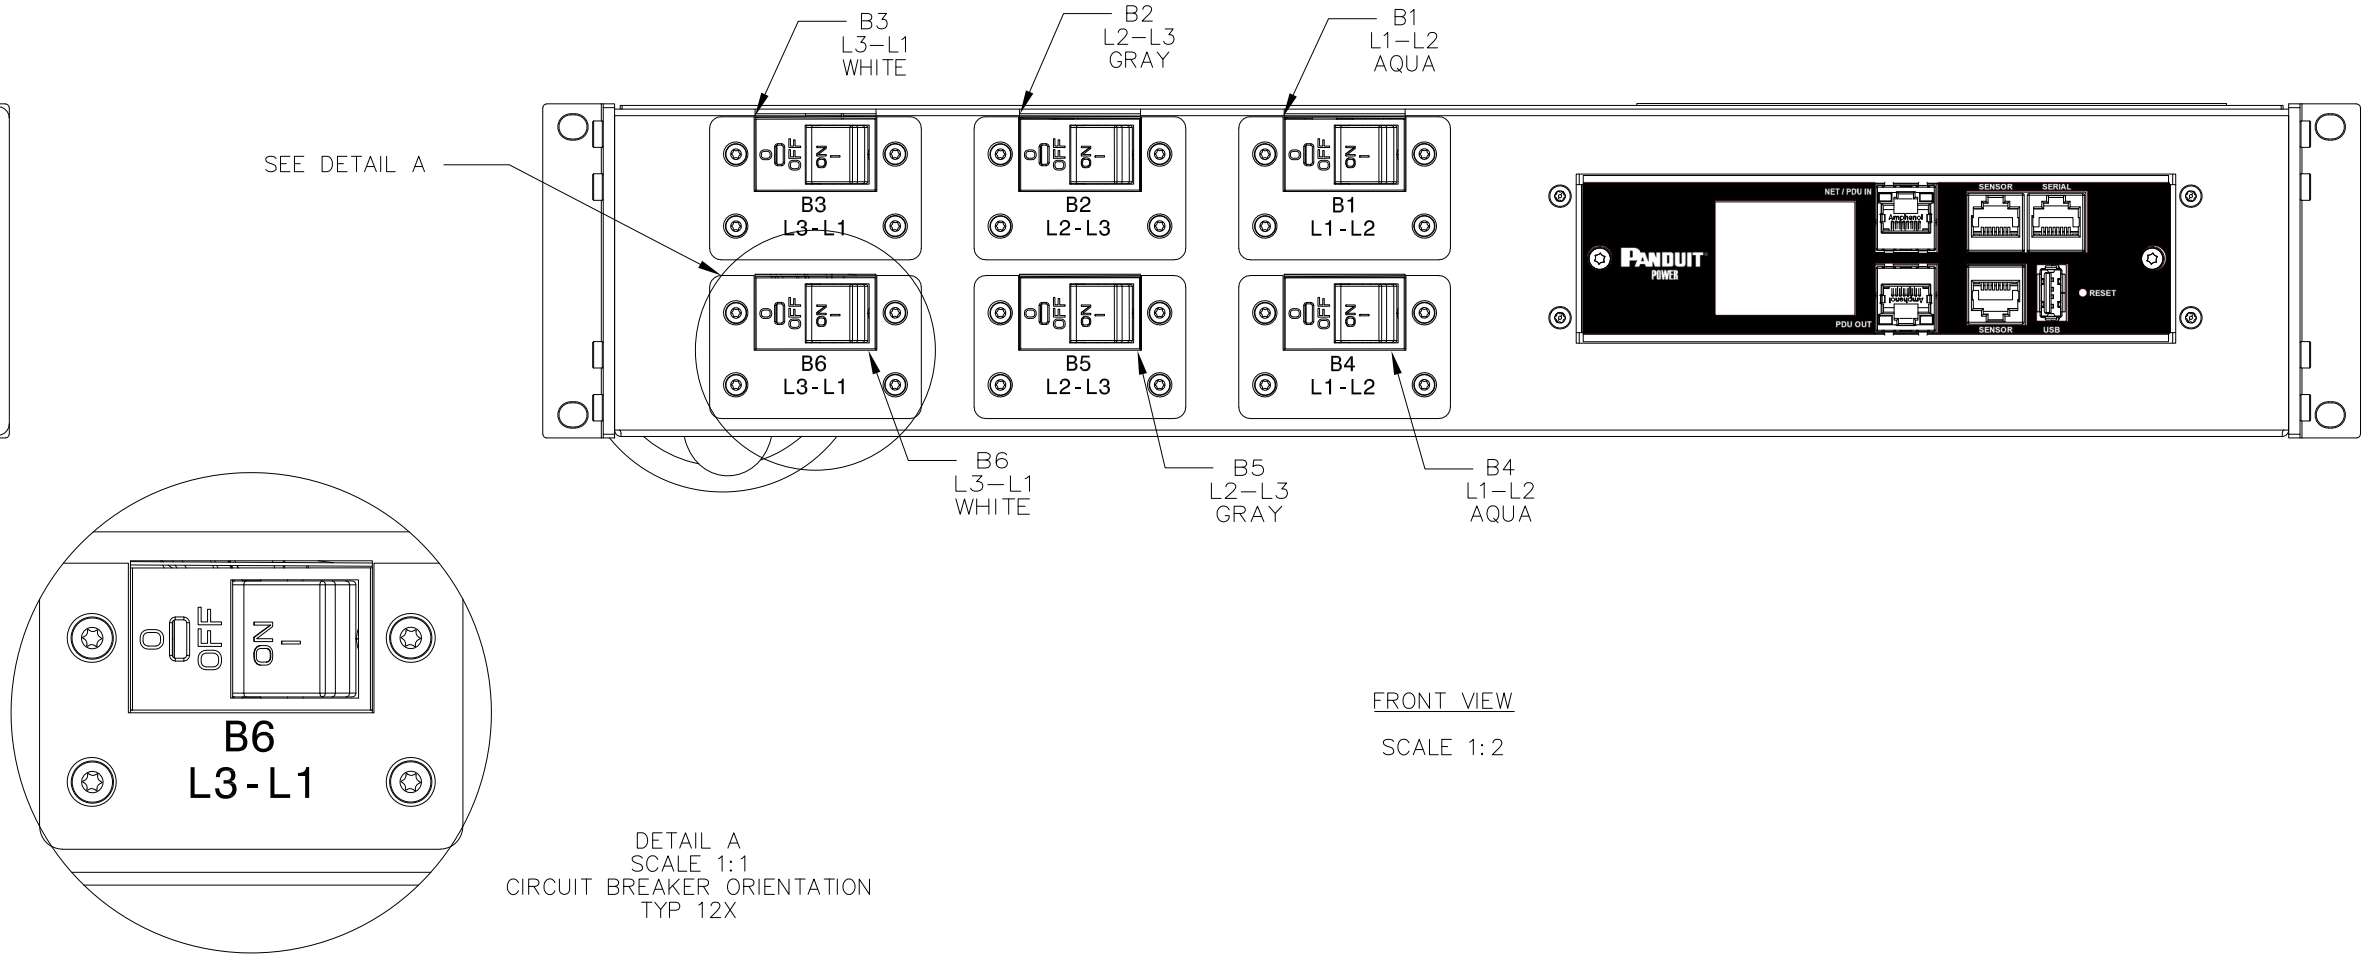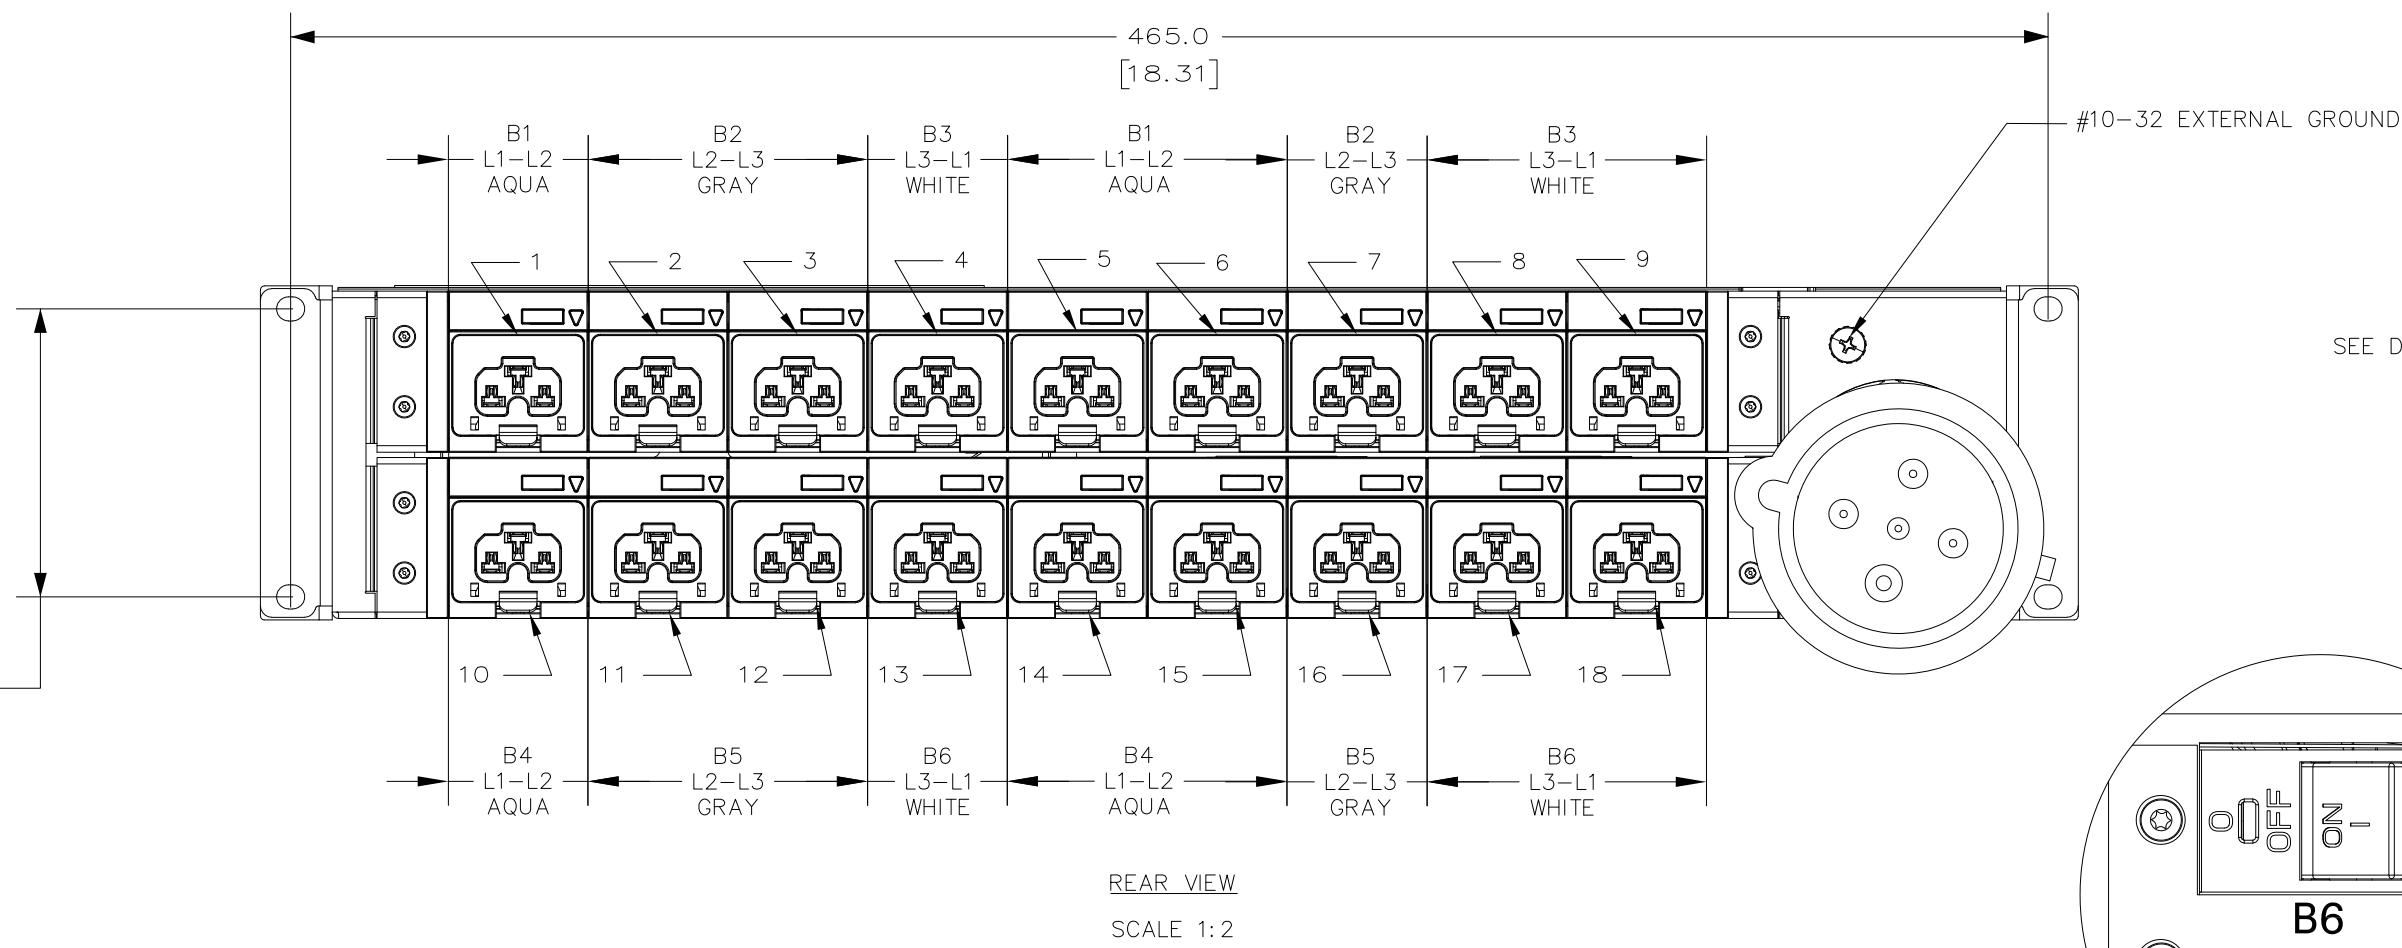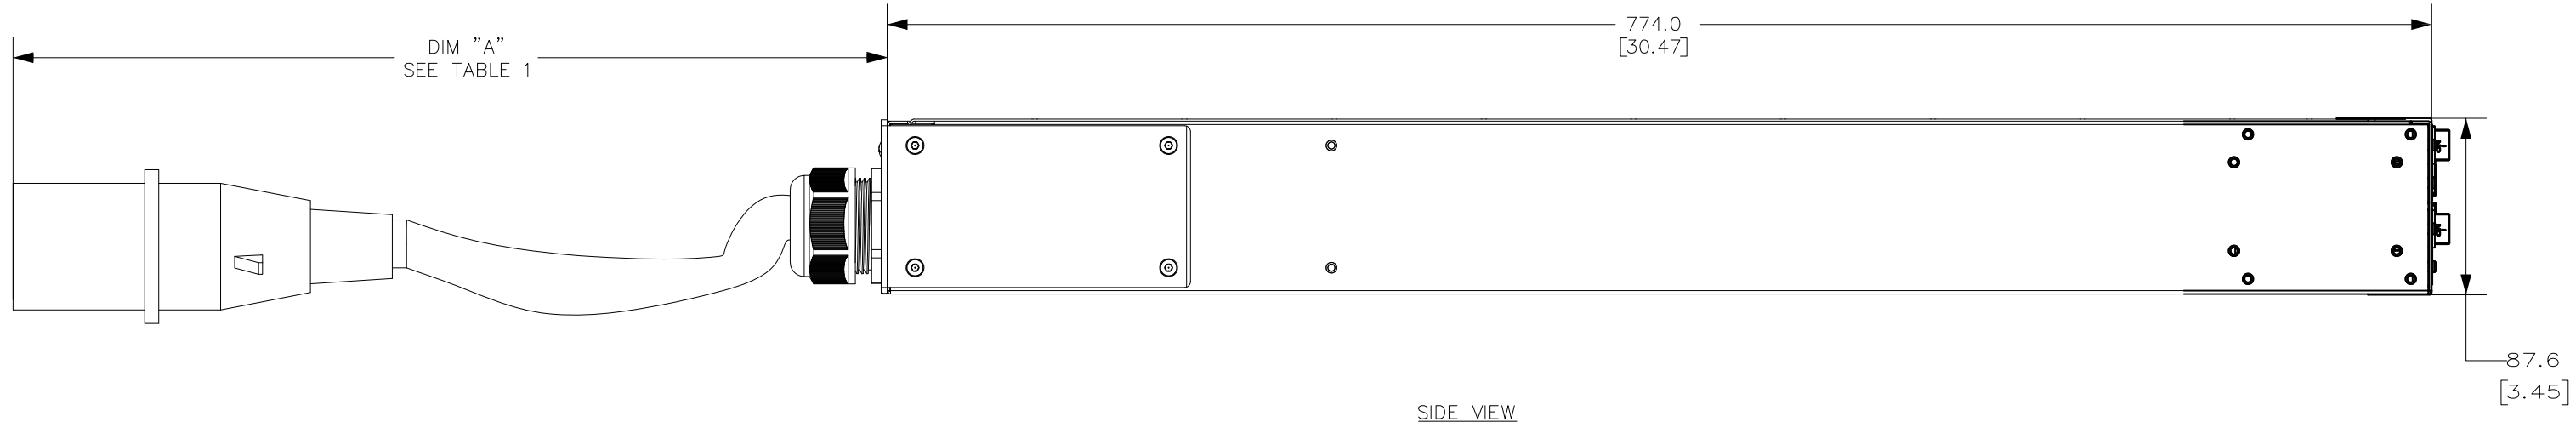

INPUT PLUG FRONT VIEW

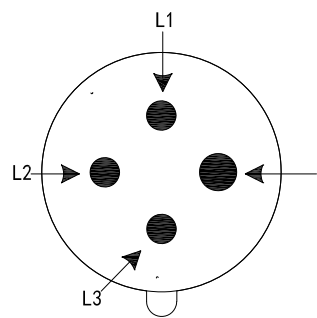

COMPLIANCE LABEL VIEW

PANDUIT
18900 Panduit Drive, 60487, USA
www.panduit.com

Model/Modelo: S2-DD048DV
Input/Entrada: 200-240VAC, DELTA, 3Ø, 50/60Hz, 48A
Output per Outlet/Salida por Receptáculo:
C19; 200-240VAC, 16A per outlet
48A Total

Power Distribution Unit / Unidad de distribución de Energía

CAN ICES-003(A)/NMB-003(A)
Exclusivo para uso interior.
Prohibido su uso en exteriores.
No modificar ni reparar.
Revisarla periodicamente.
Desconectarla cuando no se utilice.
No sobrepasar la corriente indicada.
Conectar la clavija totalmente.

UPC: xxxxxxxxxx
SKU: E18D01L

SN: xxxxxxxxxx
MAC: xxxxxxxxxx

Made in / Hecho en TAIWAN

SPECIFICATION

- STANDARD:
 - UNIT TYPE: MI
 - ORIENTATION: HORIZONTAL, 2U
 - OUTLET QTY & TYPE: (18)C13/C15/C19/C21
 - INPUT VOLTAGE: 200-240 VAC
 - INPUT CURRENT: 60A (48A DERATED)
 - BREAKER QTY & TYPE: (6) 20AMP, DOUBLBLUE-POLE
 - INPUT PHASE: THREE-PHASE DELTA, L-L
 - RATED POWER: 17.3KVA
 - INPUT PLUG: IEC 60309 3P+E 9H 60A (IP44)
- ADDITIONAL:
 - CORD TYPE: 4W 6AWG SOOW
- ACCESSORIES:
 - MOUNTING BRACKET HARDWARE KIT
 - PRODUCT SAFETY WARNING SHEET

NOTES

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]

00A	07/28/2025	CHF	CSH	MJD	RELEASE FOR DV BUILD	E18D01L
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

DRAWN BY DATE	CHK	SCALE	THIRD ANGLE PROJECTION	DRAWING NUMBER	SIZE
CHF 07/28/2025	CSH	3:10		SHT 1 OF 2	D