


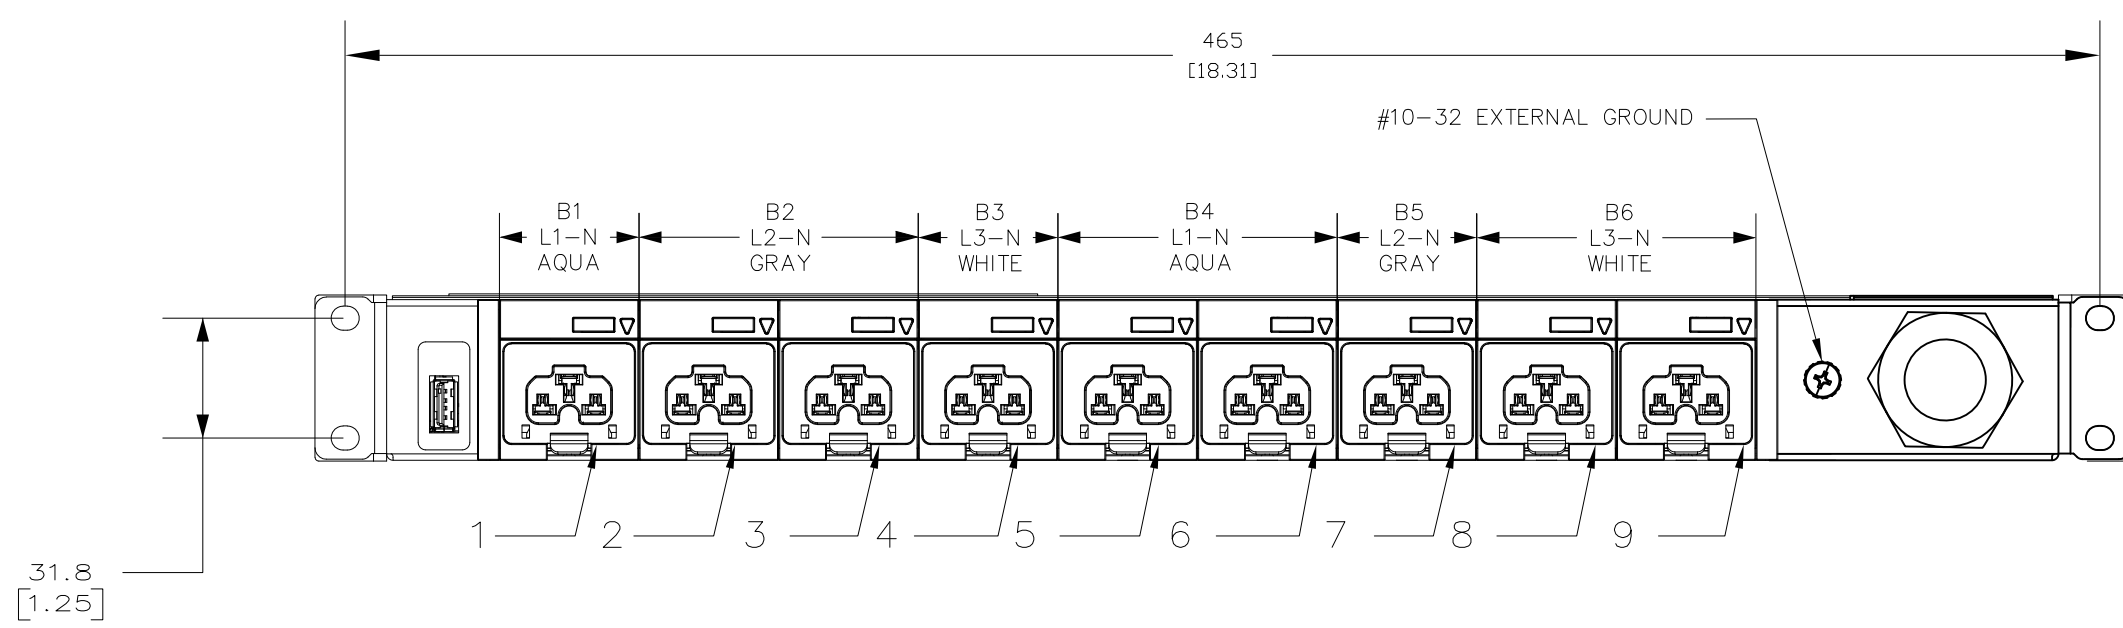
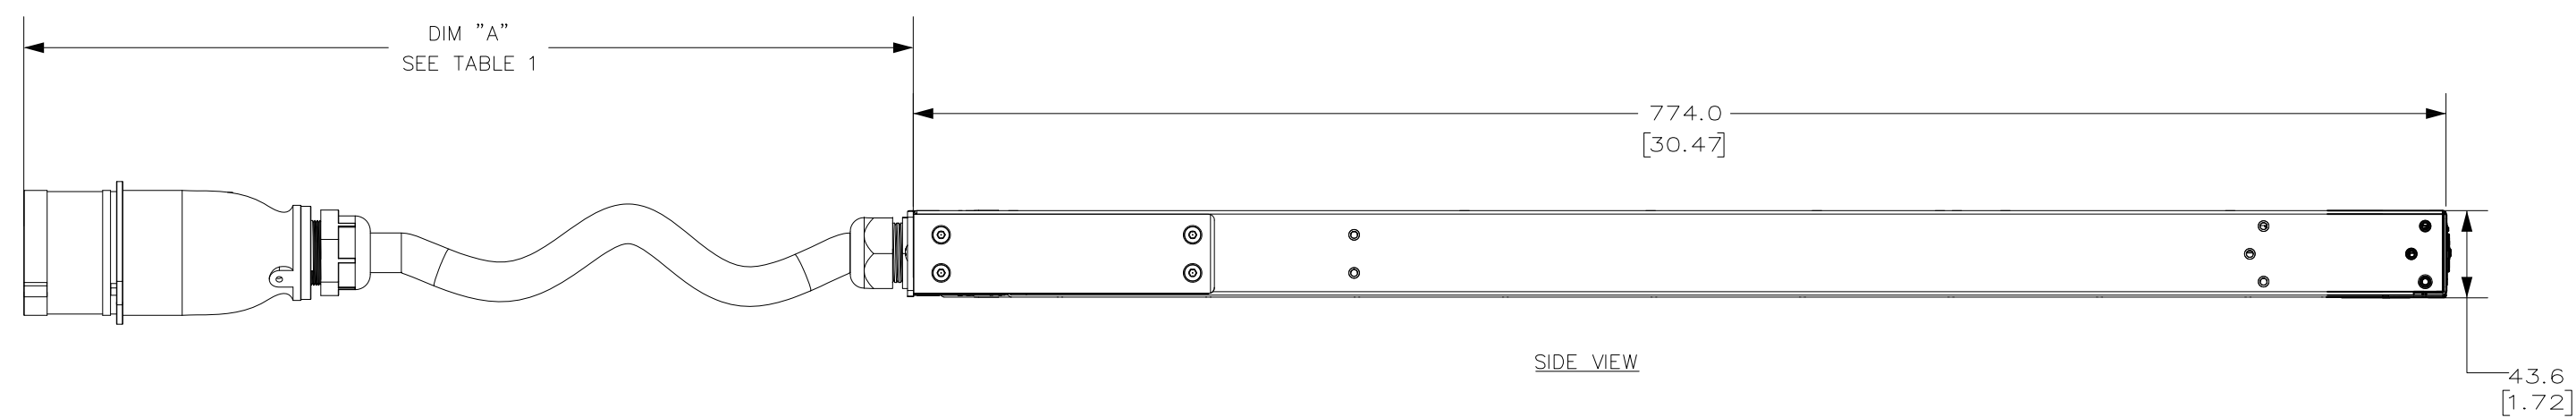


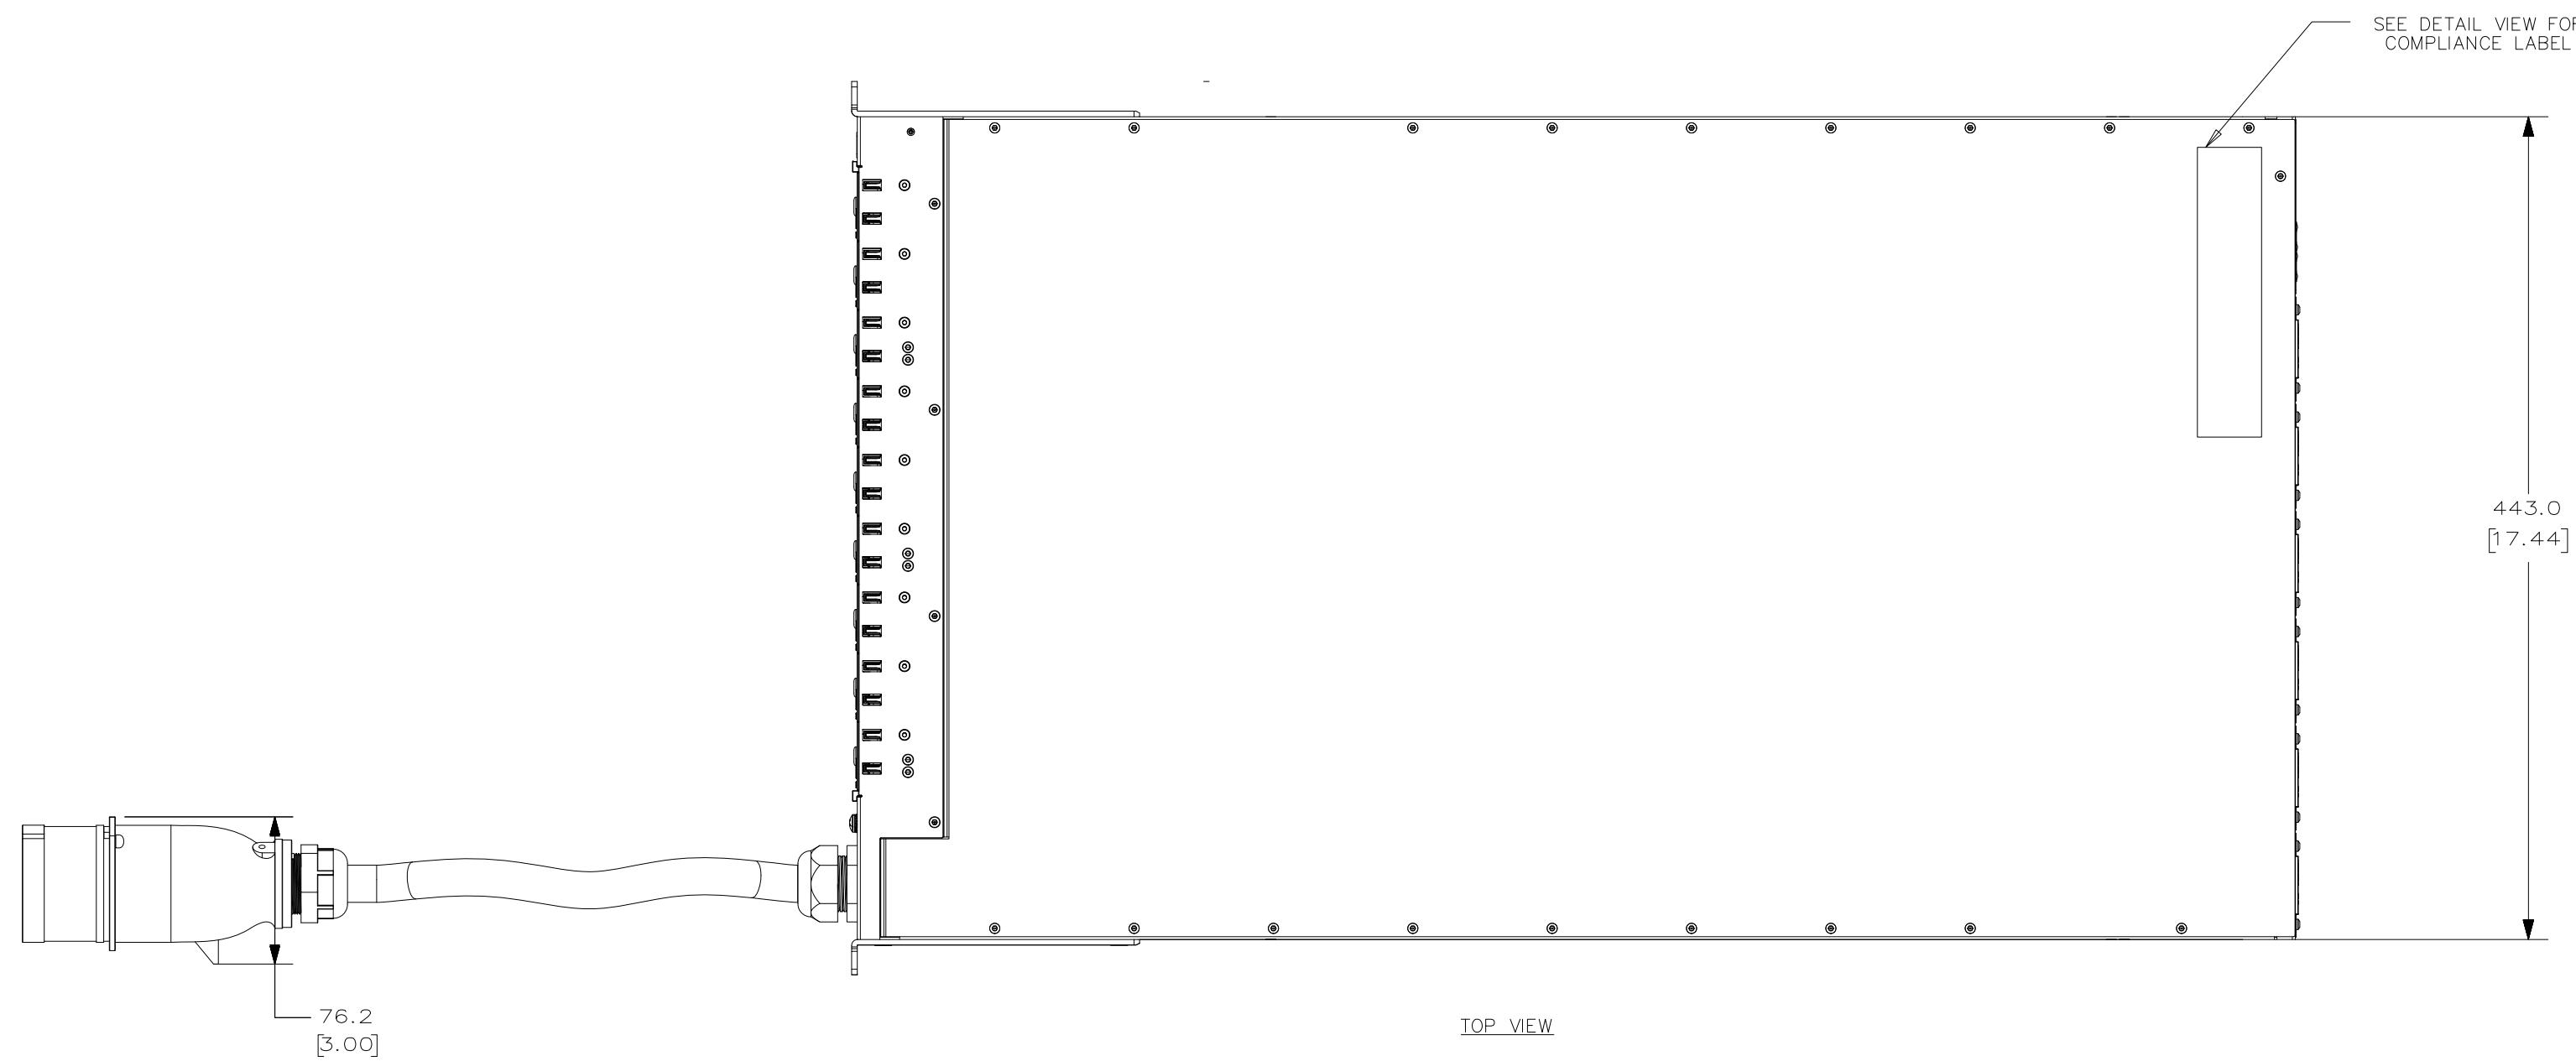



REAR VIEW
SCALE 1:2

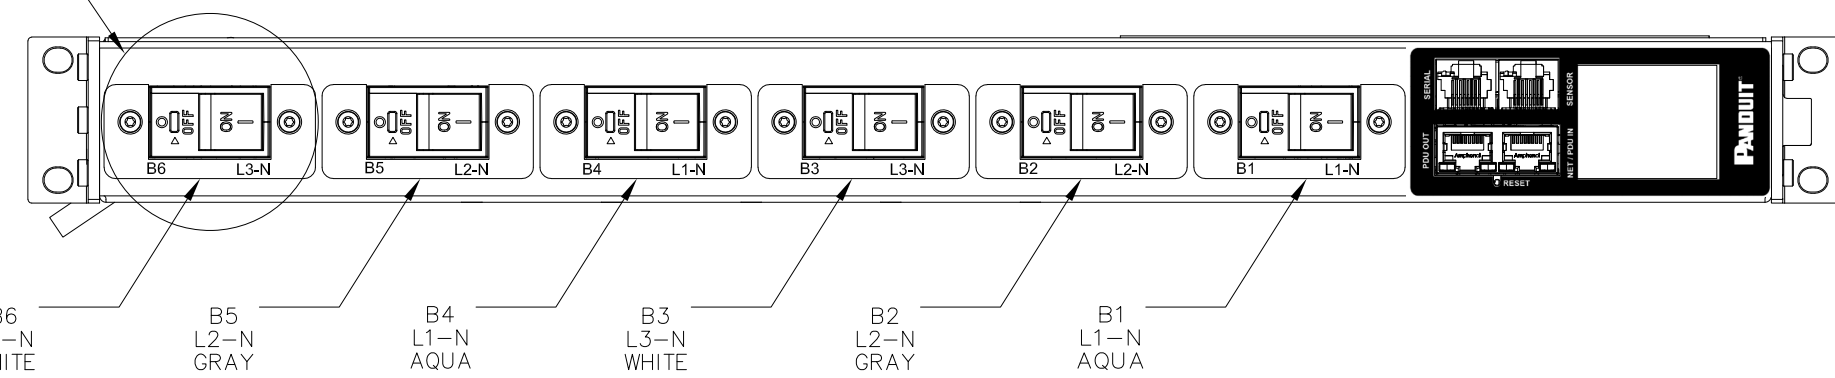

FRONT VIEW
SCALE 1:2

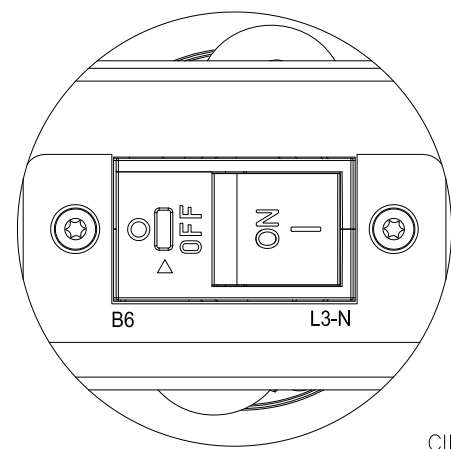

DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 6X



SPECIFICATION

1. STANDARD:
- | | |
|---------------------|-----------------------------------|
| UNIT TYPE: | MSPO |
| ORIENTATION: | HORIZONTAL, 1U |
| OUTLET QTY & TYPE: | (9)C13/C15/C19/C21 |
| INPUT VOLTAGE: | 200-240/346-415VAC |
| INPUT CURRENT: | 30A(24A DERATED)/32A |
| BREAKER QTY & TYPE: | (6) 20AMP, SINGLE-POLE |
| INPUT PHASE: | THREE-PHASE WYE, L-N |
| RATED POWER: | 17.3/22.0KVA |
| INPUT PLUG: | IEC 60309 3P+N+E 6H 30A/32A(IP44) |
2. ADDITIONAL:
- CORD TYPE: 5W 10AWG SOOW & 6MM² H07RN-F
3. ACCESSORIES:
- MOUNTING BRACKET HARDWARE KIT
PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E09G02L	EL2P MSPO PDU, 30/32 AMP, (9)C13/C15/C19/C21, IEC 60309 3P+N+E 6H 30A/32A(IP44)	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD