




REAR VIEW

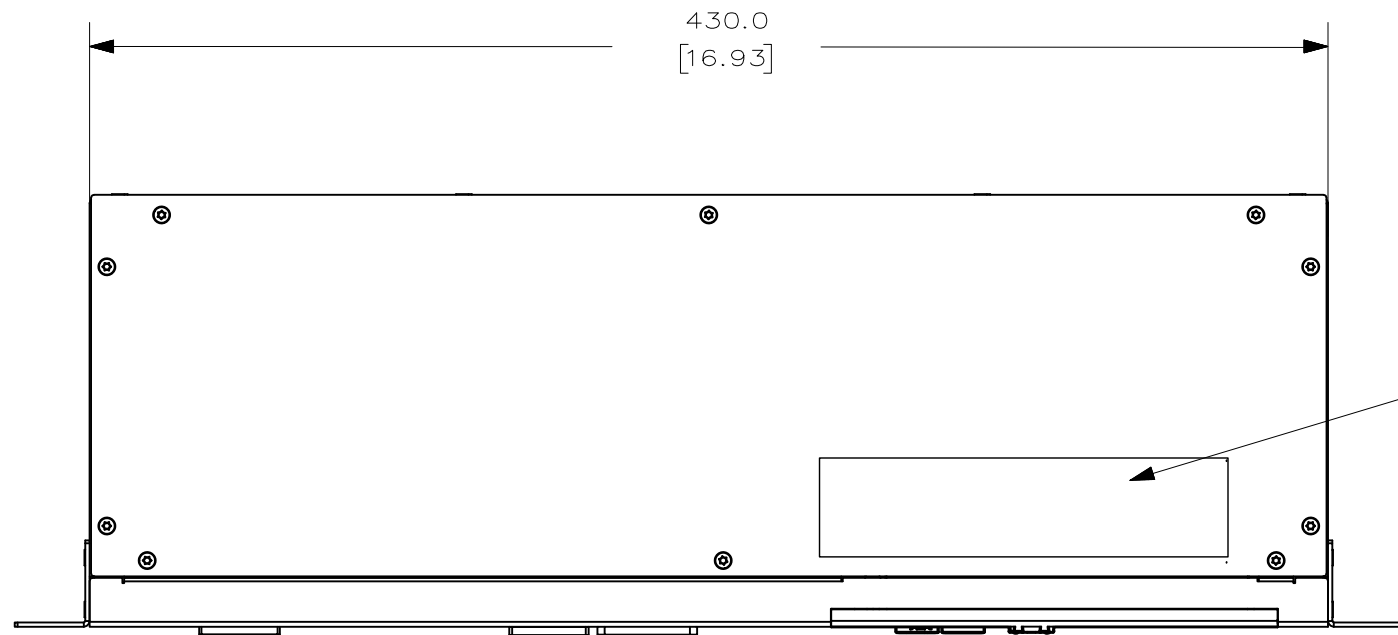


TOP VIEW

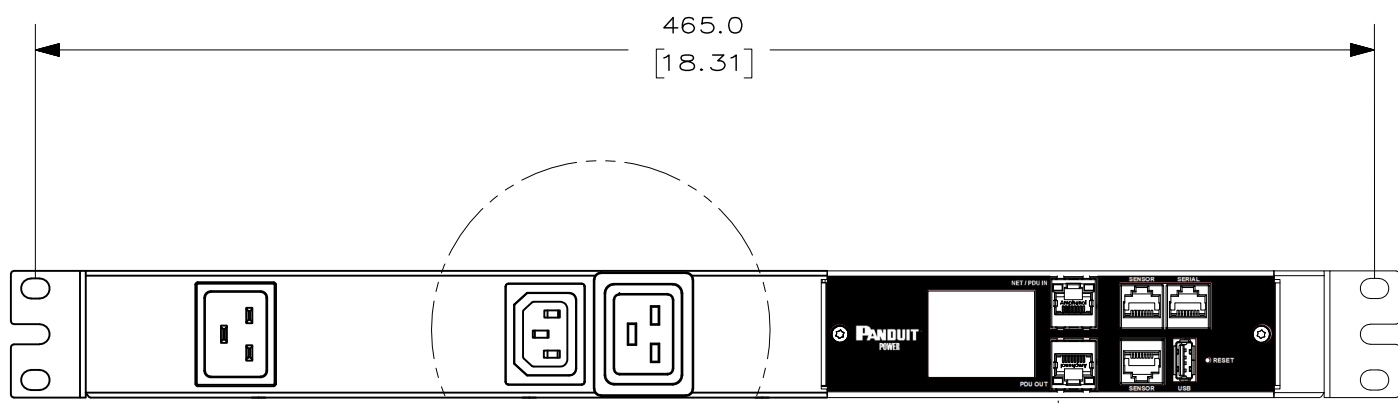

FRONT VIEW

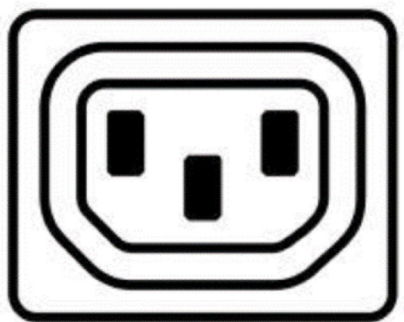


RECEPTACLE
IEC 60320 C13 OUTLET
10A, 250V MAX RATED OUTPUT

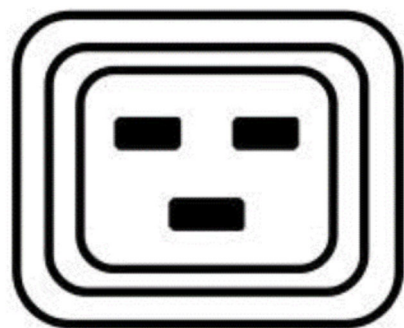

RECEPTACLE
IEC 60320 C19 OUTLET
16A, 250V MAX RATED OUTPUT

DETAIL A

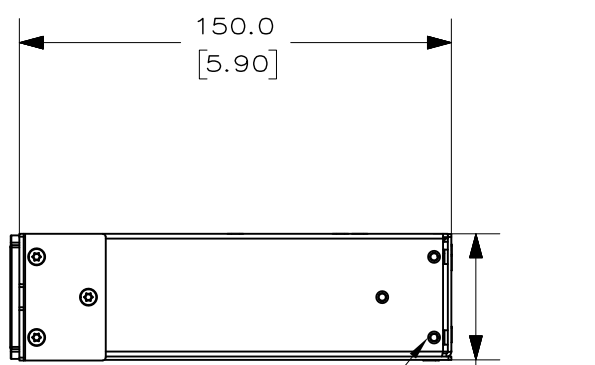

RIGHT VIEW

SPECIFICATION

- STANDARD:
UNIT TYPE: MI
ORIENTATION: HORIZONTAL, 1U
OUTLET QTY & TYPE: (1)C13, (1)C19
INPUT VOLTAGE: 100-120/200-240VAC
INPUT CURRENT: 20A (16A DERATED)/16A
BREAKER QTY & TYPE: NA
INPUT PHASE: SINGLE PHASE, L-L OR L-N
RATED POWER: 3.3/3.7 KVA
INPUT PLUG: C20
- ADDITIONAL:
MOUNTING EARS CAN BE INSTALLED ON REAR SIDE
- ACCESSORIES:
PRODUCT SAFETY WARNING SHEET
IEC60320 C19 TO IEC60320 C20 POWER CORD, 2438 [96] LONG
IEC60320 C19 TO NEMA 5-15P POWER CORD, 2438 [96] LONG


NOTES

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
- FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.THE NETWORK CONTROLLER DISPLAY WILL AUTOMATICALLY ROTATE WHEN THE PDU IS RE-ORIENTATED.

TABLE 1

PART NUMBER	DESCRIPTION	COLOR (-XX)	SHIPPING WEIGHT (KG)
SRC01	EL2P MI PDU, 20 AMP, (1)C13, (1)C19 ,C20 INPUT	BLACK (RAL 9005)	3.2

INPUT PLUG FRONT VIEW



20A, 250V MAX RATED INPUT
16A DERATED

COMPLIANCE LABEL VIEW

PANDUIT
18900 Panduit Drive, 60487, USA
www.panduit.com

Power Distribution Unit / Unidad de distribución de Energía

C
62368-1

US

FC

CE

NOM

Model/Modelo: S2-DW016SH/S2-DW016SH
Input/Entrada: 100-120/200-240VAC, 1Ø, 50/60Hz, 16A(EU), OR
100-120/200-240VAC, 1Ø, 50/60Hz, 16A(NA)
Output per Outlet/Salida por Receptáculo:
C13: 200-240VAC, 10A per outlet
C19: 200-240VAC, 16A per outlet
16A Total(EU) OR 16A Total(NA)

CAN ICES-003(A)/NMB-003(A)
Exclusivo para uso interior.
Prohibido su uso en exteriores.
No modificar ni reparar.
Revisarla periodicamente.
Desconectarla cuando no se utilice.
No sobrepasar la corriente indicada.
Conectar la clavija totalmente.

UPC: XXXXXXXXXX
SKU: SRC01
SN: XXXXXXXXXX
MAC: XXXXXXXXXX
Made in / Hecho en TAIWAN

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	09/11/2025	CHF	GLM JHOL	MJD RR0D	RELEASE FOR DV BUILD	SRC01

TITLE

SRC01

CUSTOMER DRAWING

ITEM REVISION NAME

SRC01/00

DATASET FILE NAME

SRC01-DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]

0.125 [0.005]
0.25 [0.010]
0.5 [0.020]
1.0 [0.040]
1.5 [0.060]
2.0 [0.080]
3.0 [0.120]
4.0 [0.160]
6.0 [0.240]
10.0 [0.390]
15.0 [0.590]
20.0 [0.780]
30.0 [1.180]
40.0 [1.570]
50.0 [1.970]
60.0 [2.360]
80.0 [3.150]
100.0 [3.940]
125.0 [4.920]
160.0 [6.300]
200.0 [7.870]
250.0 [9.840]
315.0 [12.400]
400.0 [15.750]
500.0 [19.690]
630.0 [24.800]
800.0 [31.500]
1000.0 [39.370]

THIRD ANGLE PROJECTION

SCALE

3:10

DRAWN BY DATE

CHF 09/11/2025

CHK

GLM JHOL

NOT APPLICABLE

DRAWING NUMBER

SRC01-DC

SHT 1 OF 1

SIZE

D