THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



LEFT VIEW

REAR VIEW

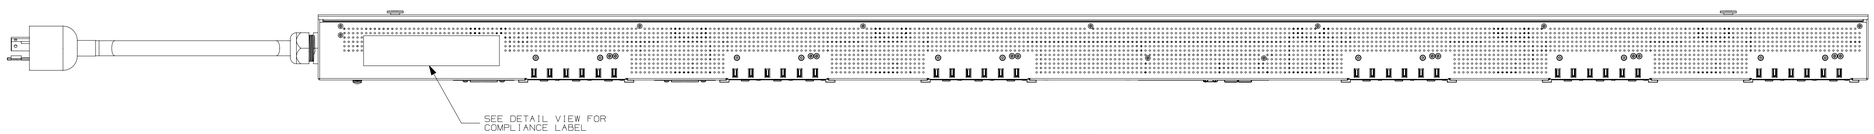


RIGHT VIEW

SPECIFICATION

1. STANDARD:

| | |
|---|---|
| UNIT TYPE: | MI |
| ORIENTATION: | VERTICAL, 0U FULL |
| OUTLET QTY & TYPE: | (18)C13/C15, (18)C13/C15/C19/C21 |
| INPUT VOLTAGE: | 200-240VAC |
| INPUT CURRENT: | 30A(24A DERATED) |
| BREAKER QTY & TYPE: | (2) 20AMP, DOUBLE-POLE |
| INPUT PHASE: | SINGLE PHASE, L-L |
| RATED POWER: | 5 KVA |
| INPUT PLUG: | NEMA L6-30P 3W |
| REGULATORY STANDARD: | RoHS COMPLIANT |

2. ADDITIONAL:
   CORD TYPE: 3W 10AWG SJT

3. ACCESSORIES:
   PRODUCT SAFEY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.

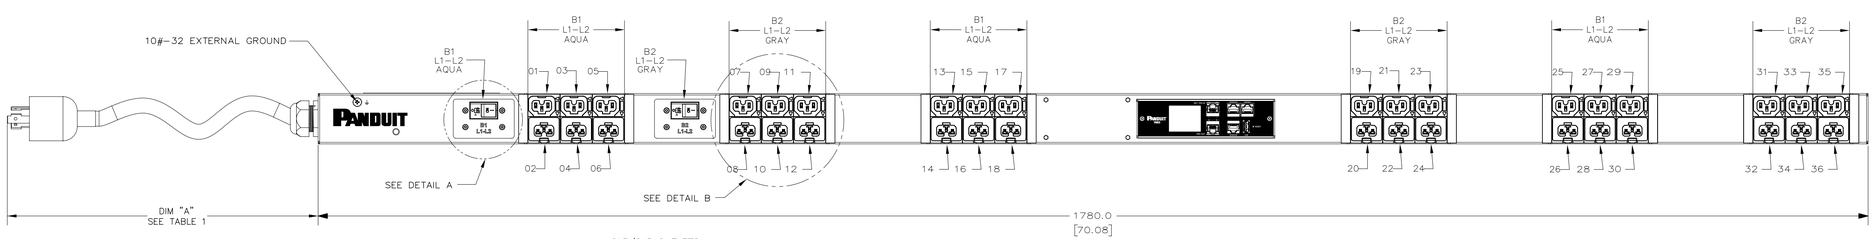


FRONT VIEW




BOTTOM VIEW




DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 2X

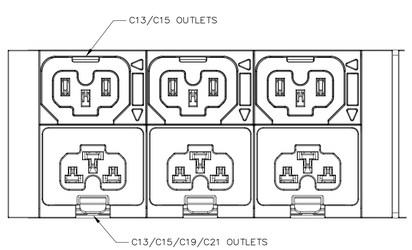


DETAIL B
SCALE 1:1

TABLE 1

| PART NUMBER | DESCRIPTION | DIM A | COLOR (-XX) | SHIPPING WEIGHT (KG) |
|---|---|---|---|---|
| E36D25L | EL2P MI PDU, 30 AMP, (18)C13/C15, (18)C13/C15/C19/C21, NEMA L6-30P | 3000 +254/-127 [118.1 +10/-5] | BLACK (RAL 9005) | 8.5 |

INPUT PLUG FRONT VIEW




COMPLIANCE LABEL VIEW

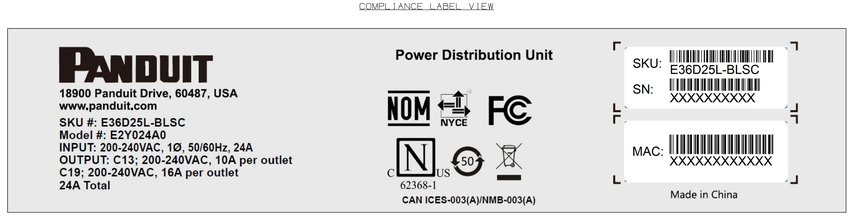


| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 00A | 02/20/2025 | LLJ | GLM JHOL | MJD RROD | RELEASE TO PRODUCTION | E36D25L |

TITLE: E36D25L

CUSTOMER DRAWING

ITEM REVISION NAME: E36D25L/00

DATASET FILE NAME: E36D25L-DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]
ELLIPS ..... ±0.5
ARCS ..... ±0.5
DIA/CORD ..... ±1.5
RADIUS ..... ±2.5
SECTLENGTH ..... ±2.5
SECTANGLE ..... ±4.0
THIRD ANGLE PROJECTION

MATERIAL: NOT APPLICABLE

DRAWING NUMBER: E36D25L-DC

| DRAWN BY | DATE | CHK | SCALE | SHT | SIZE |
|---|---|---|---|---|---|
| LLJ | 02/20/2025 | GLM JHOL | 3:10 | 1 OF 1 | D |

D1D1C0D5/7.8