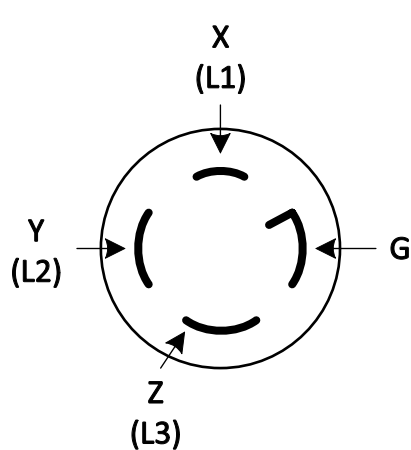


TABLE 1

2

21010000/1A

SPECIFICATION

- | | |
|------------------------------|----------------------------------|
| 1. STANDARD: | |
| UNIT TYPE: | MSPO |
| ORIENTATION: | VERTICAL, OU FULL |
| OUTLET QTY & TYPE: | (24)C13/C15, (24)C13/C15/C19/C21 |
| INPUT VOLTAGE: | 200~240VAC |
| INPUT CURRENT: | 30A(24A DERATED) |
| BREAKER QTY & TYPE: | (3) 20AMP, DOUBLE-POLE |
| INPUT PHASE: | 3 PHASE DELTA, L-L |
| RATED POWER: | 8.6 KVA |
| INPUT PLUG: | NEMA 115~30P 4W |
| REGULATORY STANDARD: | ROHS COMPLIANT |
| | |
| 2. ADDITIONAL: | |
| CORD TYPE: | 4W 10AWG SJT |
| | |
| 3. ACCESSORIES: | |
| PRODUCT SAFETY WARNING SHEET | |

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.