THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



LEFT VIEW

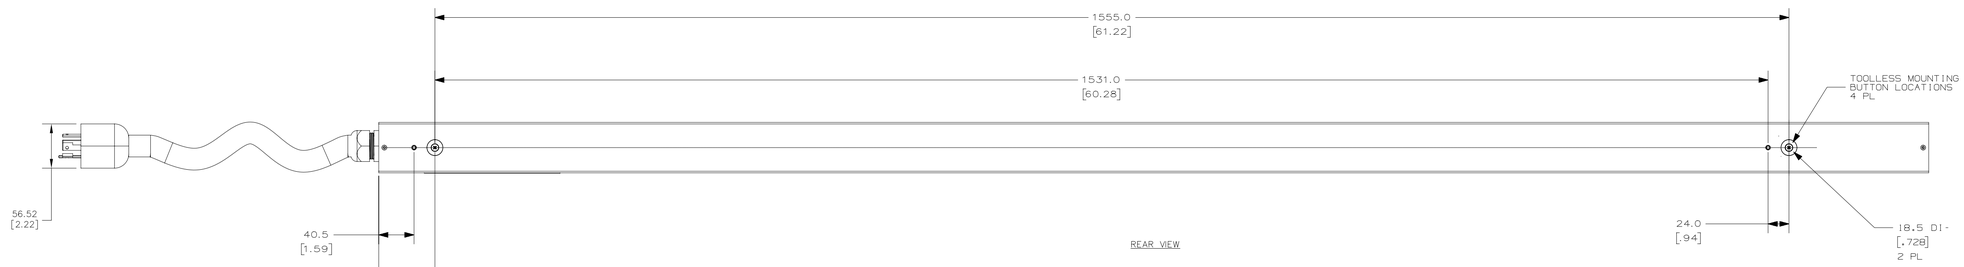

REAR VIEW

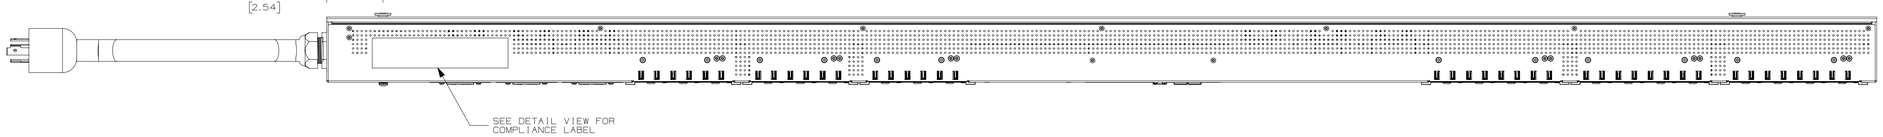

RIGHT VIEW

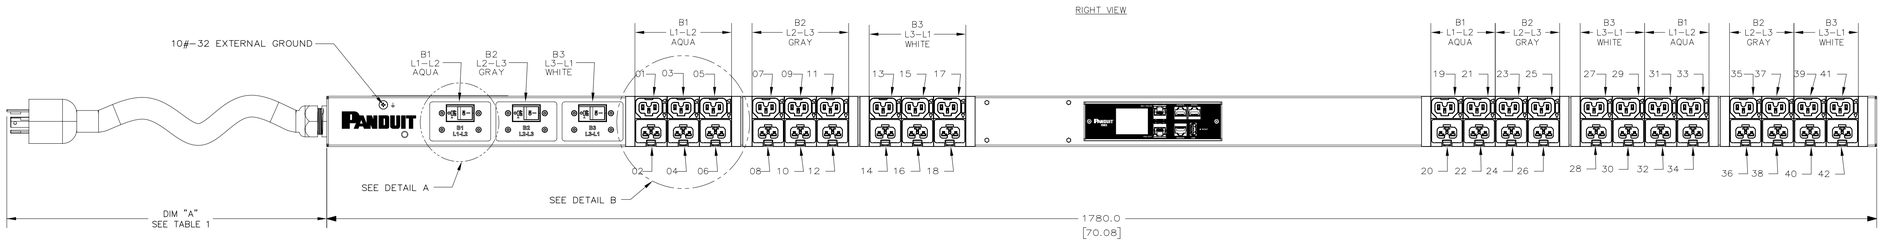

FRONT VIEW



BOTTOM VIEW

SPECIFICATION

1. STANDARD:

UNIT TYPE:	MSPO
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY & TYPE:	(21)C13/C15, (21)C13/C15/C19/C21
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	30A(24A DERATED)
BREAKER QTY & TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	3 PHASE DELTA, L-L
RATED POWER:	8.6 KVA
INPUT PLUG:	NEMA L15-30P 4W
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:
   CORD TYPE:4W 10AWG SJT

3. ACCESSORIES:
   PRODUCT SAFEY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.



DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 3X

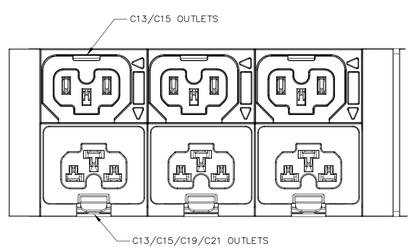

DETAIL B
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E42G04L	EL2P MSPO PDU, 30 AMP, (21)C13/C15, (21)C13/C15/C19/C21 ,NEMA L15-30P	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	10.0

INPUT PLUG FRONT VIEW



COMPLIANCE LABEL VIEW

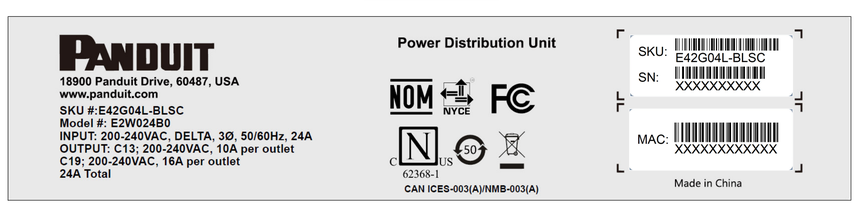

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	02/20/2025	LLJ	GLM JHOL	MJD RROD	RELEASE TO PRODUCTION	E42G04L

TITLE: E42G04L
CUSTOMER DRAWING

ITEM REVISION NAME	E42G04L/00
DATASET FILE NAME	E42G04L-DC/00A
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]	
MATERIAL	NOT APPLICABLE
THIRD ANGLE PROJECTION	
DRAWING NUMBER	E42G04L-DC
DRAWN BY	LLJ
DATE	02/20/2025
CHK	GLM JHOL
SCALE	3:10
SIZE	D
SHT 1 OF 1	

D1010000/1B