THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



LEFT VIEW

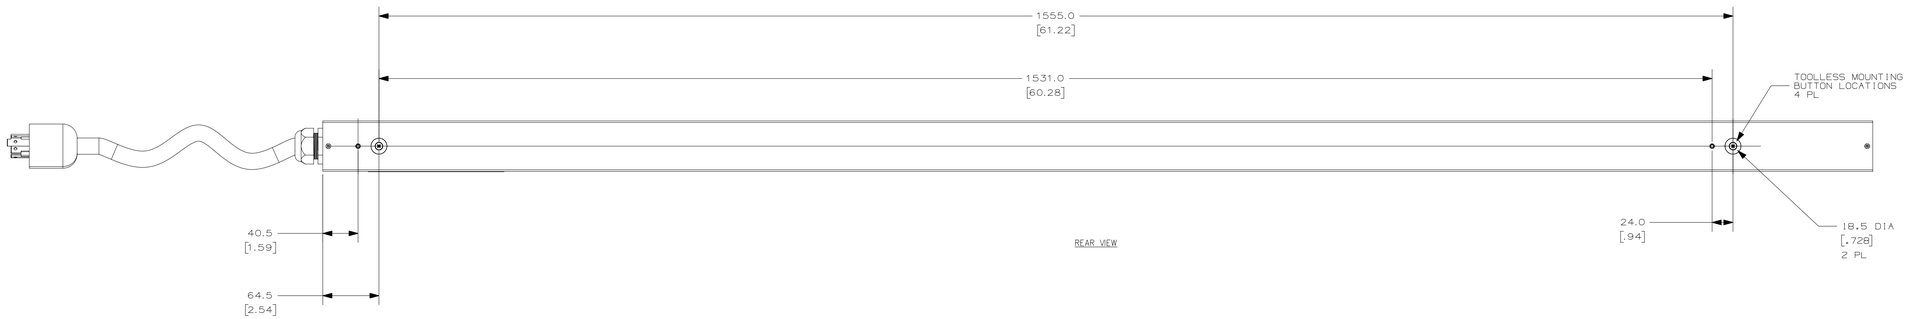

REAR VIEW

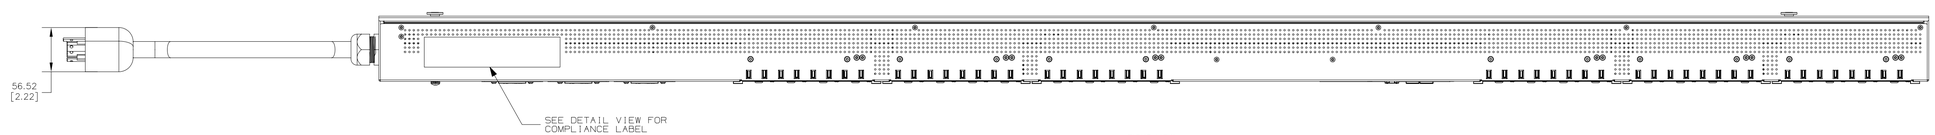

RIGHT VIEW

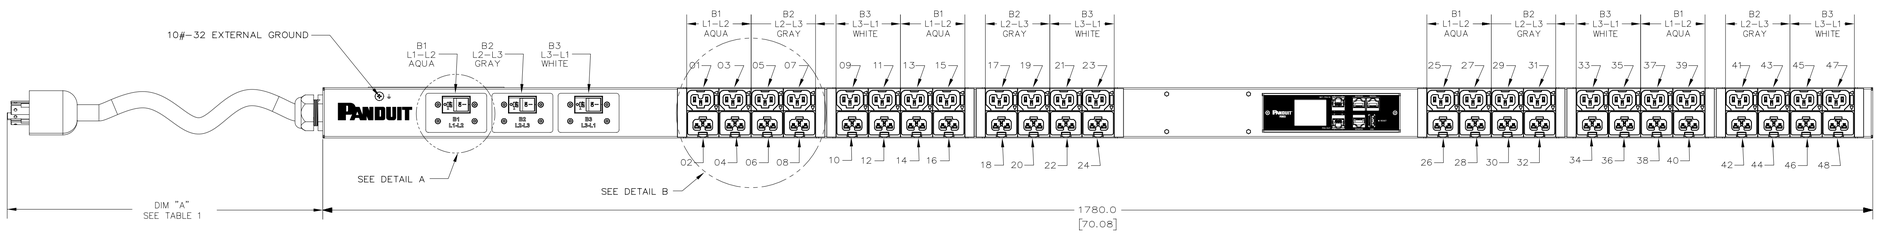

FRONT VIEW



BOTTOM VIEW



DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 3X

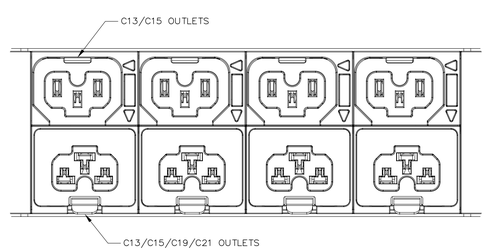

DETAIL B
SCALE 1:1

SPECIFICATION

1. STANDARD:

UNIT TYPE:	MS
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY & TYPE:	(24)C13/C15, (24)C13/C15/C19/C21
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY & TYPE:	(3) 20AMP, DOUBLE-POLE
INPUT PHASE:	3 PHASE DELTA, L-L
RATED POWER:	8.6 KVA
INPUT PLUG:	NEMA L15-30P 4W
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:
   CORD TYPE: 4W 10AWG SJT

3. ACCESSORIES:
   PRODUCT SAFEY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E48E22L	EL2P MS PDU, 30 AMP, (24)C13/C15, (24)C13/C15/C19/C21 ,NEMA L15-30P	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	9.8

INPUT PLUG FRONT VIEW



COMPLIANCE LABEL VIEW

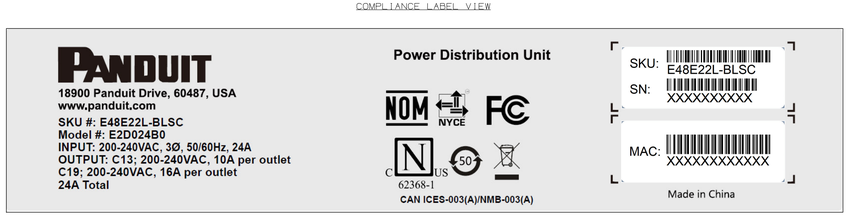

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	02/20/2025	LLJ	GLM JHOL	MJD RROD	RELEASE TO PRODUCTION	E48E22L

TITLE: E48E22L
CUSTOMER DRAWING

ITEM REVISION NAME: E48E22L/00
DATASET FILE NAME: E48E22L-DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]
0-1.49 ..... ±0.5
1.50-2.99 ..... ±0.8
3.00-6.99 ..... ±1.0
7.00-15.99 ..... ±1.5
16.00-29.99 ..... ±2.0
30.00-119.99 ..... ±3.0
120.00-1000 ..... ±4.0
THIRD ANGLE PROJECTION

MATERIAL: NOT APPLICABLE

DRAWING NUMBER: E48E22L-DC

DRAWN BY	DATE	CHK	SCALE	SIZE
LLJ	02/20/2025	GLM JHOL	3:10	D

SHT 1 OF 1