

SPECIFICATION	
1. STANDARD:	
UNIT TYPE:	M1
ORIENTATION:	VERTICAL, OU FULL
OUTLET QTY & TYPE:	(21)C13/C15, (21)C13/C15/C19/C21
INPUT VOLTAGE:	200-240/346-415VAC
INPUT CURRENT:	100A 180A DERATED (NA)/125A (80A DERATED) (EU)
BREAKER QTY & TYPE:	(12) 20AMP, SINGLE-POLE
INPUT PHASE:	3-PHASE WYE, L-N
RATED POWER:	DUAL-RATED: 57,6/55.2 KVA
INPUT PLUG:	IEC 60309 3P+N+E 6h 100A/125A (1P67)


2. ADDITIONAL:	
3. ACCESSORIES:	PRODUCT SAFETY WARNING SHEET

- NOTES
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN INCHES
 2. HEXAGONS ARE USED FOR COMMUNICATION PURPOSES, CIRCLES ARE USED FOR CRITICAL DIMENSIONS, TRIANGLES ARE USED TO IDENTIFY REVISED ITEMS, SQUARES ARE USED TO IDENTIFY BILL OF MATERIAL ITEMS.

TOOLLESS MOUNTING
BUTTON LOCATIONS
4 PL

18.5 DIA
[.728]
2 PLS

24.0
[.94]

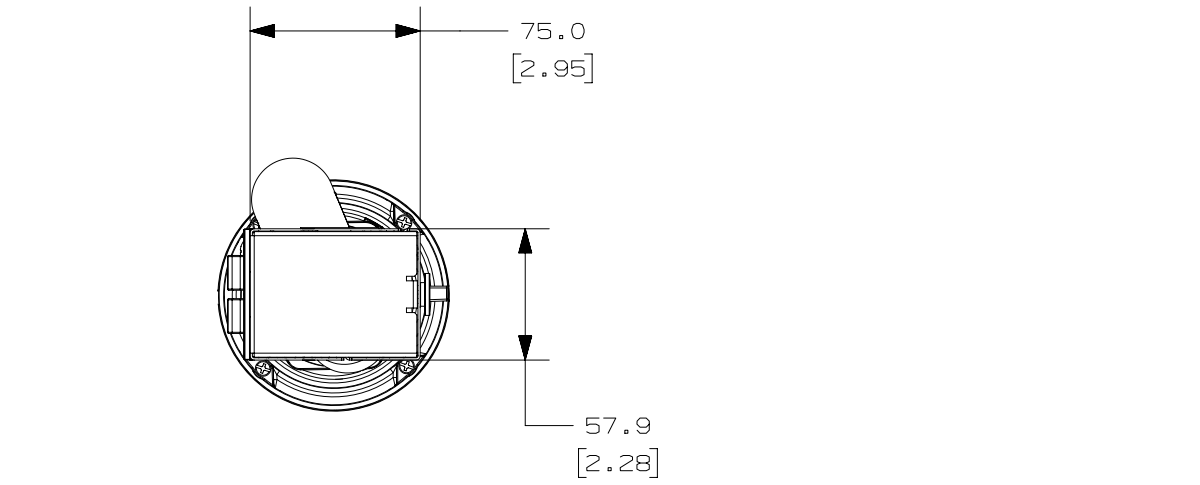

DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 6X

DETAIL B
SCALE 1:1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E42D02L	EL2P 57,6/55,2KW M1 PDU, (21)C13/C15, (21)C13/C15/C19/C21, IEC 60309 3P+N+E 6H 100A/125A (1P67)	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	TBD

TITLE		CUSTOMER DRAWING	
E42D02L		E42D02L-DC/00A	
ITEM REVISION NAME		E42D02L-DC/00A	
DATASET FILE NAME		E42D02L-DC/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm (IN)		NOT APPLICABLE	
THIRD ANGLE PROJECTION		E42D02L-DC	
DRAWN BY		GLM	
DATE		12/16/2025	
CHK		MM	
SCALE		3:10	
SHT 1 OF 1		SHT 1 OF 1	