



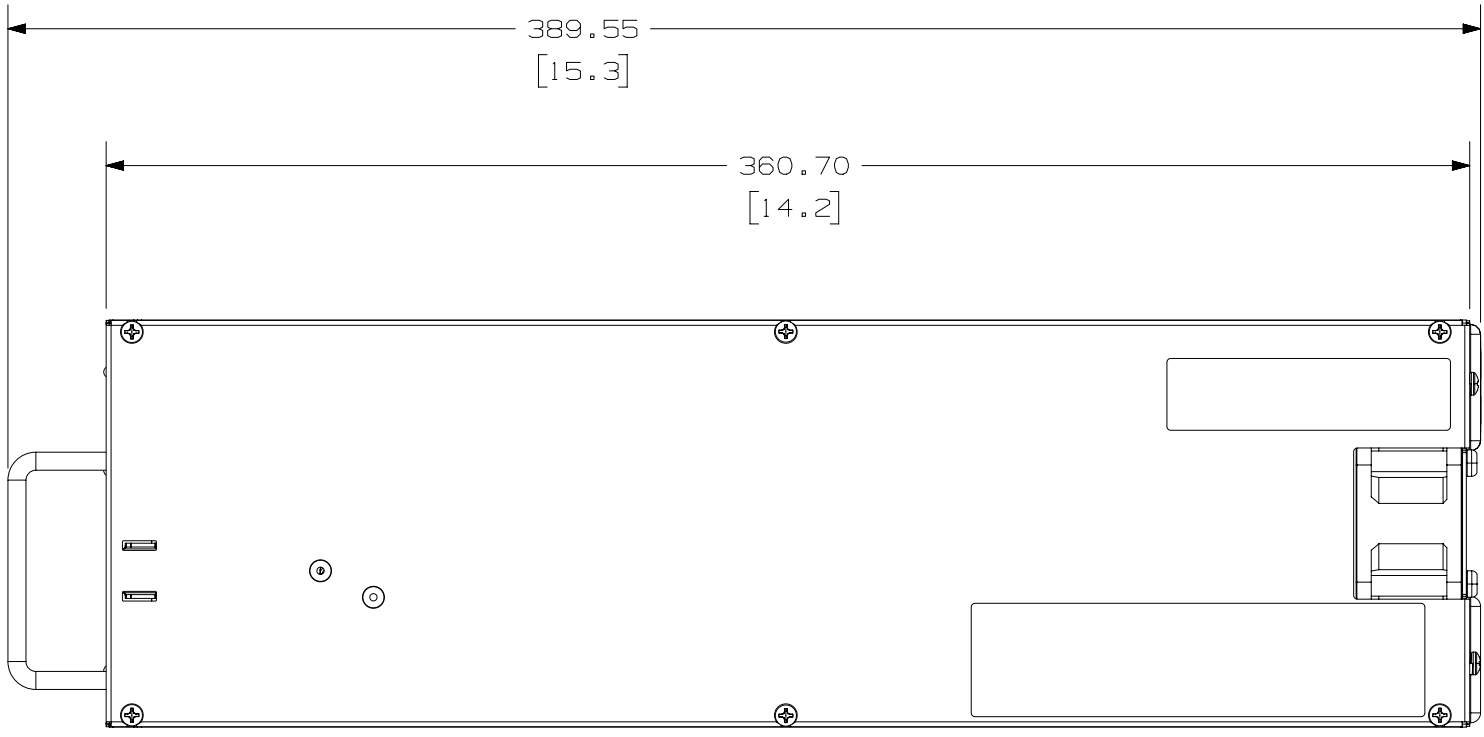


TOP VIEW

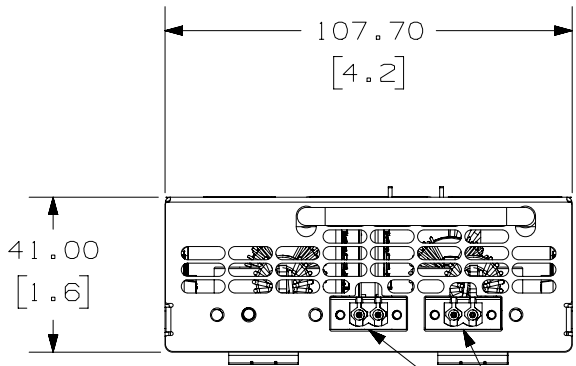


2X TWO-WIRE TERMINAL INPUT

FRONT VIEW

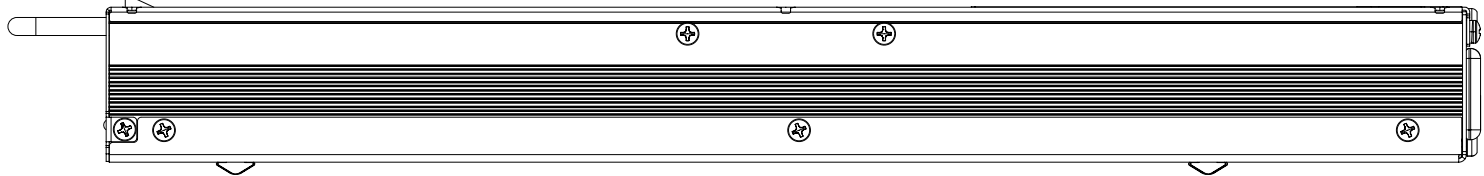


SIDE VIEW

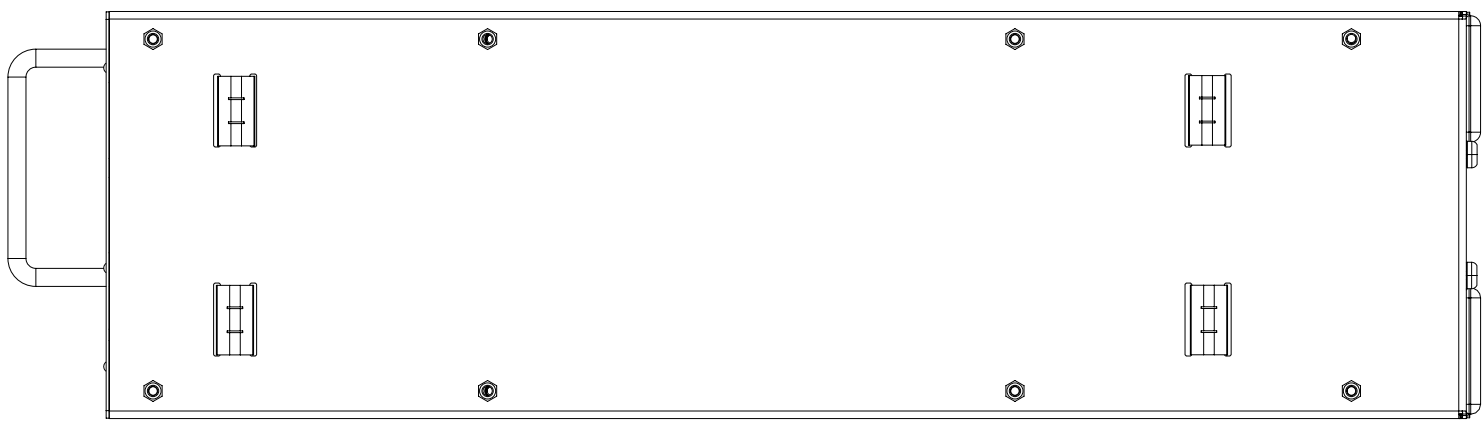

BOTTOM VIEW

2X SAF-D-GRID CONNECTOR OUTPUT

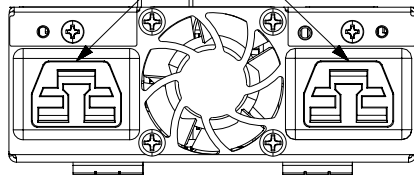

REAR VIEW

SPECIFICATION:

1. STANDARD:

INPUT TYPE: (2) TWO-WIRE SCREW TERMINAL
INPUT VOLTAGE: 380 VDC PULSES FROM TRANSMITTER
OUTPUT TYPE: (2) SAF-D-GRID CONNECTOR
OUTPUT VOLTAGE: 385 VDC $\pm 1\%$
OUTPUT CURRENT: 5.2A (2.6A PER CHANNEL)
OUTPUT POWER: 2kW (1kW PER CHANNEL)

2. ADDITIONAL:


N/A

3. ACCESSORIES

- (1) NON-INSULATED RING TERMINAL (PANDUIT P/N P10-6R)
- (1) #6-32 GROUNDING SCREW
- (2) SAF-D-GRID TO SAF-D-GRID 2m BLACK POWER CABLE

NOTES:

- 1. PRIMARY DIMENSIONS ARE IN METRIC. SECONDARY DIMENSIONS ARE IN [INCHES].
- 2. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.

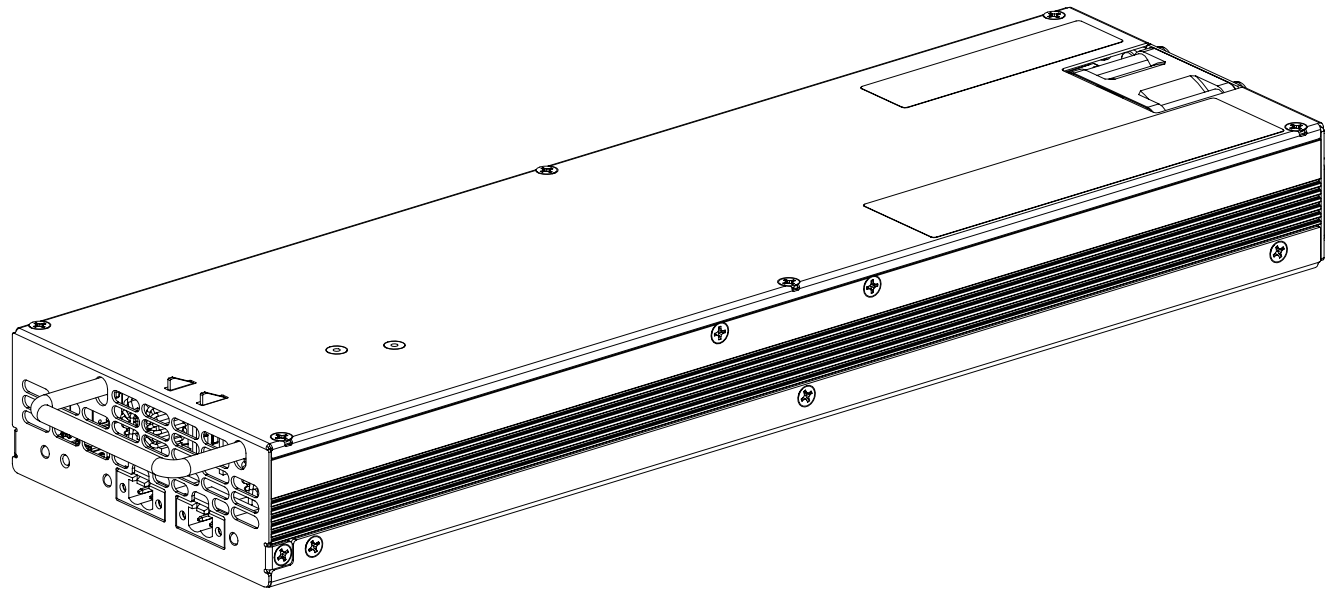

ARTWORK_ON_FRONT



ARTWORK_ON_TOP

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00B	4-7-26	MRWA	RR0D		INITIAL RELEASE COMPLETELY REDRAWN	
00A					REVISION NOT RELEASED	

PART NUMBER		PXR1ALK	
TITLE		FMPS 2-CHANNEL RECEIVER, 2kW, 380VDC	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		04326NAA-DC/00B	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		PANDUIT	
X. ± 1 [0.04]		X.XX ± 0.2 [.008]	
X.X ± 0.5 [0.02]		ANGLES ± 1°	
THIRD ANGLE PROJECTION		DRAWING NUMBER: 04326NAA-DC	
DRAWN BY	DATE	CHK	SCALE
MRWA	4-7-26	RR0D	1:2
SHT 1 OF 2			SIZE A2