




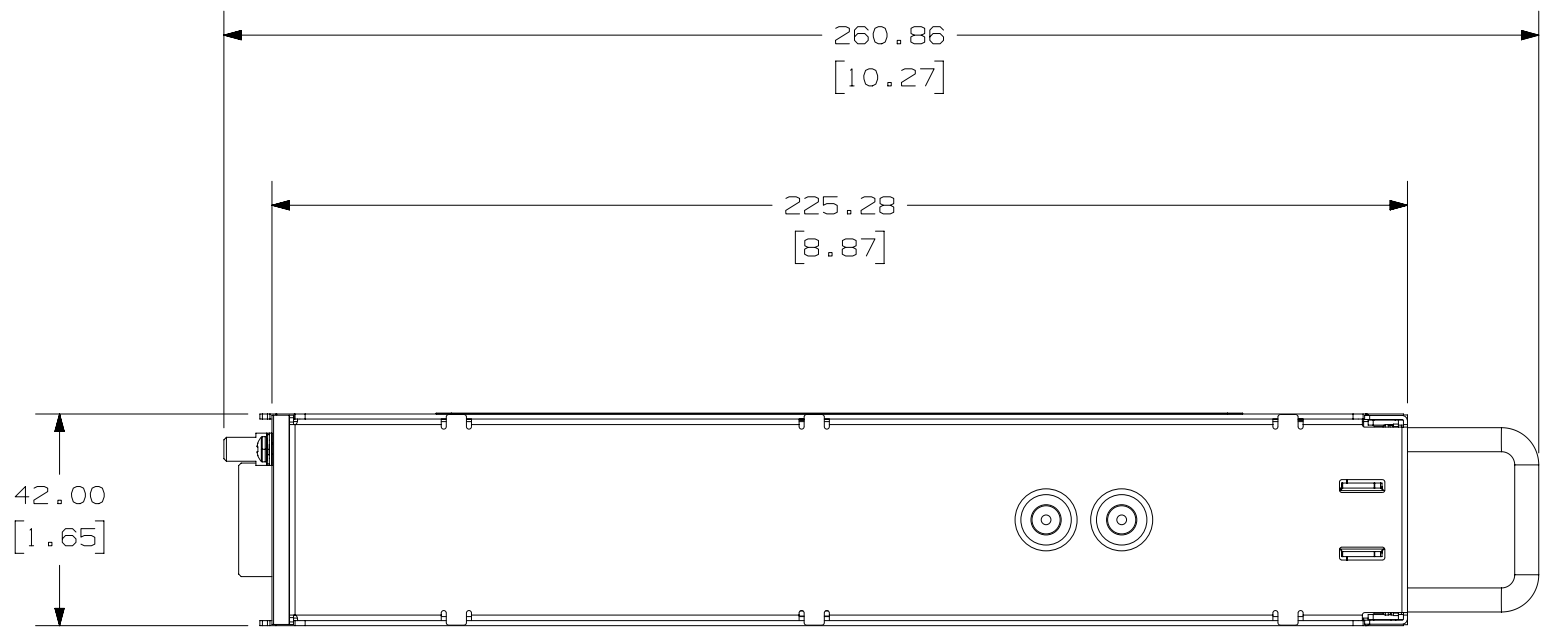


TOP VIEW




REAR VIEW

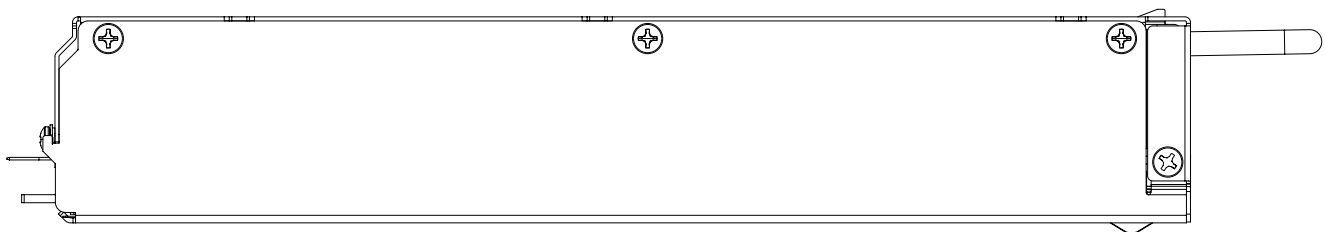

SIDE VIEW

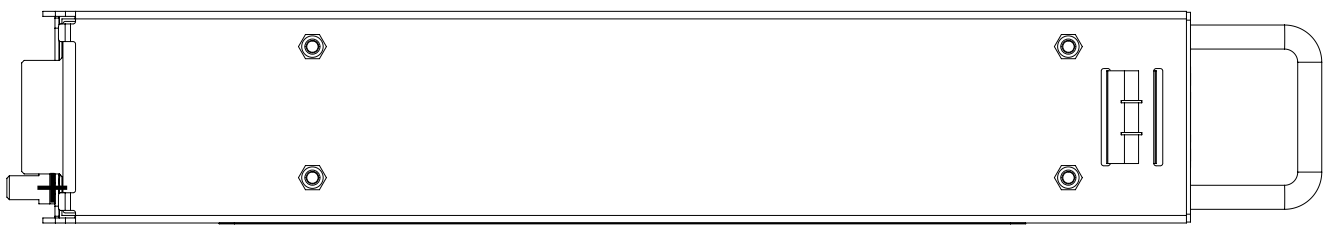

BOTTOM VIEW

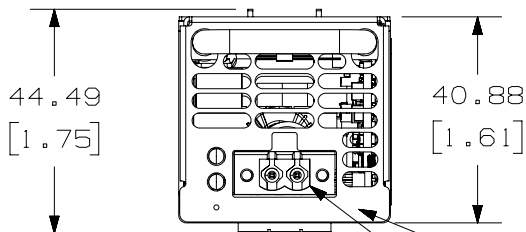

FRONT VIEW

SEE BELOW FOR ARTWORK



TWO-WIRE TERMINAL OUTPUT

SPECIFICATION

1. STANDARD
OUTPUT VOLTAGE: ± 180 VDC PULSES (2ms ON, MAX DUTY CYCLE OF 66%)
OUTPUT CURRENT: 3.3 AMPS PEAK MAX, LIMITED ON EACH PULSE
RATED POWER: 1000 W
REGULATORY STANDARD: UL 1400-1; IEC 61508-1, -2; UL 62368-1 3rd ED.
2. ACCESSORIES:
5mm TERMINAL BLOCK ASSEMBLY (BLACK)


NOTES

1. PRIMARY DIMENSIONS ARE IN METRIC, SECONDARY DIMENSIONS IN [INCHES].
2. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
3. WEIGHT: 0.50 kg [1.1 lbs.]

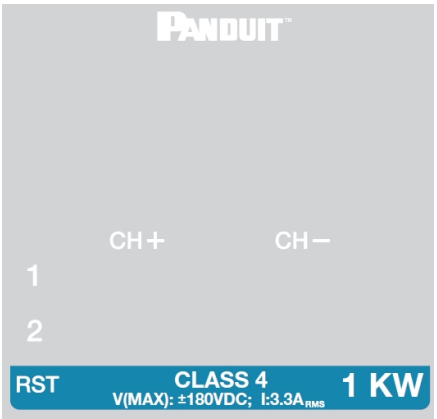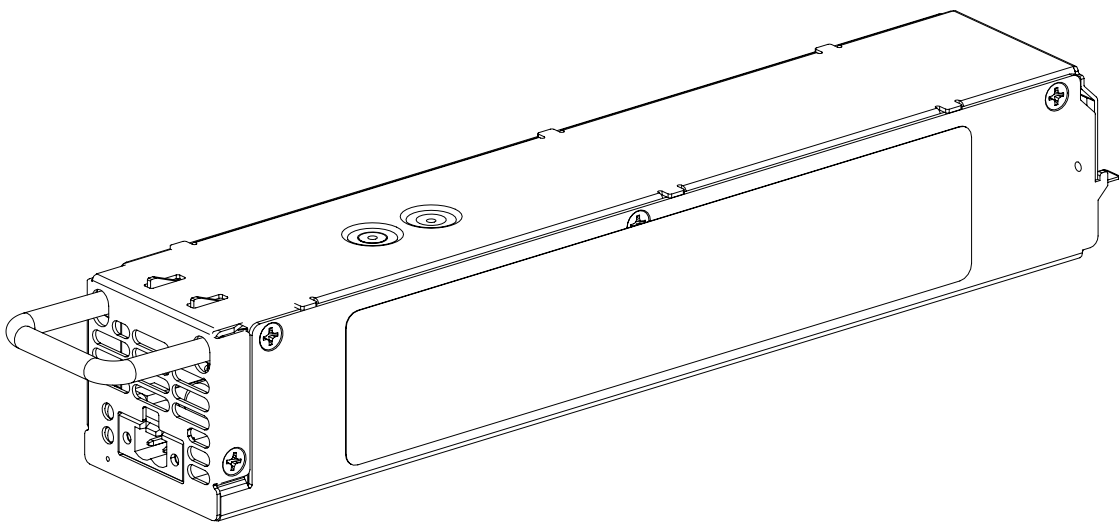

ARTWORK ON FRONT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	4-7-26	MRWA	RR0D		INITIAL RELEASE	

PART NUMBER				PXTM1AH			
TITLE							
FMPS CLASS 4 TRANSMITTER MODULE 1kW							
CUSTOMER DRAWING							
ITEM REVISION NAME				PANDUIT			
01959NAK/02							
DATASET FILE NAME							
01959NAK-DC/02A							
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]				MATERIAL:			
.XX ± 0.8 [.03] .XXX ± .XX ± 0.46 [.018] ANGLES ± 1°							
				DRAWING NUMBER:			
THIRD ANGLE PROJECTION				01959NAK - DC			
DRAWN BY		DATE		CHK		SCALE	
MRWA		4-7-26		RR0D		2:3	
SHT 1 OF 1						A2	