


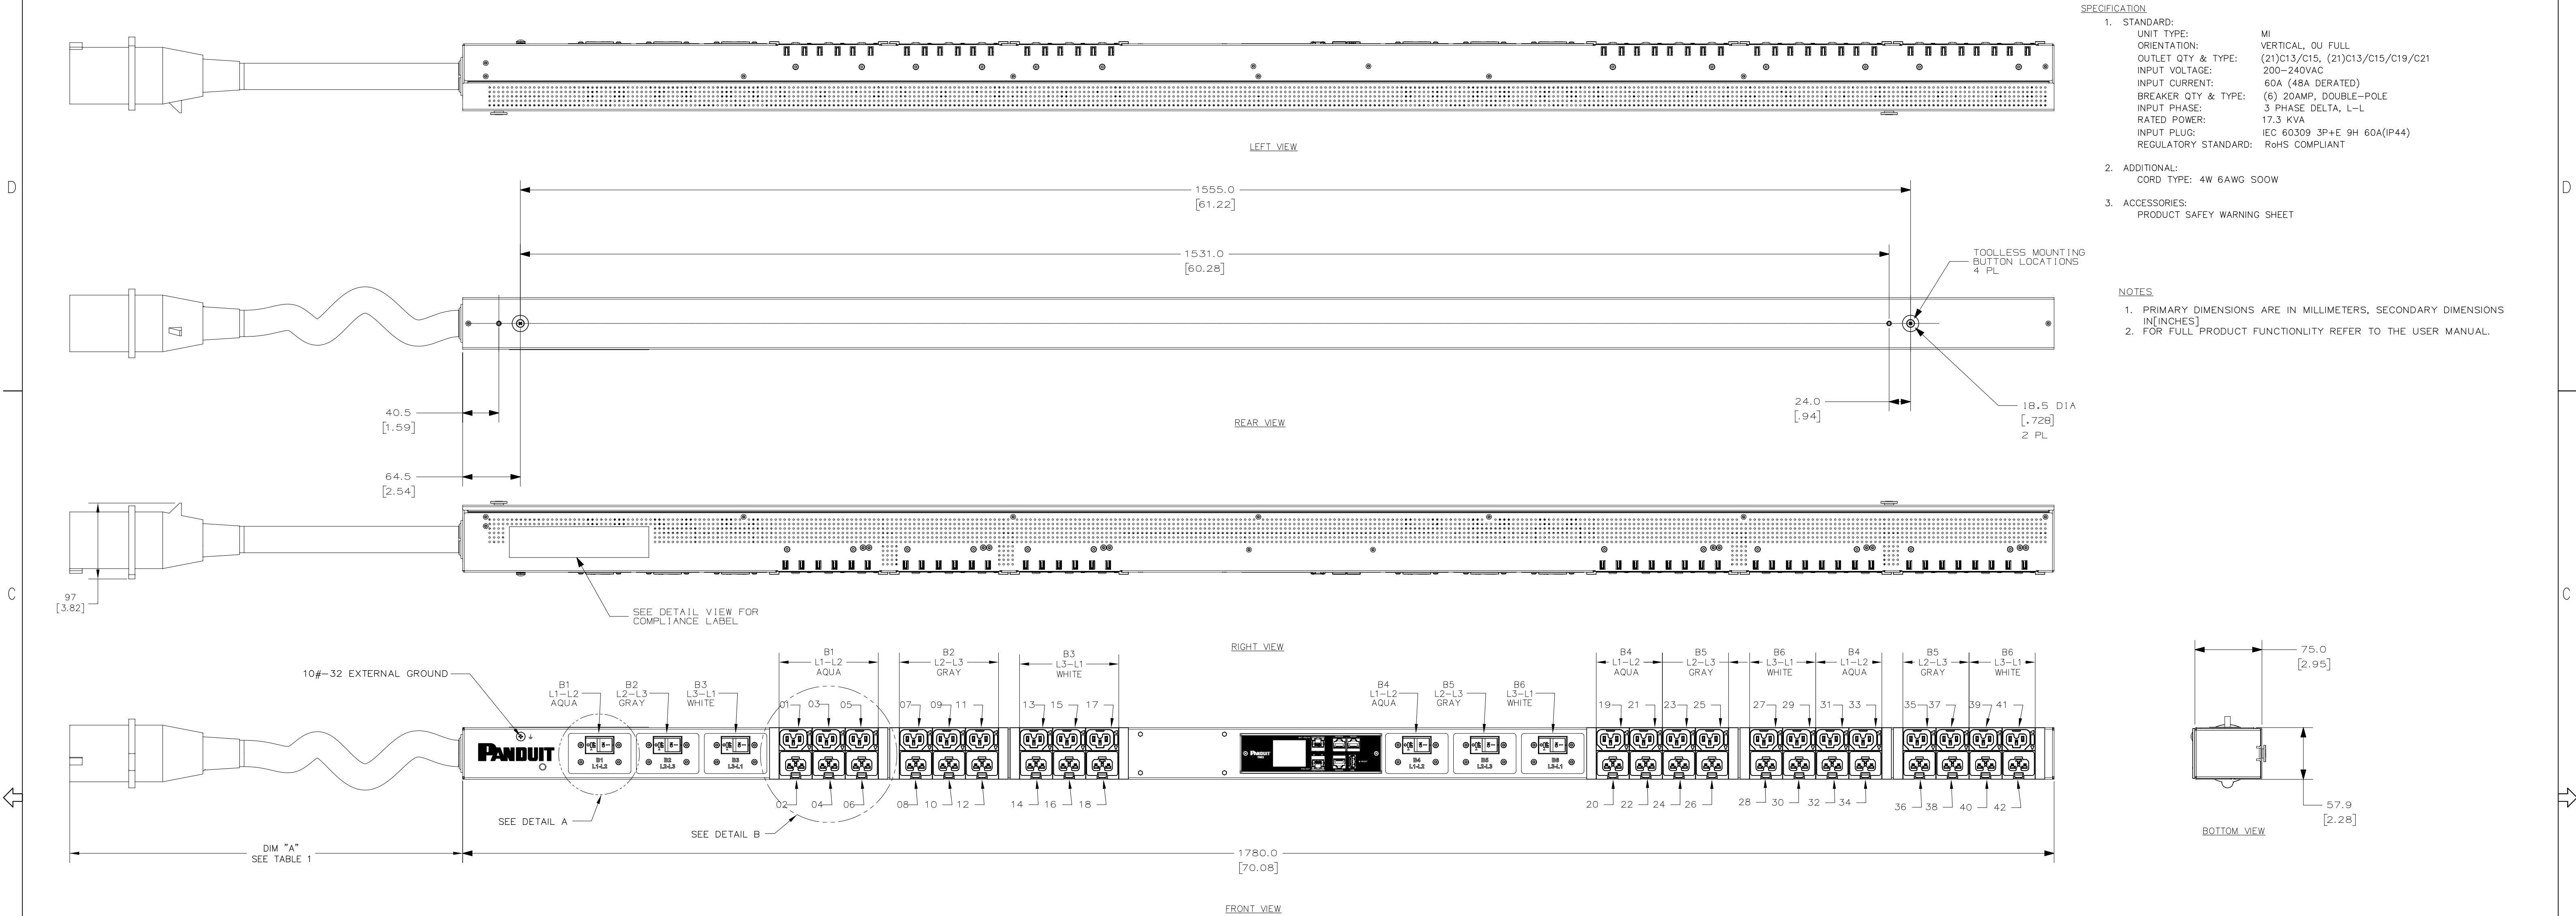

- SPECIFICATION
1. STANDARD:

UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
REGULATORY STANDARD:

MI
VERTICAL, OU FULL
(21)C13/C15, (21)C13/C15/C19/C21
200-240VAC
60A (48A DERATED)
(6) 20AMP, DOUBLE-POLE
3 PHASE DELTA, L-L
17.3 KVA
IEC 60309 3P+E 9H 60A(IP44)
RoHS COMPLIANT
2. ADDITIONAL:

CORD TYPE: 4W 6AWG SOOW
3. ACCESSORIES:

PRODUCT SAFETY WARNING SHEET

- NOTES
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]

2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.

PART NUMBER		DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E42D20L		EL2P MI PDU, 60 AMP, (21)C13/C15, (21)C13/C15/C19/C21, IEC 60309 3P+E 9h 60A (IP44)	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	14

INPUT PLUG FRONT VIEW

L1

L2

L3

G

COMPLIANCE LABEL VIEW

Panduit
18900 Panduit Drive, 60487, USA
www.panduit.com
SKU #: E42D20L-BLSC
Model #: B2W048B0
INPUT: 200-240VAC, DELTA, 3Ø, 50/60Hz, 48A
OUTPUT: C13; 200-240VAC, 10A per outlet
C19; 200-240VAC, 16A per outlet
48A Total

NOMNYCE

FC

62368-1

CAN ICES-003(A)/NMB-003(A)

SKU: E42D20L-BLSC

SN: XXXXXXXXXX

MAC: XXXXXXXXXXXXX

Made in China

TABLE 1

PART NUMBER		DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E42D20L		EL2P MI PDU, 60 AMP, (21)C13/C15, (21)C13/C15/C19/C21, IEC 60309 3P+E 9h 60A (IP44)	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	14

ITEM REVISION NAME

E42D20L/00

DATASET FILE NAME

E42D20L-DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]

DRAWN BY DATE

LLJ 02/20/2025

CHK

GLM

DATE

02/20/2025

BY

LLJ

APR

MJD

RELEASE TO PRODUCTION

E42D20L

THIRD ANGLE PROJECTION

SCALE

3:10

DRAWING NUMBER:

E42D20L-DC

SHT 1 OF 1

SIZE

D