

TABLE 1



REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY LLJ	DATE 02/06/2025	CHK GLM	SCALE 3:10	SHT 1 OF 1	SIZE D
-----	------	----	-----	-----	-------------	-----	-----------------	--------------------	------------	---------------	---------------	-----------

SPECIFICATION

- | | |
|------------------------------|----------------------------------|
| 1. STANDARD: | |
| UNIT TYPE: | MI |
| ORIENTATION: | VERTICAL, 0U FULL |
| OUTLET QTY & TYPE: | (24)C13/C15, (24)C13/C15/C19/C21 |
| INPUT VOLTAGE: | 100-120/200-240VAC |
| INPUT CURRENT: | 30A(24A DERATED) |
| BREAKER QTY & TYPE: | (3) 20AMP, DOUBLE-POLE |
| INPUT PHASE: | 3 PHASE WYE, L-L |
| RATED POWER: | 8.6 KVA |
| INPUT PLUG: | NEMA L21-30P 5W |
| REGULATORY STANDARD: | RoHS COMPLIANT |
| | |
| 2. ADDITIONAL: | |
| CORD TYPE: | 5W 10AWG SJT |
| | |
| 3. ACCESSORIES: | |
| PRODUCT SAFETY WARNING SHEET | |

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.

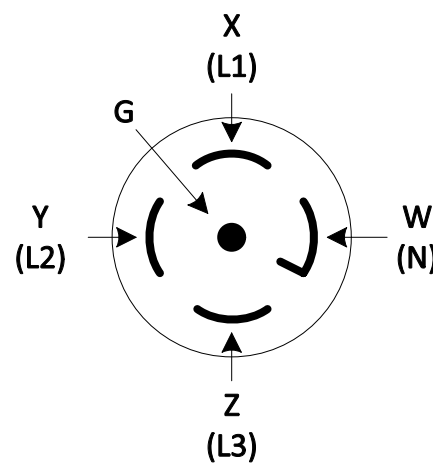

COMPLIANCE LABEL VIEW



18900 Panduit Drive, 60487, USA
www.panduit.com
SKU #: E48D21L-BLSC
Model #: E2Y024C0
INPUT: 100-120/200-240VAC, WYE, 3Ø, 50/60Hz, 24A
OUTPUT: C13; 200-240VAC, 10A per outlet
C19; 200-240VAC, 16A per outlet
24A Total

Power Distribution Unit



62368-1
CAN ICES-003(A)/NMB-003(A)



SKU: E48D21L-BLSC



SN: XXXXXXXXXXXX



MAC: XXXXXXXXXXXXX

Made in China

[illegible]